

ATLANTA, GEORGIA

AL-26 (FAA)

25219

RNAV (GPS) PRM Y RWY 10
(SIMULTANEOUS CLOSE PARALLEL)
HARTSFIELD/JACKSON ATLANTA INTL (ATL)

WAAS CH 40399 W10A	APP CRS 095°	Rwy Ldg TDZE 1000 Apt Elev 1026
--	------------------------	---

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to 1½ mile. Simultaneous close parallel approach authorized with ILS PRM and RNAV PRM Rwy 8L or 8R or 9L or 9R, or Rwys 8L and 9L, or Rwys 8L and 9R, or Rwys 8R and 9L, or Rwys 8R and 9R. See additional requirements on AAUP. Dual VHF comm required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.





MISSED APPROACH:
Climb to 1500 then
climbing right turn to
3000 direct SCARR
and hold.


D-ATIS ARR 119.65 DEP 125.55	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4 PRM 133.425	ALL RWYS 121.9 121.75 121.65 254.4
--	--	--	---

GND CON ALL
(8L-26R,8R-26L) (9L-27R,9R-27L) 10-28 RWYS
121.9 121.75 121.65 254.4

CLNC DEL 118.1	CPDLC
-----------------------------	-------

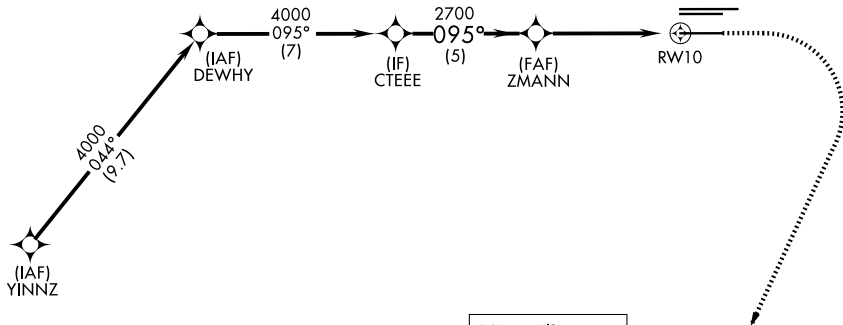


RADAR REQUIRED



ELEV 1026 **D** TDZE 1000

				1500 ↑		3000 ↗		SCARR △	
DEWHY		CTEEE		ZMANN		RW10			
4000		4000		2700					
GP 3.00° TCH 55				2700					
7 NM		5 NM		5.2 NM					
CATEGORY	A	B	C	D					
LPV DA	1200/18		200 (200-½)						
LNAV/ VNAV	DA	1455/55		455 (500-1)					



095°

HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R,
27L and 28

ATLANTA, GEORGIA
Orig-A 12OCT17

33°38'N-84°26'W

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

RNAV (GPS) PRM Y RWY 10 (SIMULTANEOUS CLOSE PARALLEL)

SE-4, 04 SEP 2025 to 02 OCT 2025

SE-4, 04 SEP 2025 to 02 OCT 2025