

WAAS CH 97400 W09B	APP CRS 095°	Rwy Ldg 9000 TDZE 1026 Apt Elev 1026
--	------------------------	---

RNAV (GPS) RWY 9R

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

T

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 8L or 8R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.



ALSF-2



MISSED APPROACH: Climb to 4000 direct RATCH and on track 092° to CONNI and hold.


D-ATIS	ATLANTA	ATLANTA TOWER						GND CON				
ARR 119.65	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	ALL RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	ALL RWYS	
DEP 125.55	127.9	379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

CLNC DEL 118.1	CPDLC
-----------------------------	-------


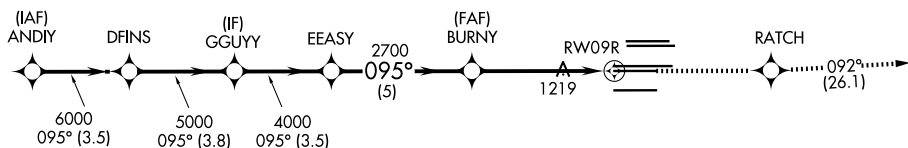


RADAR REQUIRED

MISSED APCH FIX
CONNI



ELEV 1026		TDZE 1026
-----------	---	-----------

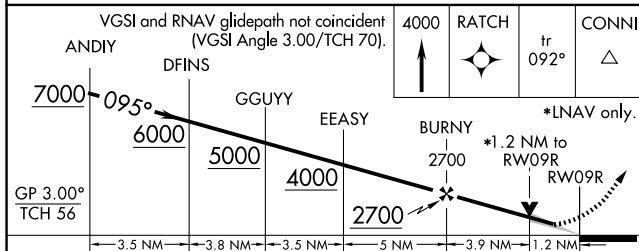

CATEGORY	A	B	C	D
LPV DA	1226/18		200 (200-½)	
LNAV/ VNAV DA	1403/40		377 (500-¾)	
LNAV MDA	1480/24	454 (500-½)	1480/45	454 (500-¾)

HIRL all Rwy's
TDZ/CL Rwy's 8L, 9R, 10, 26R,
27L and 28