

25051

LOC/DME I-RGS 110.15 Chan 38 (Y)	APP CRS 183°	Rwy Idg 9000 TDZE 744 Apt Elev 748
--	------------------------	---

ILS RWY 18R (SA CAT I)
CHARLOTTE/DOUGLAS INTL (CLT)

RADAR required for procedure entry. DME or RADAR required.

T Simultaneous approach authorized.
Requires specific OPSPEC, MSPEC or LOA approval and use of HUD to DH.

ALSF-2



MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 on CLT VOR/DME R-250 to STULL INT/CLT 13 DME and hold, continue climb-in-hold to 4000.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON	CLNC DEL
ARR 121.15	(001°-119°) 128.32	(Rwys 18L-36R) 118.1 257.8			121.8 348.6 (WEST)	127.15
DEP 132.1	(120°-295°) 120.05	(Rwy 18C-36C) 126.4 257.8			121.9 348.6 (EAST)	348.6
	(296°-360°) 134.75	(Rwy 18R-36L) 133.35 257.8				
	(180°-359°) 257.2					
	(360°-179°) 307.8					CPDLC

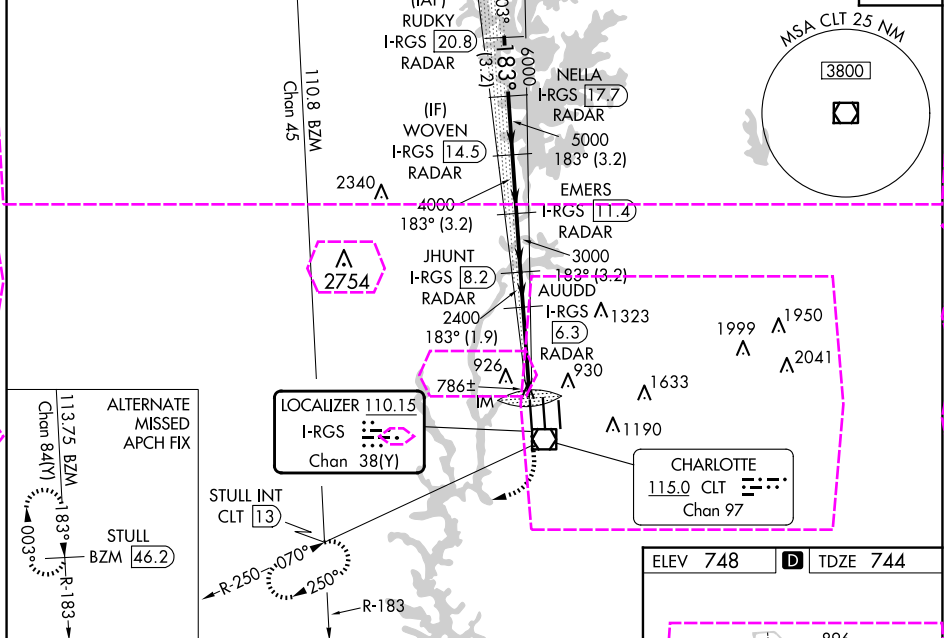


Diagram illustrating the RA 228/14 ILS glidepath and associated radar stations.

ILS Parameters:

- GS 3.00° TCH 55
- VGSi and ILS glidepath not coincident (VGSi Angle 2.80/TCH 65).

Radar Stations and I-RGS Values:

- RUDKY I-RGS 20.8
- NELLA I-RGS 17.7
- WOVEN I-RGS 14.5
- EMERS I-RGS 11.4
- JHUNT I-RGS 8.2
- AUUDD I-RGS 6.3

Altitude and Distance Markers:

- Altitudes: 7000, 6000, 5000, 4000, 3000, 2400
- Distances: 3.2 NM, 3.2 NM, 3.2 NM, 3.2 NM, 1.9 NM, 5 NM


Diagram Labels:

- IM (Instrument Meteorological Condition)
- CLT R-250
- STULL INT

Category and Frequency:

- CATEGORY A
- RA 228/14 150 DA 894

SA CATEGORY I ILS SPECIAL AIRCREW
& AIRCRAFT CERTIFICATION REQUIRED

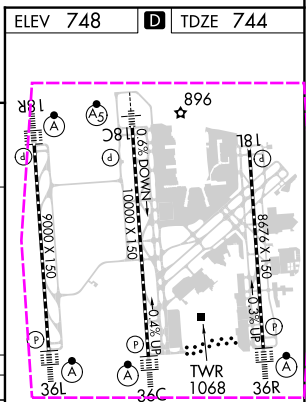

HIRL all Rwy's
REIL Rwy's 18L and 23
TDZ/CI Rwy's 18R, 36L, 36C and 36R

LOC/DME I-RGS 110.15 Chan 38 (Y)	APP CRS 183°	Rwy Ldg 9000 TDZE 744 Apt Elev 748
--	------------------------	---

ILS RWY 18R (SA CAT I)
CHARLOTTE/DOUGLAS INTL (CLT)

RADAR required for procedure entry. DME or RADAR required.



T Simultaneous approach authorized.
Requires specific OPSPEC, MSPEC or LOA approval and use of HUD to DH.

ALSF-2




MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 on CLT VOR/DME R-250 to STULL INT/CLT 13 DME and hold, continue climb-in-hold to 4000

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON	
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1	257.8 (Rwys 18L-36R)	121.8	348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4	257.8 (Rwy 18C-36C)	121.9	348.6 (E)
	134.75 (296°-360°)		133.35	257.8 (Rwy 18R-36L)		

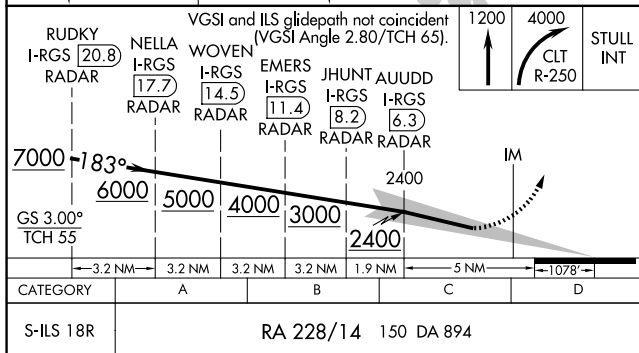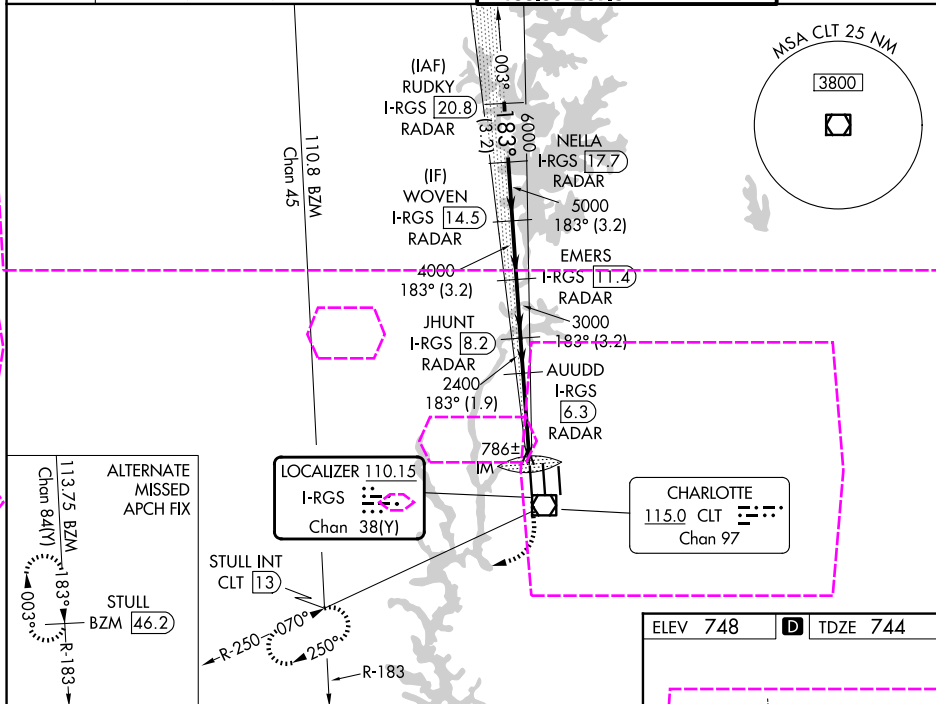

SA CATEGORY I ILS SPECIAL AIRCREW
& AIRCRAFT CERTIFICATION REQUIRED

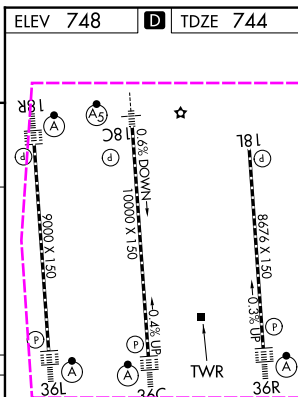

HIRL all Rwy's
REIL Rwy's 18L and 23
TDZ/CL Rwy's 18R, 36L, 36C and 36R

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025