

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

25051

LOC/DME I-PEP 111.3 Chan 50	APP CRS 183°	Rwy Idg 3000 TDZE 742 Apt Elev 748
--	------------------------	---

ILS or LOC RWY 18C

CHARLOTTE/DOUGLAS INTL (CLT)

RADAR required for procedure entry. DME or RADAR required





⚠ Circling NA at night. Simultaneous approach authorized. For inop ALS, increase S-LOC 18C Cat C/D visibility to 1 $\frac{1}{2}$ SM.

⚠ ** RVR 1800 authorized with the use of FD or AP or HUD to DA.



MISSED APPROACH: Climb to 3000 on CLT VOR/DME R-181 to DENNE INT/CLT 12.7 DME/RADAR and hold.

D-ATIS ARR 121.15 DEP 132.1	CHARLOTTE APP CON (001°-119°) 128.32 (120°-295°) 120.05 (296°-360°) 134.75 (180°-359°) 257.2 (360°-179°) 307.8	CHARLOTTE TOWER (Rwys 18L-36R) 118.1 257.8 (Rwy 18C-36C) 126.4 257.8 (Rwy 18R-36L) 133.35 257.8	GND CON 121.8 348.6 (WEST) 121.9 348.6 (EAST)	CLNC DEL 127.15 348.6
---	--	---	---	---------------------------------

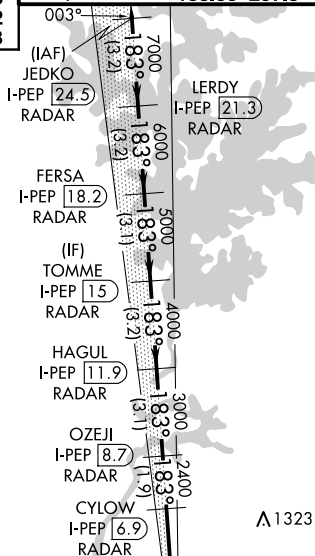



Λ 2754

Λ 1323

Λ 1950

Λ 1999

Λ 2041





Λ 930

Λ 926

1633

ELEV 748 D TDZE 742

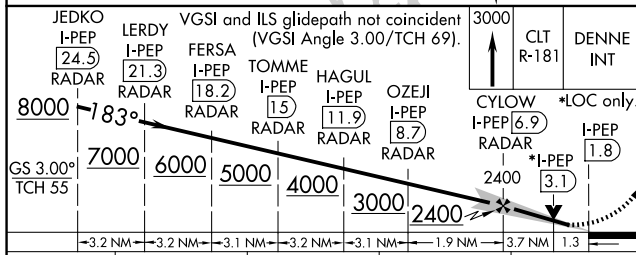

CATEGORY	A	B	C	D
S-ILS 18C **	942/24 200 (200- $\frac{1}{2}$)			
S-LOC 18C	1220/24 478 (500- $\frac{1}{2}$)		1220/50 478 (500-1)	
CIRCLING	1380-1 632 (700-1)		1500-2 $\frac{1}{4}$ 752 (800-2 $\frac{1}{4}$)	1500-2 $\frac{1}{2}$ 752 (800-2 $\frac{1}{2}$)

HIRL all Rwys
REIL Rwys 18L and 23
TDZ/CL Rwys 18R, 36L, 36C and 36R

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

CHARLOTTE, NORTH CAROLINA

Amdt 11 15AUG19

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)

ILS or LOC RWY 18C

SE-2, 04 SEP 2025 to 02 OCT 2025

SE-2, 04 SEP 2025 to 02 OCT 2025

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

25275

LOC/DME I-PEP 111.3 Chan 50	APP CRS 183°	Rwy Ldg 3000 TDZE 742 Apt Elev 748
--	------------------------	---

ILS or LOC RWY 18C

CHARLOTTE/DOUGLAS INTL (CLT)

RADAR required for procedure entry. DME or RADAR required


⚠ Circling NA at night. Simultaneous approach authorized. For inop ALS, increase S-LOC 18C Cat C/D visibility to 1 $\frac{1}{2}$ SM.

⚠ RVR 1800 authorized with the use of FD or AP or HUD to DA





MISSED APPROACH: Climb to 3000 on CLT VOR/DME R-181 to DENNE INT/CLT 12.7 DME/RADAR and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 257.2 (180°-359°) 120.05 (120°-295°) 307.8 (360°-179°) 134.75 (296°-360°)	118.1 257.8 (Rwys 18L-36R) 126.4 257.8 (Rwy 18C-36C) 133.35 257.8 (Rwy 18R-36L)	121.8 348.6 (W) 121.9 348.6 (E)

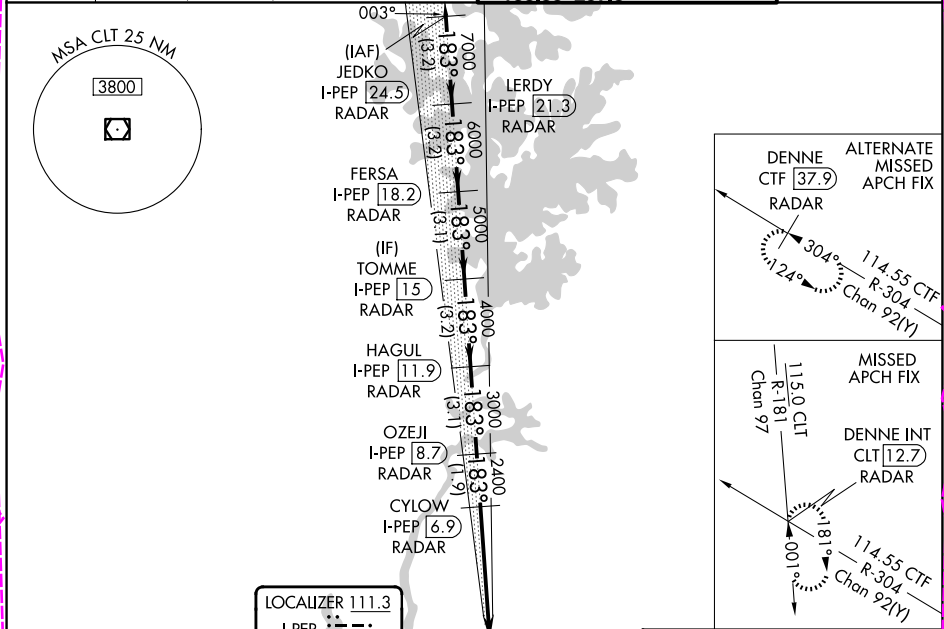

LOCALIZER 111.3 I-PEP Chan 50	CHARLOTTE 115.0 CLT Chan 97
--	--

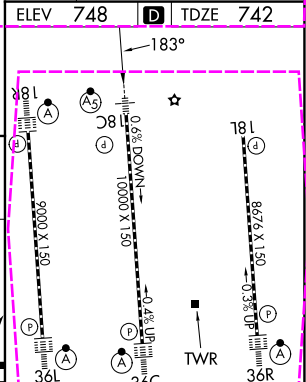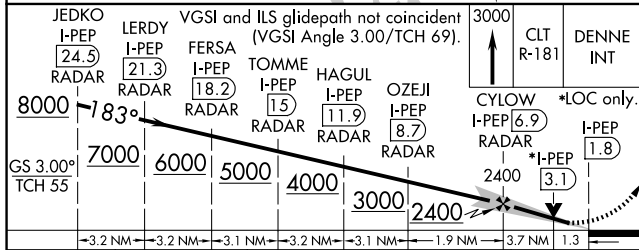

CATEGORY	A	B	C	D
S-ILS 18C **	942/24 200 (200- $\frac{1}{2}$)			
S-LOC 18C	1220/24 478 (500- $\frac{1}{2}$)		1220/50 478 (500-1)	
CIRCLING	1380-1 632 (700-1)		1500-2 $\frac{1}{4}$ 752 (800-2 $\frac{1}{4}$)	1500-2 $\frac{1}{2}$ 752 (800-2 $\frac{1}{2}$)

HIRL all Rwys					
REIL Rwys 18L and 23					
TDZ/CL Rwys 18R, 36L, 36C and 36R					
FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

CHARLOTTE, NORTH CAROLINA

Amdt 11 15AUG19

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)

ILS or LOC RWY 18C