

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

25051

APP CRS	Rwy Idg	10000
003°	TDZE	707
	Apt Elev	748




RNAV (RNP) Z RWY 36C

CHARLOTTE/DOUGLAS INTL (CLT)

RNP AR APCH - GPS.

Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -8°C or above 54°C. For inop ALS, increase RNP 0.30 visibility all Cnts to 1½ SM.	ALSF-2	MISSED APPROACH: Climb to 3000 on track 003° to TOMME and hold.
---	---------------	--

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON	CLNC DEL
ARR 121.15	(001°-119°) 128.32	(Rwys 18L-36R) 118.1 257.8	121.8 348.6 (WEST)	127.15
DEP 132.1	(120°-295°) 120.05	(Rwy 18C-36C) 126.4 257.8	121.9 348.6 (EAST)	348.6
	(296°-360°) 134.75	(Rwy 18R-36L) 133.35 257.8		
	(180°-359°) 257.2			
	(360°-179°) 307.8			

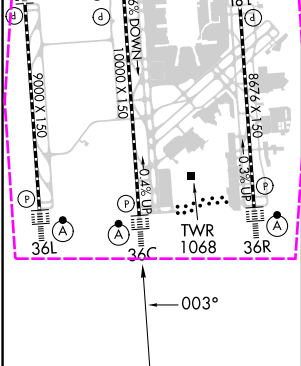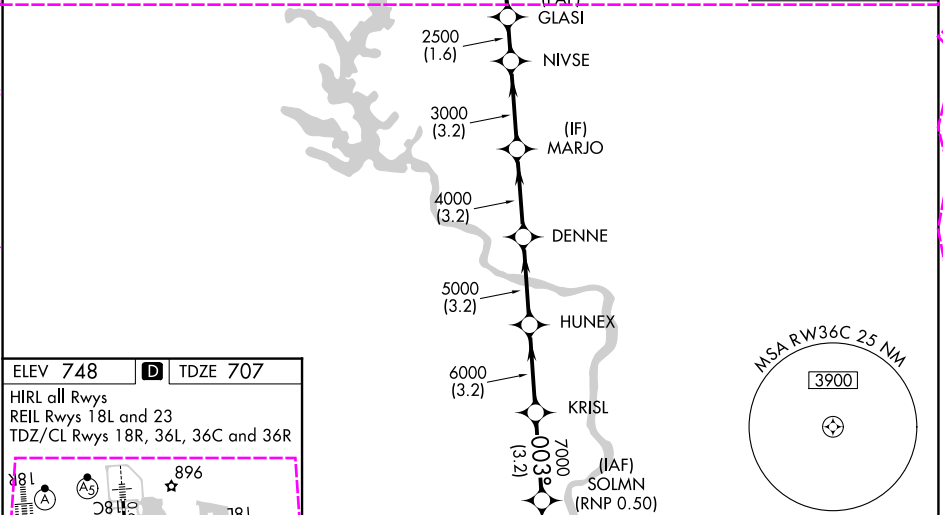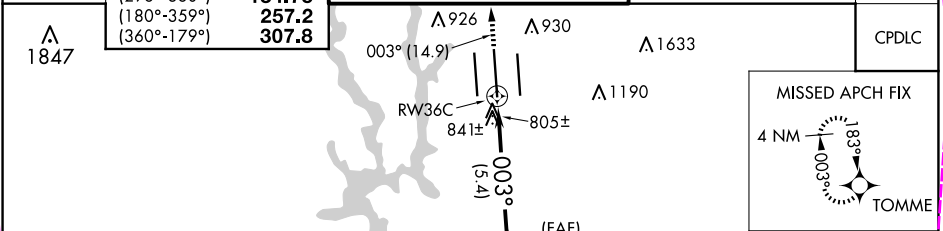

3000	tr 003°	TOMME	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).				SOLMN		
									
			GLASI	NIVSE	MARJO	DENNE	HUNEX	KRISL	SOLMN
			2500	3000	4000	5000	6000	7000	8000
			2500						
RW36C			5.4 NM	1.6 NM	3.2 NM	3.2 NM	3.2 NM	3.2 NM	3.2 NM
CATEGORY		A		B		C		D	
RNP 0.11 DA				1134/40	427 (400-¾)				
RNP 0.30 DA				1180/50	473 (500-1)				
AUTHORIZATION REQUIRED									

SE-2, 04 SEP 2025 to 02 OCT 2025

SE-2, 04 SEP 2025 to 02 OCT 2025

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

25275

APP CRS	Rwy Ldg	10000
003°	TDZE	707
	Apt Elev	748

RNAV (RNP) Z RWY 36C

CHARLOTTE/DOUGLAS INTL (CLT)


RNP AR APCH - GPS.

Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -8°C or above 54°C. For inop ALS, increase RNP 0.30 visibility all Cnts to 1½ SM.





MISSED APPROACH: Climb to 3000 on track 003° to TOMME and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1 257.8 (Rwys 18L-36R)	126.4 257.8 (Rwy 18C-36C)	121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	133.35 257.8 (Rwy 18R-36L)		121.9 348.6 (E)
	134.75 (296°-360°)				

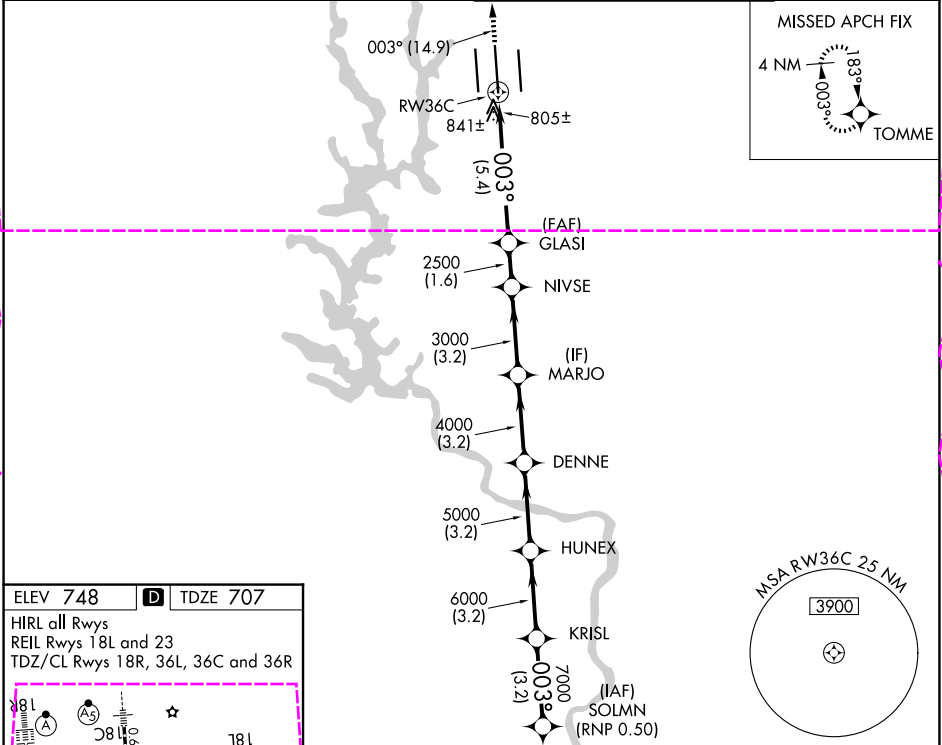

ELEV 748	D	TDZE 707
HIRL all Rwys		
REIL Rwys 18L and 23		
TDZ/CL Rwys 18R, 36L, 36C and 36R		



3000	tr 003°	TOMME	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).						SOLMN
			GLASI	NIVSE	MARJO	DENNE	HUNEX	KRISL	8000
			2500	3000	4000	5000	6000	7000	
			5.4 NM	1.6 NM	3.2 NM	3.2 NM	3.2 NM	3.2 NM	GP 3.05° TCH 57
CATEGORY	A		B		C		D		
RNP 0.11 DA			1134/40		427 (400-¾)				
RNP 0.30 DA			1180/50		473 (500-1)				

AUTHORIZATION REQUIRED

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025