

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

25051

WAAS CH 77500 W18A	APP CRS 183°	Rwy Idg TDZE 748 Apt Elev 748
--	------------------------	---

RNAV (GPS) Y RWY 18L


CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.


- ⚠** Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.
- ⚠** Rwy 18L helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C.

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct LOCAS and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON	CLNC DEL
ARR 121.15 DEP 132.1	CHARLOTTE APP CON (001°-119°) 128.32 (120°-295°) 120.05 (296°-360°) 134.75 (180°-359°) 257.2 (360°-179°) 307.8	CHARLOTTE TOWER (Rwys 18L-36R) 118.1 257.8 (Rwy 18C-36C) 126.4 257.8 (Rwy 18R-36L) 133.35 257.8	GND CON 121.8 348.6 (WEST) 121.9 348.6 (EAST)	CLNC DEL 127.15 348.6
				CPDLC

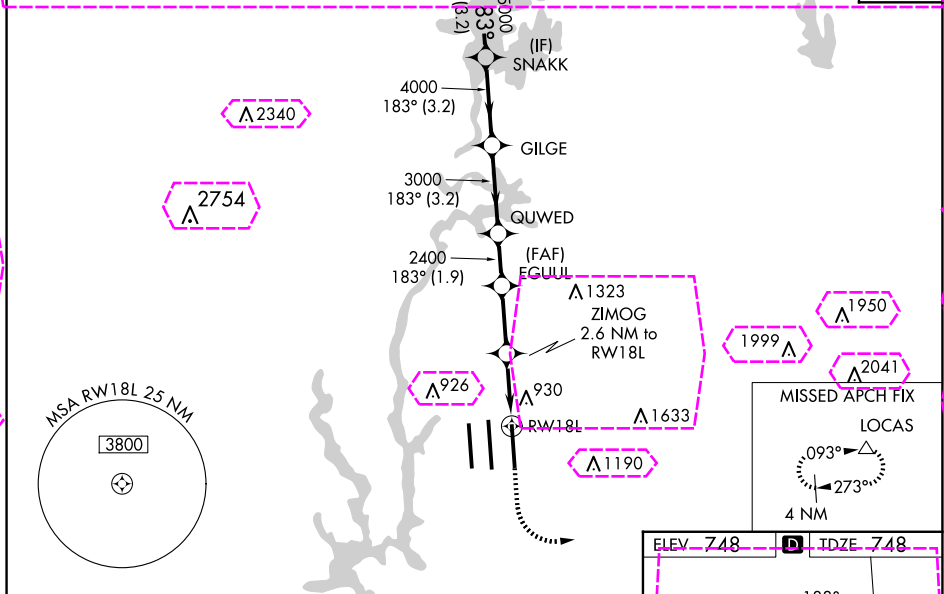

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).				
CAVVI SNACK GILGE QUWED EGUUL ZIMOG RW18L				
6000 5000 4000 3000 2400 2400 1620				
GP 3.00° TCH 56				
-3.2 NM -3.2 NM 3.2 NM 1.9 NM 2.4 NM 1.5 NM 1.1 NM				
CATEGORY	A	B	C	D
LPV DA	1002/40		254 (300-¾)	
LNAV/VNAV DA	1216-1⅜		468 (500-1⅝)	
LNAV MDA	1180/55		1180-1¼ 432 (500-1¼)	
CIRCLING	1380-1 632 (700-1)		1500-2¼ 752 (800-2¼) 1500-2½ 752 (800-2½)	

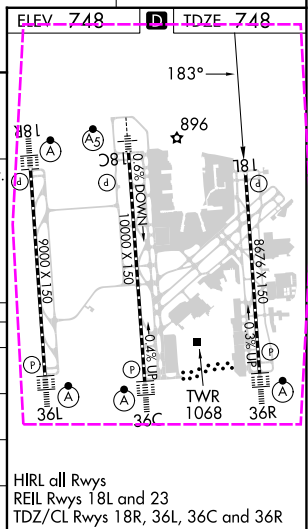

CHARLOTTE, NORTH CAROLINA
Amdt 5 15AUG19

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
RNAV (GPS) Y RWY 18L

25275

WAAS CH 77500 W18A	APP CRS 183°	Rwy Ldg 8676 TDZE 748 Apt Elev 748
--	------------------------	---




RNAV (GPS) Y RWY 18L
CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.

⚠ Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.
⚠ Rwy 18L helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems. LNAV/VNAV NA below -11°C or above 54°C.

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct LOCAS and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1	257.8 (Rwys 18L-36R)	121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4	257.8 (Rwy 18C-36C)	
	134.75 (296°-360°)		133.35	257.8 (Rwy 18R-36L)	121.9 348.6 (E)

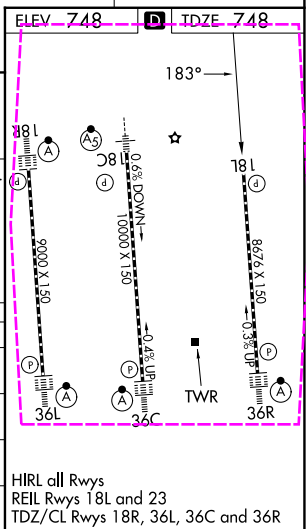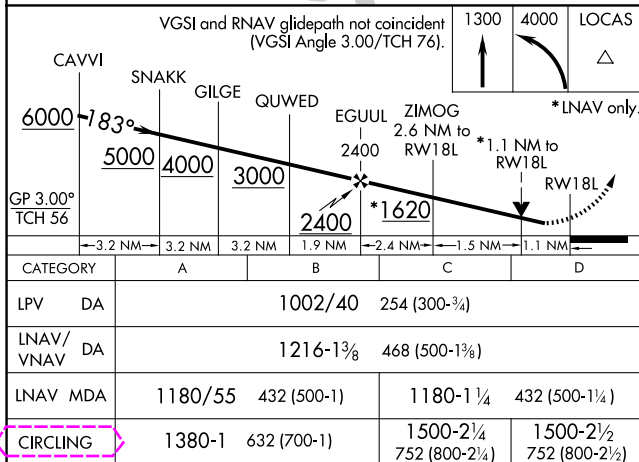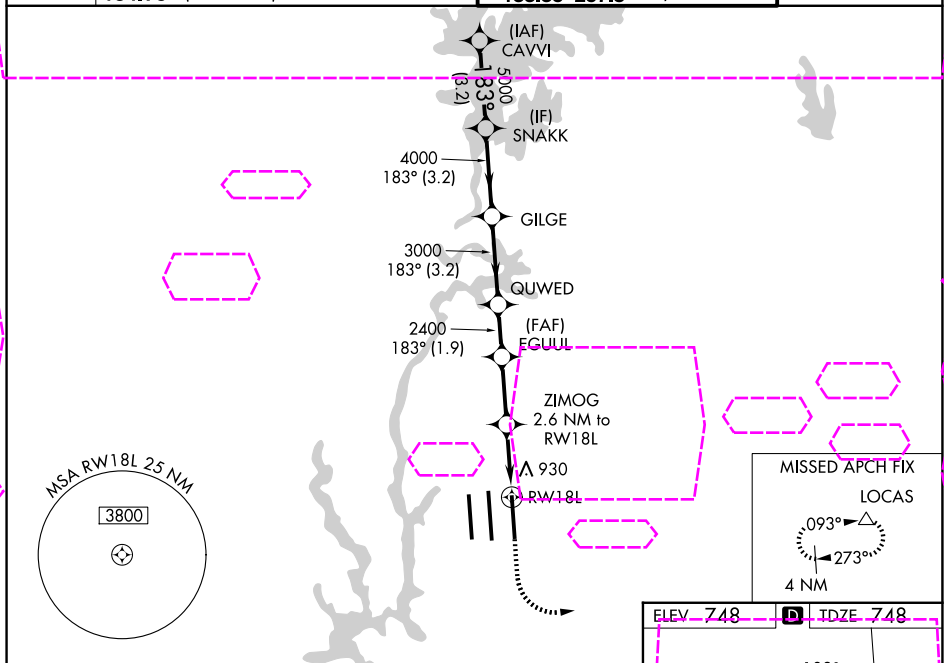

CHARLOTTE, NORTH CAROLINA
Amdt 5 15AUG19

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
RNAV (GPS) Y RWY 18L

SE-2, 02 OCT 2025 to 30 OCT 2025