

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

25051

WAAS CH 90100 W36D	APP CRS 003°	Rwy Idg 8390 TDZE 727 Apt Elev 748
--	------------------------	---

RNAV (GPS) Y RWY 36R

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.



⚠

Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALSF, increase LNAV/VNAV all Cats visibility to 1½ mile

ALSF-2

MISSED APPROACH: Climb to 1320 then climbing right turn to 4000 direct LOCAS and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON	CLNC DEL
ARR 121.15 DEP 132.1	(001°-119°) 128.32 (120°-295°) 120.05 (296°-360°) 134.75 (180°-359°) 257.2 (360°-179°) 307.8	(Rwys 18L-36R) 118.1 257.8 (Rwy 18C-36C) 126.4 257.8 (Rwy 18R-36L) 133.35 257.8	121.8 348.6 (WEST) 121.9 348.6 (EAST)	127.15 348.6

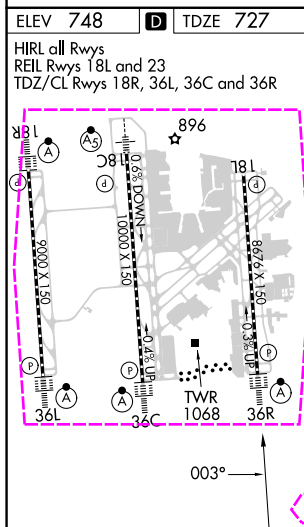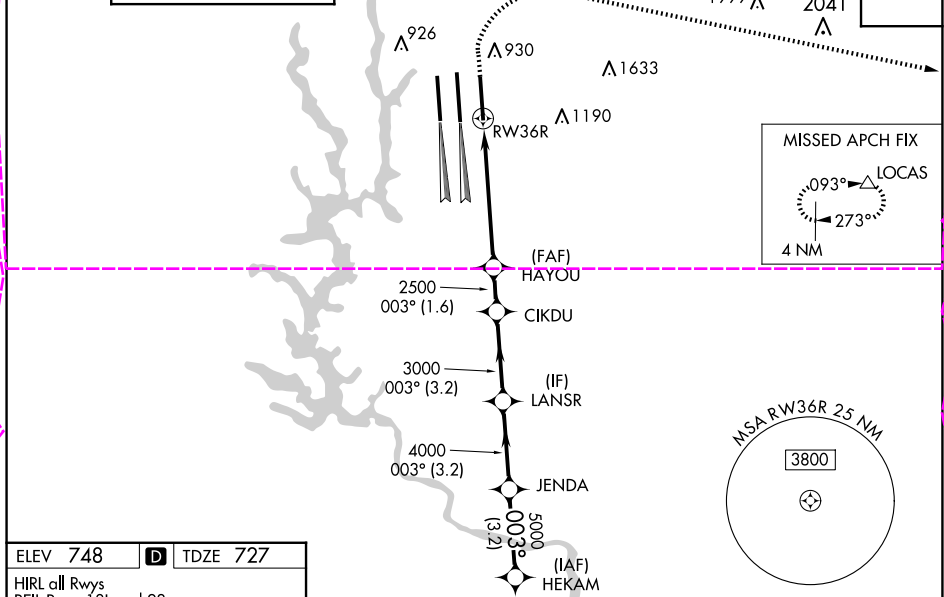

1320	4000	LOCAS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).	HEKAM
*LNAV only.				
*1.6 NM to RW36R				
RW36R				
HAYOU 2500				
CIKDU 3000				
LANSR 4000				
JENDA 5000				
HEKAM 6000				
GP 3.00° TCH 55				
CATEGORY	A	B	C	D
LPV DA	927/18 200 (200-½)			
LNAV/VNAV DA	1229-1¼ 502 (500-1¼)			
LNAV MDA	1320/24 593 (600-½)	1320-1¼ 593 (600-1¼)		
CIRCLING	1380-1 632 (700-1)	1500-2¼ 752 (800-2¼) 1500-2½ 752 (800-2½)		

CHARLOTTE, NORTH CAROLINA
Amdt 4C 15AUG19

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
RNAV (GPS) Y RWY 36R

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

25275

WAAS CH 90100 W36D	APP CRS 003°	Rwy Ldg TDZE 727 Apt Elev 748
--	------------------------	---

RNAV (GPS) Y RWY 36R

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.

⚠


Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALSF, increase LNAV/VNAV all Cats visibility to 1½ mile

ALSF-2

MISSED APPROACH:

Climb to 1320 then climbing right turn to 4000 direct LOCAS and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1 257.8 (Rwys 18L-36R)		121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4 257.8 (Rwy 18C-36C)		121.9 348.6 (E)
	134.75 (296°-360°)		133.35 257.8 (Rwy 18R-36L)		

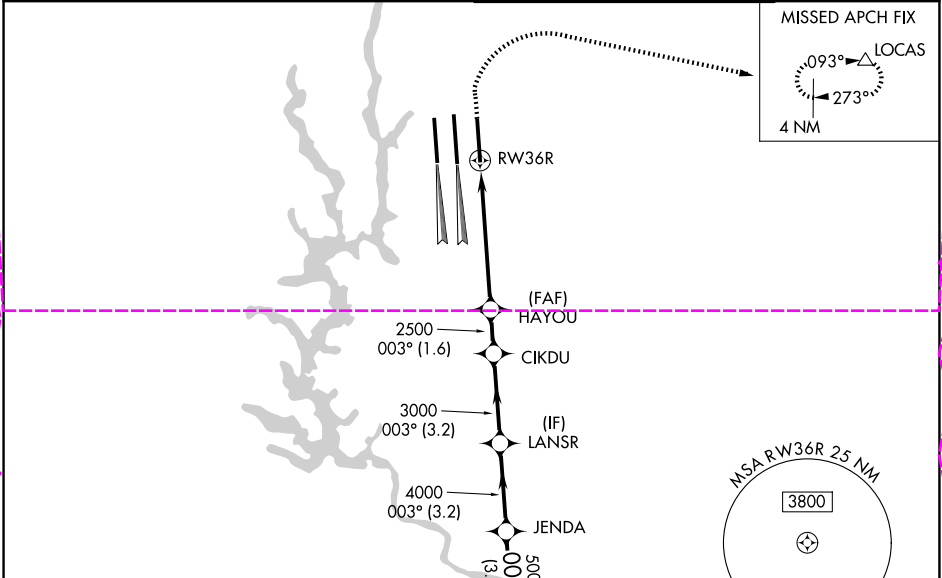

ELEV 748 **D** TDZE 727

HIRL all Rwys
REIL Rwys 18L and 23
TDZ/CL Rwys 18R, 36L, 36C and 36R

1320		4000		LOCAS		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 74).		HEKAM	
1320		4000		LOCAS		JENDA		HEKAM	
*LNAV only.		*1.6 NM to RWY 36R		HAYOU		CIKDU		LANSR	
RWY 36R		2500		3000		4000		5000	
1.6		3.8 NM		1.6 NM		3.2 NM		3.2 NM	
CATEGORY		A		B		C		D	
LPV DA		927/18		200 (200-½)					
LNAV/VNAV DA		1229-1¼		502 (500-1¼)					
LNAV MDA		1320/24		593 (600-½)		1320-1¼		593 (600-1¼)	
CIRCLING		1380-1		632 (700-1)		1500-2¼		1500-2½	
						752 (800-2¼)		752 (800-2½)	