

WAAS CH 65605 W02A	APP CRS 022°	Rwy Ldg TDZE 683 Apt Elev 683
--	------------------------	---

RNAV (GPS) RWY 2

LOVELL FLD (CHA)

RNP APCH - GPS.


⚠ Circling Rwy 15, 33 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA.

MALS



MISSED APPROACH:
Climb to 3900 direct HETIP and hold, continue climb-in-hold to 3900.

ATIS 119.85	CHATTANOOGA APP CON ★ 125.1 379.1	CHATTANOOGA TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.7 348.6	CLNC DEL 120.95 348.6	UNICOM 122.95
-----------------------	---	--	-------------------------------	---------------------------------	-------------------------

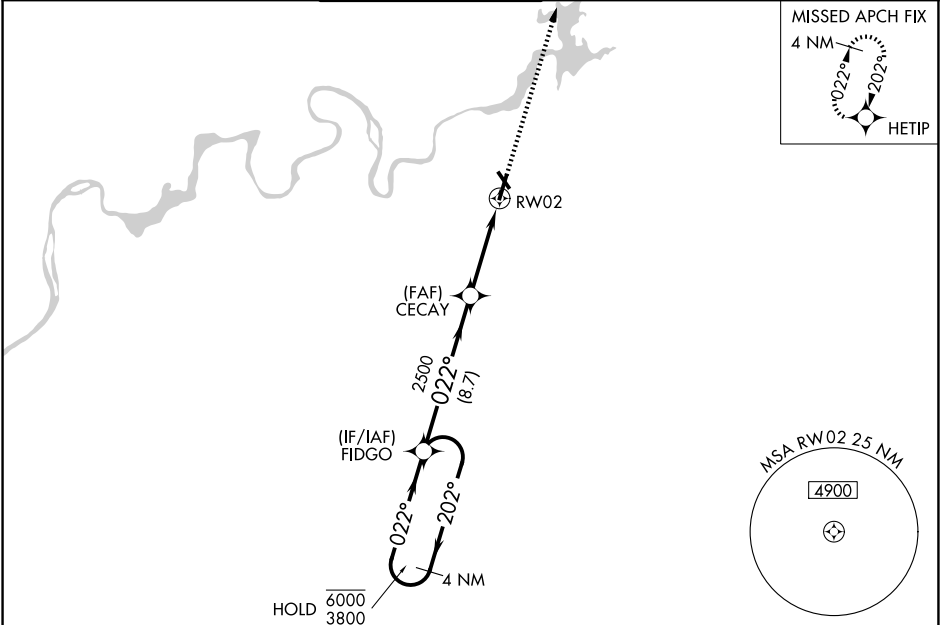

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 71').		3900	HETIP
6000 ← 202° 3800 → 022°		FIDGO		CECAV	2500
GP 3.00° TCH 51		2500		1.5 NM to RWY 02	RWY 02
		8.7 NM		3.9 NM	1.5 NM
CATEGORY	A	B	C	D	
LPV DA**		883/24	200 (200-½)		
LNAV/VNAV DA		1197/55	514 (600-1)		
LNAV MDA	1240/24	557 (600-½)	1240/60	557 (600-1¼)	
CIRCLING	1300-1 617 (700-1)	1340-1 657 (700-1)	1500-2½ 817 (900-2½)	1580-3 897 (900-3)	

ELEV 683 **D** TDZE 683

MIRL Rwy 15-33
HIRL Rwy 2-20 **0**
TDZ/CL Rwy 20 **0**