


WAAS CH 90210 W23B	APP CRS 231°	Rwy Ldg TDZE 965 Apt Elev 986
--	------------------------	---

RNAV (GPS) RWY 23L

MC GHEE TYSON(T'YS)

RNP APCH - GPS.		MISSED APPROACH: Climb to 1600 then climb to 3000 direct GROSS and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10° C or above 54° C.			
ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	CLNC DEL 121.65
GND CON 121.9 348.6			

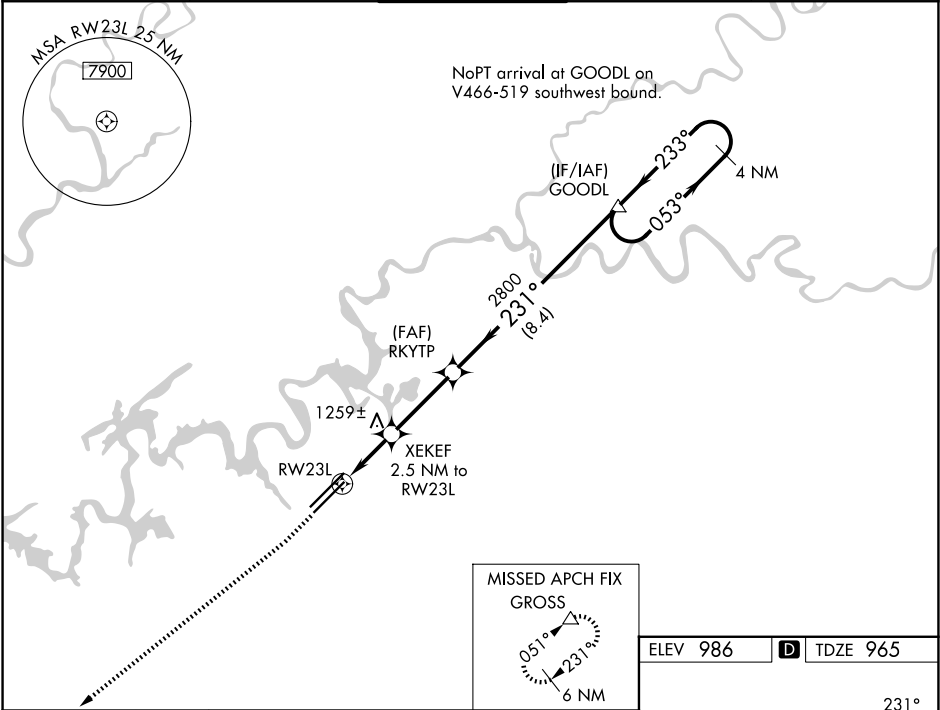

1600	3000	GROSS				
↑	↑	△				
RW23L		XEKEF 2.5 NM to RW23L	RKYTP	GOODL	4 NM Holding Pattern	
1.6 NM to RW23L		1800	2800	051°	231°	3500
1.6 NM		0.9 NM	3.1 NM	8.4 NM	GP 3.00° TCH 52	
CATEGORY	A	B	C	D		
LPV DA	1165/40		200 (200-¾)			
LNAV/VNAV DA	1383-1⅜		418 (500-1⅝)			
LNAV MDA	1520/55	555 (600-1)	1520-1⅝	555 (600-1⅝)		
CIRCLING	1520-1 534 (600-1)	1620-1 634 (700-1)	1660-2 674 (700-2)	1900-3 914 (1000-3)		

