

LOC I-TRI 109.9	APP CRS 230°	Rwy Idg 8000
	TDZE 1518	
	Apt Elev 1519	

ILS or LOC RWY 23

TRI-CITIES (TRI)

ADF or RADAR required.

⚠

Circling to Rwy 9 NA at night. Circling NA northwest of Rwy 9 and 23. CAUTION: Air traffic control tower 1634 feet MSL located 940 feet right of runway centerline 357 feet from runway threshold. When control tower closed: S-ILS 23 increase visibilities to RVR 4000 all Cats and S-LOC 23 increase visibilities ½ SM all Cats.


ALSIF-2

ⓘ

ⓘ

MISSED APPROACH: Climb to 3800 direct BOOIE LOM/ RADAR and hold.

ATIS 118.25	TRI-CITY APP CON ★ 134.425 349.0	TRI-CITY TOWER ★ 119.5 (CTAF) 257.8	GND CON 121.7 348.6	UNICOM 122.95
-----------------------	--	---	-------------------------------	-------------------------

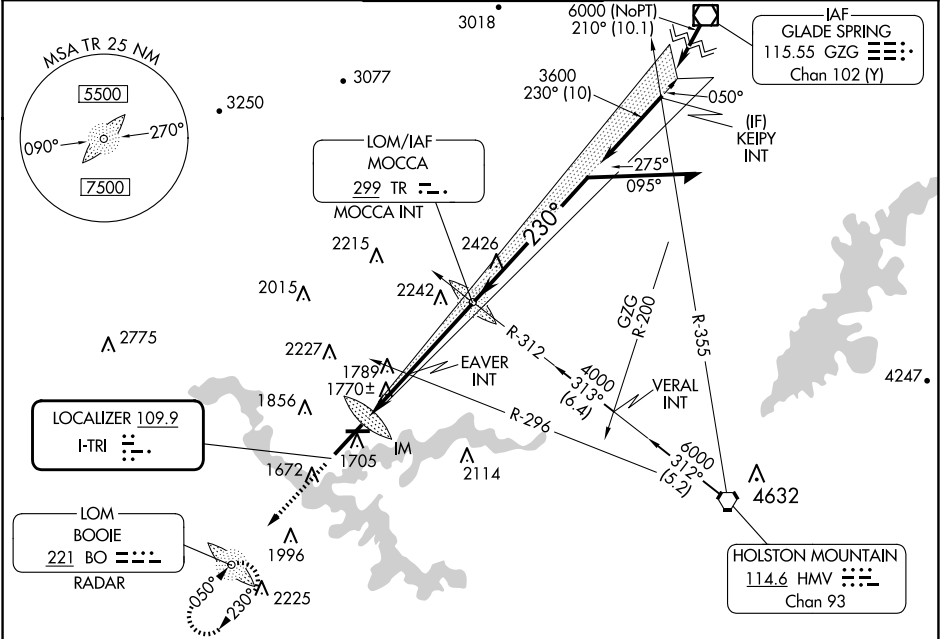

ELEV 1519	D	TDZE 1518	3800	BO
230° 1618 4443 X 150 TWR 1634 8000 X 150 REIL Rwy 5 and 27 TDZ/CL Rwy 23 HIRL Rwy 5-23 MIRL Rwy 9-27 FAF to MAP 6 NM Knots 60 90 120 150 180 Min:Sec 6:00 4:00 3:00 2:24 2:00 *LOC only. 3509 EAVR INT IM 2500 3600 4000 GS 3.00° TCH 56 0.1 2.4 NM 3.5 NM				
CATEGORY	A	B	C	D
S-ILS 23	1718/18 200 (200-½)			
S-LOC 23	2500/40 982 (1000-¾)	2500-1 982 (1000-1)	2500-2½	982 (1000-2½)
C CIRCLING	2500-1¼ 981 (1000-1¼)	2500-1½ 981 (1000-1½)	2500-3 981 (1000-3)	
EAVR FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 23	2020/24 502 (600-½)		2020/55 502 (600-1)	
C CIRCLING	2120-1 601 (700-1)	2180-1 661 (700-1)	2320-2¼ 801 (900-2¼)	2500-3 981 (1000-3)