

APP CRS	Rwy Ldg	6995
024°	TDZE	55
	Apt Elev	55

RNAV (RNP) Z RWY 2

RNP AR APCH - GPS.

T For uncompensated Baro-VNAV systems, procedure NA below 14°C or above 54° C. When local altimeter setting not received, procedure NA. For inop ALS, increase RNP 0.30 all Cats visibility to $\frac{7}{8}$ SM.

MALSR





MISSED APPROACH: Climb to 3000
direct KRANE and hold.

ATIS
128.6



HCF APPROACH
120.2 322.4 (N)
119.5 225.4 (S)

MAUI TOWER ★
118.7 (CTAF) **L** 279.6

GND CON
121.9 279.6

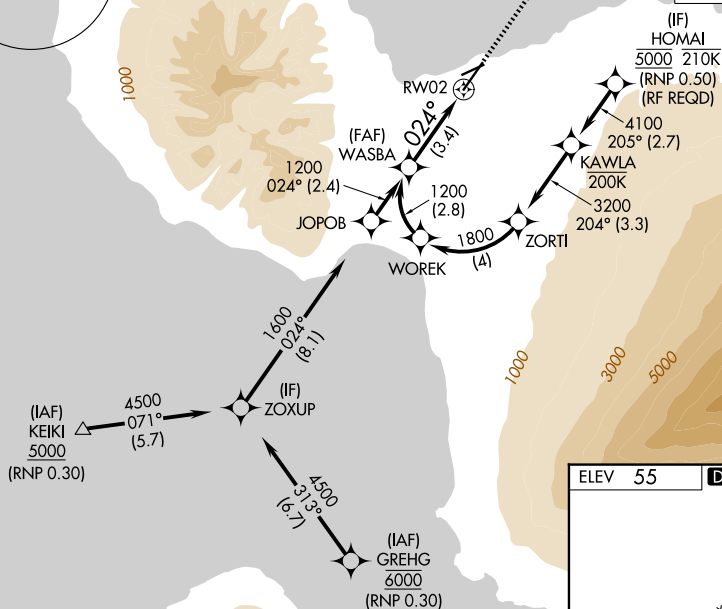UNICOM
122.95

ELEV 55	D	TDZE 55
---------	----------	---------

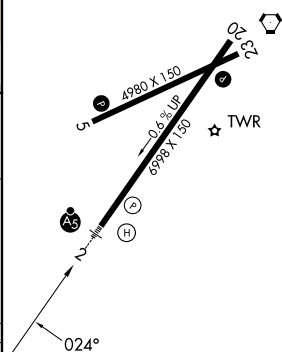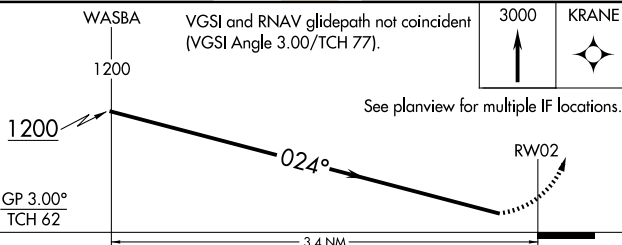

CATEGORY	A	B	C	D
RNP 0.30 DA	394-1/2 339 (400-1/2)			

AUTHORIZATION REQUIRED

HIRL Rwy 2-20 **L**MIRL Rwy 5-23

KAHULUI, HAWAII

Amdt 1B 15JUN23

20°54'N-156°26'W

KAHULUI (OGG)(PHOG)

RNAV (RNP) Z RWY 2