

LOC/DME I-AVL	APP CRS	Rwy Ldg TDZE	8002
110.5	347°	2141	2164
Chan 42		Apt Elev	2164

ILS or LOC RWY 35

ASHEVILLE RGNL (AVL)

▼


▲

Circling NA west of Rwy 17-35.

MALSR

MISSED APPROACH: Climb to 2700 then climbing right turn to 6800 on heading 020° and on SUG VORTAC R-313 to JUNOE INT/SUG 24.5 DME and hold, continue climb-in-hold to 6800.
* Missed approach requires minimum climb of 340 feet per NM to 4200.

ATIS	ASHEVILLE APP CON ★	ASHEVILLE TOWER ★	GND CON	UNICOM
120.2	124.65 351.8	121.1 (CTAF) 0 257.8	121.9	122.95

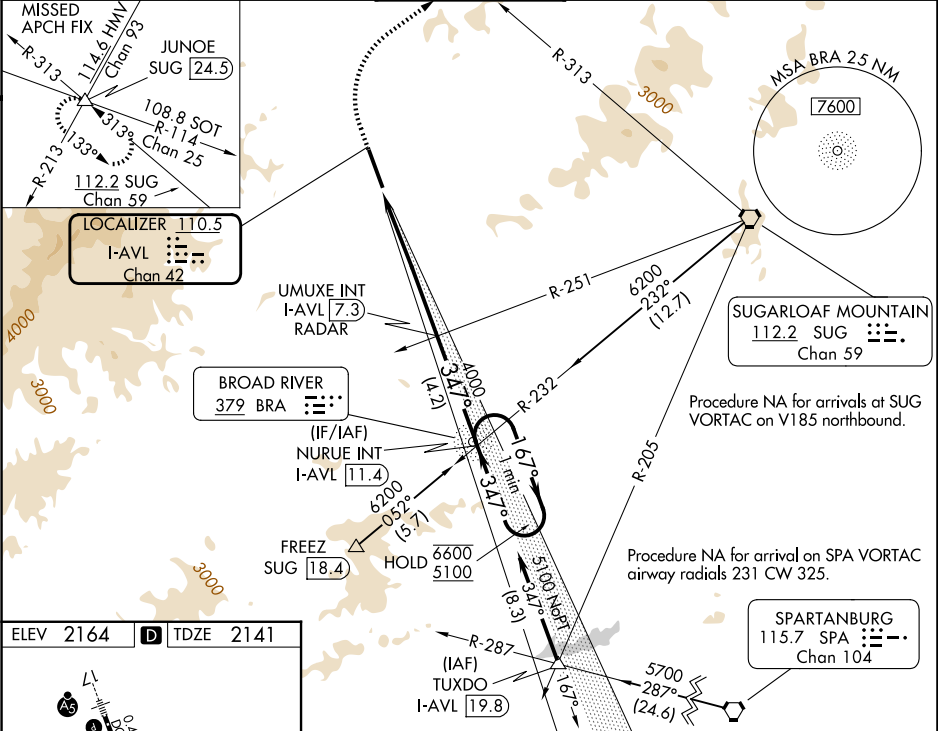

ELEV 2164

D

TDZE 2141

TDZ/CL Rwy 35

HIRL Rwys 17-35

REIL Rwys 17 and 35

FAF to MAP 5.7 NM

Knots 60 90 120 150 180

Min:Sec 5:42 3:48 2:51 2:17 1:54

2700	6800	SUG R-313	JUNOE	UMUXE INT I-AVL 7.3	NURUE INT I-AVL 11.4	One Minute Holding Pattern
3.2 NM	2.5 NM	4.2 NM				
CATEGORY	A	B	C	D		
S-ILS 35*	2360/24		219 (200-1/2)			
S-ILS 35	3019-4		878 (900-4)			
S-LOC 35	3200/40 1059 (1100-3/4)	3200/55 1059 (1100-1)	3200-2 1/2	1059 (1100-2 1/2)		
CIRCLING	3200-1 1/4 1036 (1100-1 1/4)	3200-1 1/2 1036 (1100-1 1/2)	3460-3 1296 (1300-3)	3720-3 1556 (1600-3)		