


WAAS CH 93641 W17A	APP CRS 167°	Rwy Ldg TDZE Apt Elev	8002 2164 2164
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17


ASHEVILLE RGNL (AVL)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 6200 direct AVEBE and hold, continue climb-in-hold to 6200.
Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 2 1/2 SM and increase LNAV Cats C/D visibility to 2 SM.		

ATIS 120.2	ASHEVILLE APP CON* 124.65 351.8	ASHEVILLE TOWER* 121.1 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

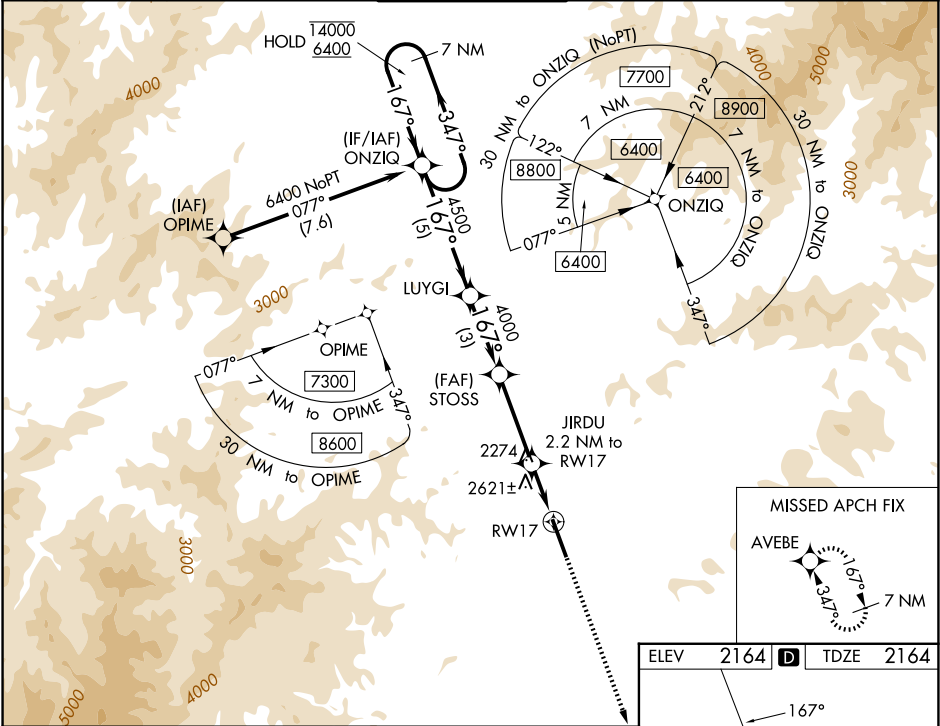

7 NM Holding Pattern		ONZIQ	LUYGI	STOSS	JIRDU	AVEBE
14000 ← 347°		167° →	4500	4000	2.2 NM to RW17	*LNAV only.
GP 3.00°						
TCH 55						
		5 NM	3 NM	3.4 NM	2.2 NM	
CATEGORY	A	B	C	D		
LPV DA	2364-1/2		200 (200-1/2)			
LNAV/VNAV DA	2960-13/4		796 (800-13/4)			
LNAV MDA	2880-1/2	716 (800-1/2)	2880-15/8	716 (800-15/8)		
CIRCLING	2880-1	716 (800-1)	3460-3	3720-3		
			1296 (1300-3)	1556 (1600-3)		

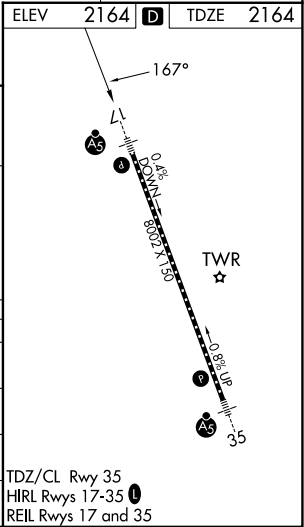

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025