

WAAS CH 48941 W35A	APP CRS 347°	Rwy Ldg TDZE 2141 Apt Elev 2164
--	------------------------	---

RNAV (GPS) RWY 35

ASHEVILLE RGNL (AVL)

RNP APCH.

T


A

Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.


MALSR

MISSED APPROACH: Climb to 6800 direct ONZIQ and hold, continue climb-in-hold to 6800.

ATIS 120.2	ASHEVILLE APP CON★ 124.65 351.8	ASHEVILLE TOWER★ 121.1(CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

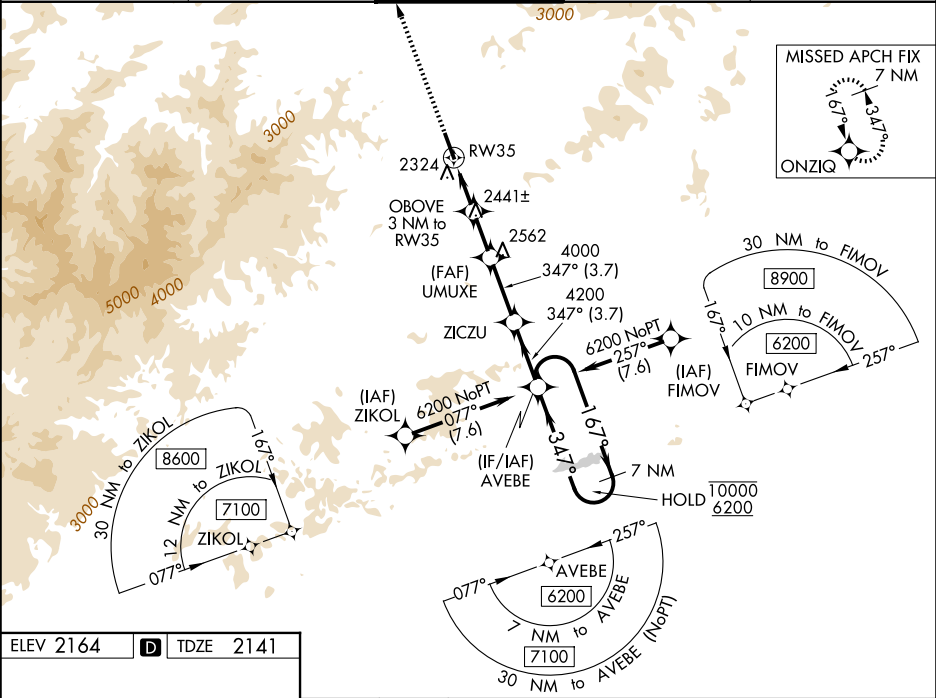

ELEV 2164	D	TDZE 2141
-----------	----------	-----------

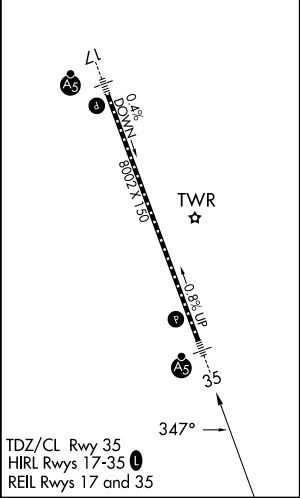

6800 ONZIQ				
7 NM Holding Pattern				
RW35 1.5 NM to RW35 1.5 NM to RW35 2.7 NM to RW35 3.7 NM to RW35				
CATEGORY	A	B	C	D
LPV DA	2342/40		201 (200-¾)	
LNAV/VNAV DA	2577/40		436 (500-¾)	
LNAV MDA	2660/40	519 (500-¾)	2660/55 519 (500-1)	2660/50 519 (500-1)
CIRCLING	2800-1 636 (700-1)	2880-1 716 (800-1)	3460-3 1296 (1300-3)	3720-3 1556 (1600-3)