
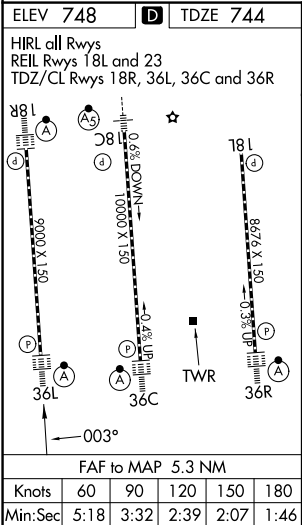


LOC/DME I-XUU 110.15 Chan 38(Y)	APP CRS 003°	Rwy Ldg TDZE Apt Elev	9000 744 748
---	------------------------	-----------------------------	---

ILS or LOC RWY 36L

CHARLOTTE/DOUGLAS INTL (CLT)

⚠ Circling NA at night. Simultaneous approach authorized. ⚠ DME or RADAR required.		ALSF-2 	MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on CLT VOR/DME R-310 to BUDKE/CLT 16 DME and hold.
D-ATIS 121.15	CHARLOTTE APP CON 128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	CHARLOTTE TOWER 118.1 (Rwys 18L-36R) 126.4 257.8 (Rwy 18C-36C) 133.35 257.8 (Rwy 18R-36L)	GND CON 121.8 348.6 (W) 121.9 348.6 (E)

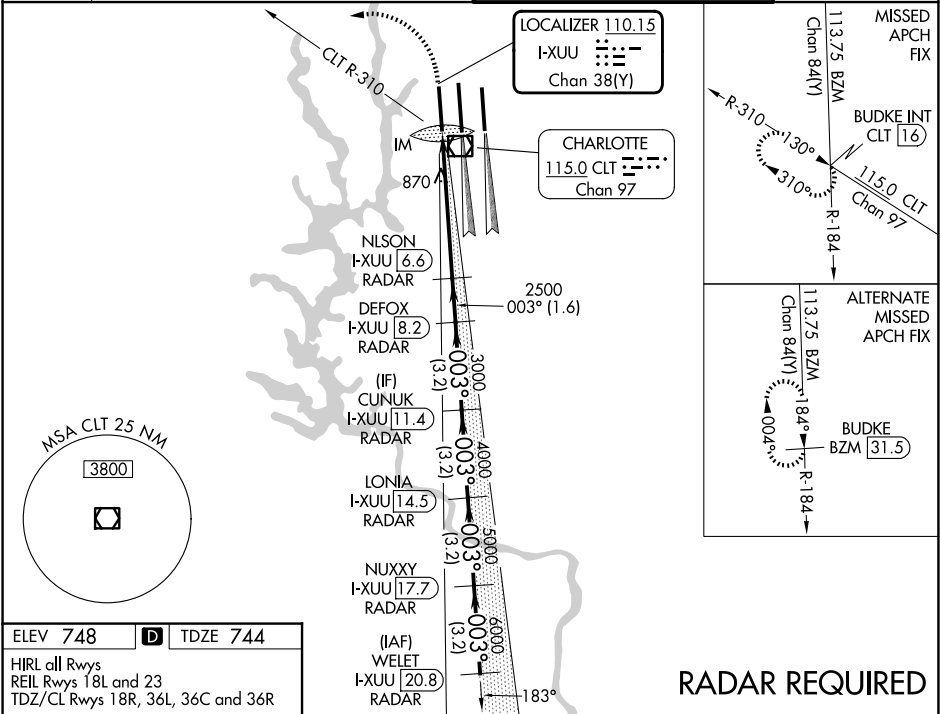

RADAR REQUIRED

1200	4000	CLT R-310	BUDKE INT	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).	WELET I-XUU [20.8] RADAR
*LOC only.					
I-XUU [1.3]	I-XUU [2.5]	NLSN I-XUU [6.6] RADAR	DEFOX I-XUU [8.2] RADAR	CUNUK I-XUU [11.4] RADAR	LONIA I-XUU [14.5] RADAR
IM	2500	3000	4000	5000	6000
0.1 NM	1.1 NM	4.1 NM	1.6 NM	3.2 NM	3.2 NM
CATEGORY A					
S-ILS 36L 944/18 200 (200-½)					
S-LOC 36L 1180/24 436 (500-½) 1180/40 436 (500-¾)					
CIRCLING 1380-1 632 (700-1) 1500-2¼ 752 (800-2¼) 1500-2½ 752 (800-2½)					