

WAAS CH 81800 W18B	APP CRS 183°	Rwy Ldg 10000 TDZE 742 Apt Elev 748
--	------------------------	--

RNAV (GPS) Y RWY 18C

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.

T


A

Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:
Climb to 3000 direct DENNE and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1 (Rwys 18L-36R)	257.8 (Rwy 18C-36C)	121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4 (Rwy 18C-36C)	257.8 (Rwy 18R-36L)	121.9 348.6 (E)
	134.75 (296°-360°)		133.35	257.8	

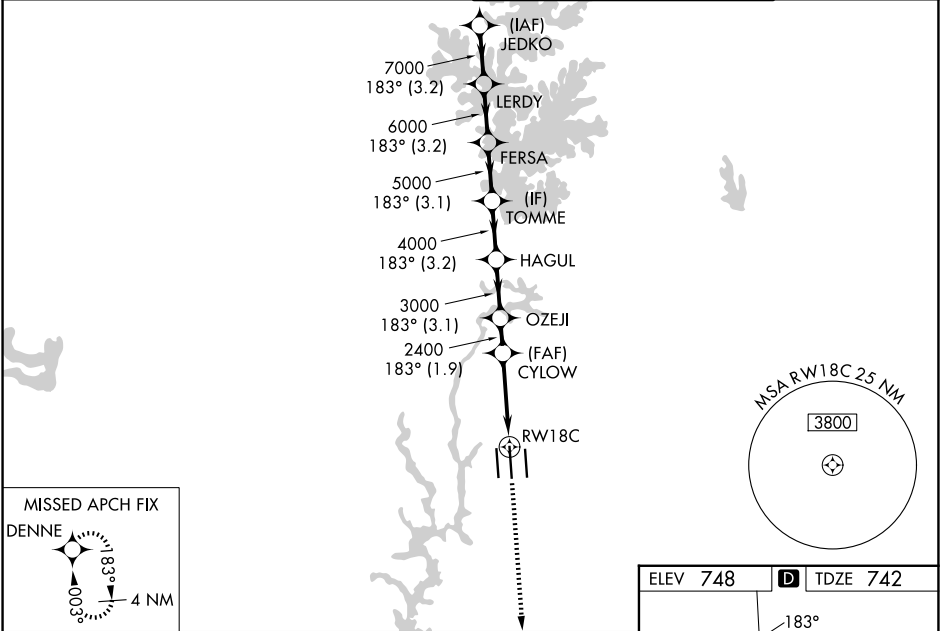

JEDKO LERDY FERSA TOMME HAGUL OZEJI CYLOW					
8000 7000 6000 5000 4000 3000 2400					
GP 3.00° TCH 55					
-3.2 NM 3.2 NM 3.1 NM 3.2 NM 3.1 NM 1.9 NM 3.8 NM 1.2 NM					
CATEGORY	A		B		D
LPV DA **	942/24		200 (200-½)		
LNAV/VNAV DA	1070/26		328 (400-½)		
LNAV MDA	1200/24 458 (500-½)		1200/45 458 (500-¾)		
CIRCLING	1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)		1500-2½ 752 (800-2½)

