


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>93641</b><br><b>W17A</b> | APP CRS<br><b>167°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>8002</b><br><b>2164</b><br><b>2164</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 17

ASHEVILLE RGNL (AVL)

|                                                                                                                                                                                                                             |       |                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------------------------------------------------------------------------------|
| RNP APCH.                                                                                                                                                                                                                   | MALSR | MISSED APPROACH: Climb to 6200 direct AVEBE and hold, continue climb-in-hold to 6200. |
| Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 2 1/2 SM and increase LNAV Cats C/D visibility to 2 SM. |       |                                                                                       |

|                      |                                           |                                                      |                         |                         |
|----------------------|-------------------------------------------|------------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>120.2</b> | ASHEVILLE APP CON*<br><b>124.65 351.8</b> | ASHEVILLE TOWER*<br><b>121.1</b> (CTAF) <b>257.8</b> | GND CON<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|----------------------|-------------------------------------------|------------------------------------------------------|-------------------------|-------------------------|

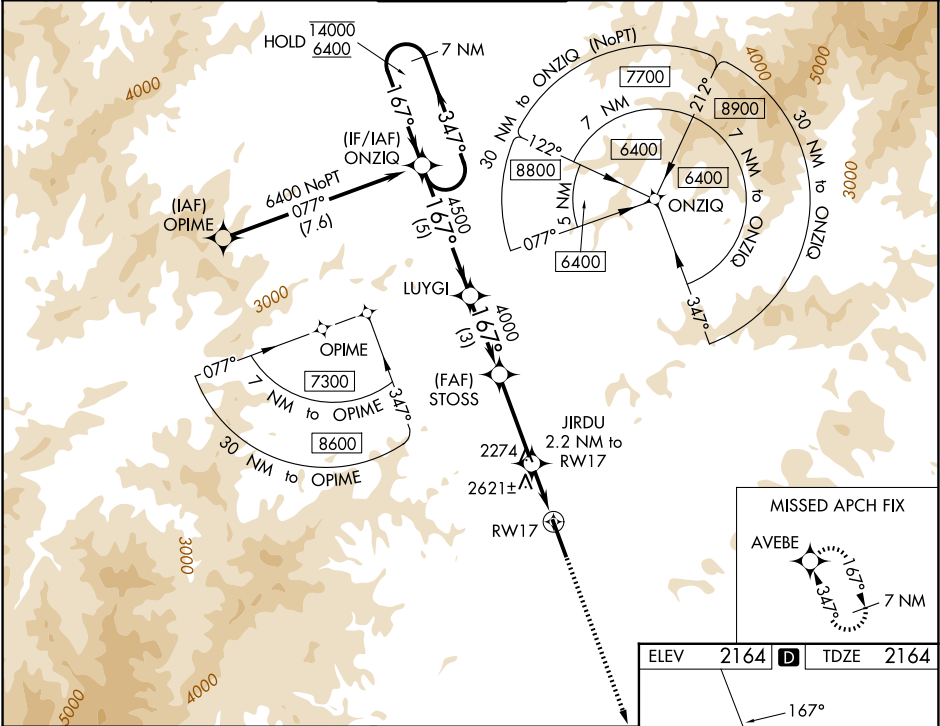

|                      |          |               |                 |                 |        |       |
|----------------------|----------|---------------|-----------------|-----------------|--------|-------|
| 7 NM Holding Pattern |          | ONZIQ         | LUYGI           | STOSS           | JIRDU  | AVEBE |
| 14000 ← 347°         |          | 167° → 6400   | 4500            | 4000            | 2920   | 6200  |
| GP 3.00°             |          |               |                 |                 |        |       |
| TCH 55               |          |               |                 |                 |        |       |
|                      |          | 5 NM          | 3 NM            | 3.4 NM          | 2.2 NM |       |
| CATEGORY             | A        | B             | C               | D               |        |       |
| LPV DA               |          | 2364-1/2      | 200 (200-1/2)   |                 |        |       |
| LNAV/VNAV DA         |          | 2960-1 3/4    | 796 (800-1 3/4) |                 |        |       |
| LNAV MDA             | 2880-1/2 | 716 (800-1/2) | 2880-1 5/8      | 716 (800-1 5/8) |        |       |
| CIRCLING             | 2880-1   | 716 (800-1)   | 3460-3          | 3720-3          |        |       |
|                      |          |               | 1296 (1300-3)   | 1556 (1600-3)   |        |       |

