


WAAS CH 61299 W28A	APP CRS 275°	Rwy Ldg 9000 TDZE 998 Apt Elev 1026
--	------------------------	--

RNAV (GPS) Y RWY 28

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 27R, or Rwy 26R and 27R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.										ALSIF-2		MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.			
D-ATIS		ATLANTA		ATLANTA TOWER						GND CON					
ARR 119.65		APP CON		8L-26R		8R-26L		9L-27R		9R-27L		10-28		RWYS	
DEP 125.55		127.9 379.9		119.1		125.325		123.85		119.3		119.5		254.4	
												(8L-26R,8R-26L)		(9L-27R,9R-27L)	
														121.9	
														121.75	
														121.65	
														254.4	
														10-28	
														RWYS	

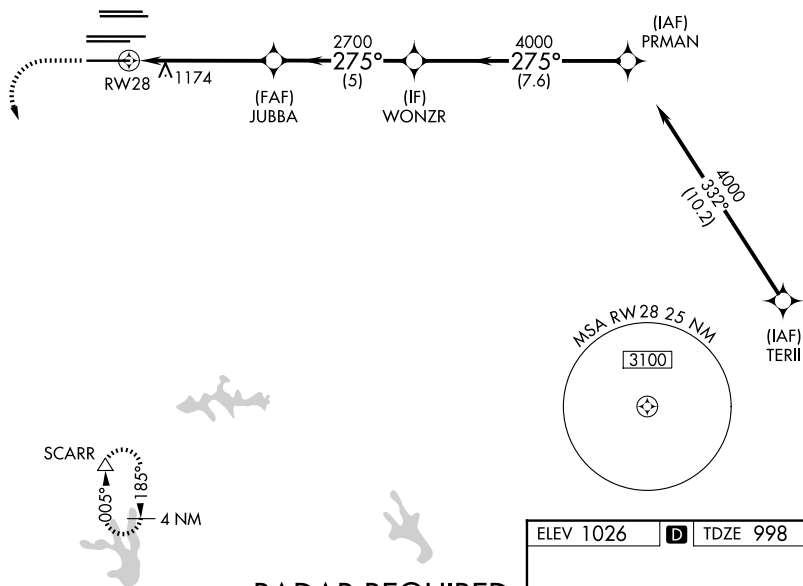

1500 ↑	3000 ↘	SCARR △				
CATEGORY			A	B	C	D
LPV	DA	1198/18		200 (200-½)		
LNAV/ VNAV	DA	1250/24		252 (300-½)		
LNAV	MDA	1440/24	442 (500-½)	1440/45	442 (500-¾)	