
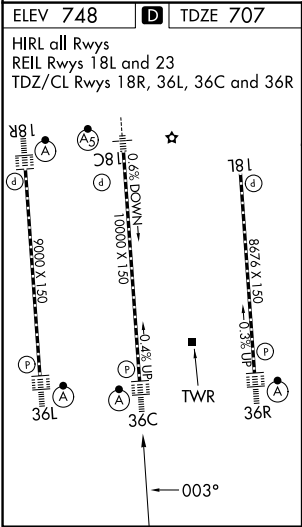


WAAS CH 86200 W36B	APP CRS 003°	Rwy Ldg 10000 TDZE 707 Apt Elev 748
--	------------------------	--

RNAV (GPS) Y RWY 36C
CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.	ALSF-2 	MISSED APPROACH: Climb to 3000 direct TOMME and hold.
Circling NA at night. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. LNAV procedure NA during simultaneous operations.		

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	118.1 257.8 (Rwys 18L-36R) 126.4 257.8 (Rwy 18C-36C) 133.35 257.8 (Rwy 18R-36L)	121.8 348.6 (W) 121.9 348.6 (E)

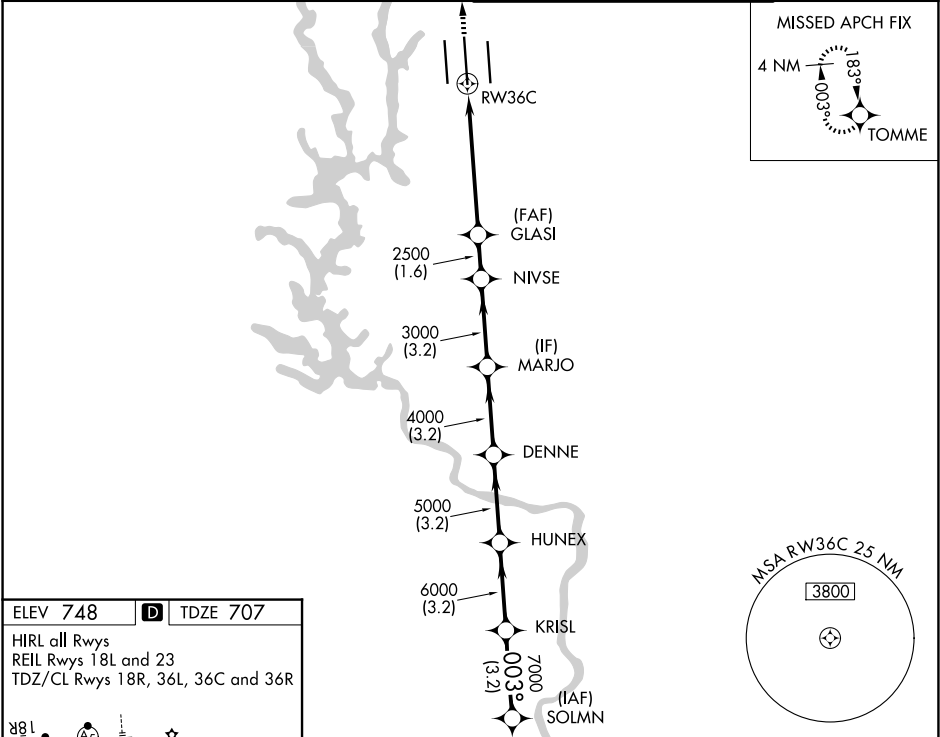

3000	TOMME	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).									
*LNAV only. *1.7 NM to RW36C		GP 3.00° TCH 57									
CATEGORY		A		B		C		D			
LPV	DA	907/18		200 (200-½)							
LNAV/ VNAV	DA	1229-1⅓		522 (500-1⅓)							
LNAV	MDA	1320/40 613 (600-¾)		1320-1⅓ 613 (600-1⅓)							
CIRCLING		1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)		1500-2½ 752 (800-2½)					