

GREENVILLE, SOUTH CAROLINA

AL-180 (FAA)

25051


WAAS CH 53413 W01A	APP CRS 006°	Rwy Idg TDZE 1015 Apt Elev 1048
--	------------------------	---

RNAV (GPS) RWY 1


GREENVILLE DOWNTOWN (GMU)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Greer altimeter setting. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cat D and Circling Cat C visibility ¼ mile. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cat C.	MALSF	MISSED APPROACH: Climb to 3400 direct GEBLL and via track 060° to PELAM and hold.
---	-----------------------------	---

ATIS 127.075	GREER APP CON ★ 118.8 270.275	GREENVILLE TOWER ★ 119.9 (CTAF) 0 257.7	GND CON 121.25	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

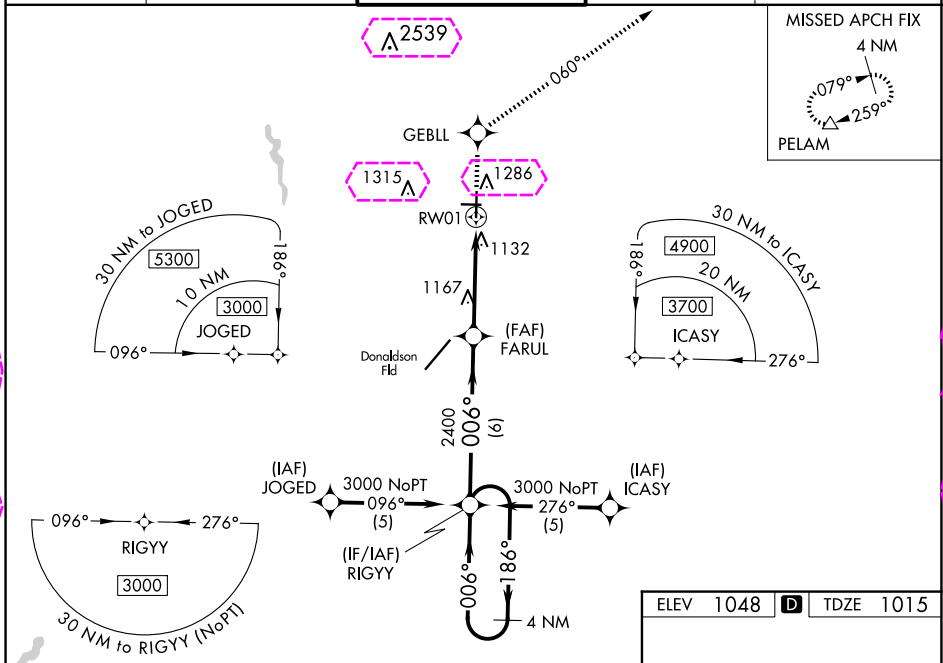

4 NM Holding Pattern		RIGYY		3400 ↑		GEBLL ✦		tr 060°		PELAM △	
3000 ← 186° 006° →				FARUL						*RNAV only.	
GP 3.00° TCH 36				2400		*1.3 NM to RW01		RW01			
		6 NM		3 NM		1.3 NM					
CATEGORY		A		B		C				D	
LPV DA				1215-¾		200 (200-¾)					
LNAV/ VNAV DA				1415-1½		400 (400-1½)					
LNAV MDA		1440-¾ 425 (400-¾)				1440-1¼ 425 (400-1¼)					
CIRCLING		1620-1 572 (600-1)				1780-2 732 (800-2)		1860-2¾ 812 (900-2¾)			

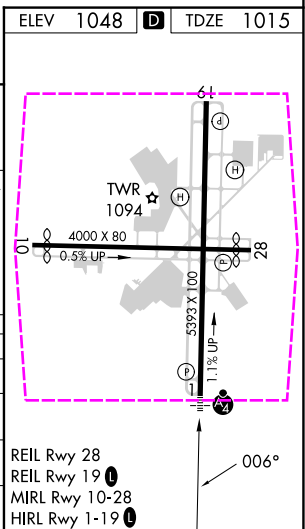

GREENVILLE, SOUTH CAROLINA
Orig-D 18JUN20

34°51'N-82°21'W

GREENVILLE DOWNTOWN (GMU)
RNAV (GPS) RWY 1

GREENVILLE, SOUTH CAROLINA

AL-180 (FAA)




25331

WAAS CH 53413 W01A	APP CRS 006°	Rwy Ldg TDZE 1015 Apt Elev 1048
--	------------------------	---

RNAV (GPS) RWY 1
GREENVILLE DOWNTOWN (GMU)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Greer altimeter setting. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cat D and Circling Cat C visibility ¼ mile. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cat C.	MALSF	MISSED APPROACH: Climb to 3400 direct GEBLL and via track 060° to PELAM and hold.
---	---------------------	---

ATIS 127.075	GREER APP CON ★ 118.8 270.275	GREENVILLE TOWER ★ 119.9 (CTAF) 0 257.7	GND CON 121.25	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

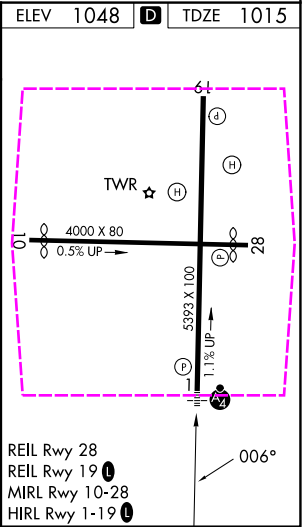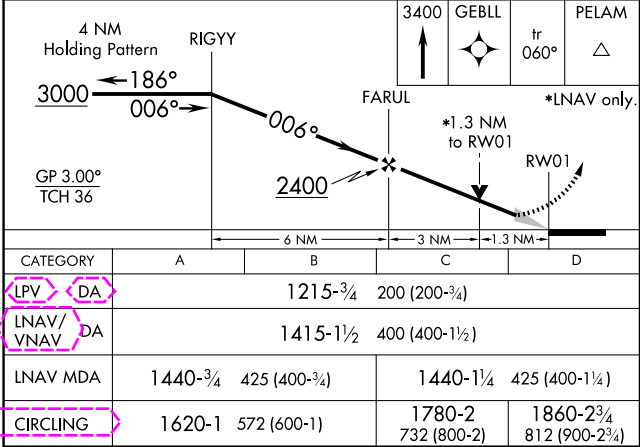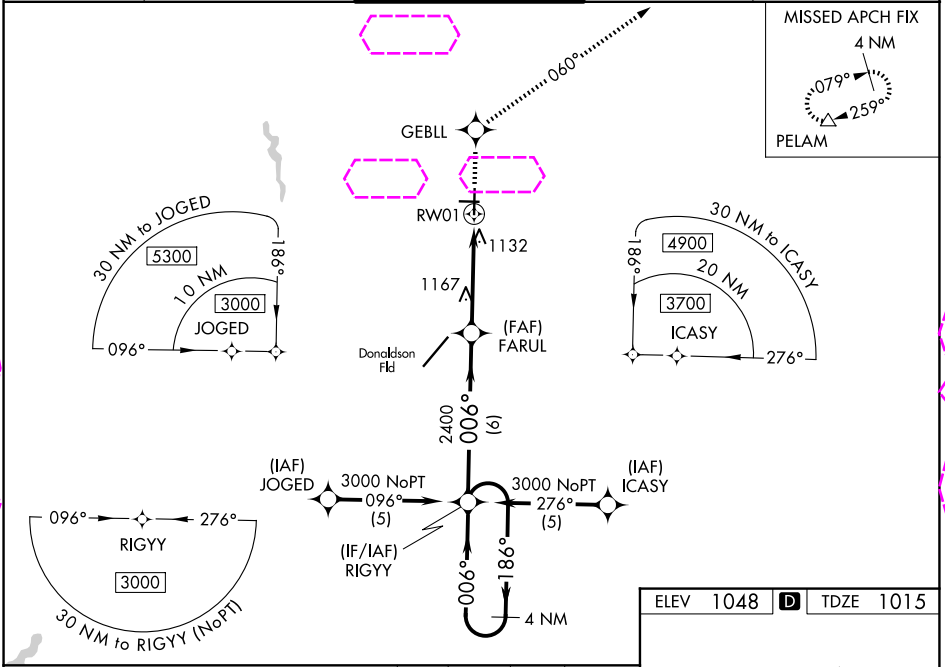

GREENVILLE, SOUTH CAROLINA
Orig-D 18JUN20

34°51'N-82°21'W

GREENVILLE DOWNTOWN (GMU)
RNAV (GPS) RWY 1

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025