
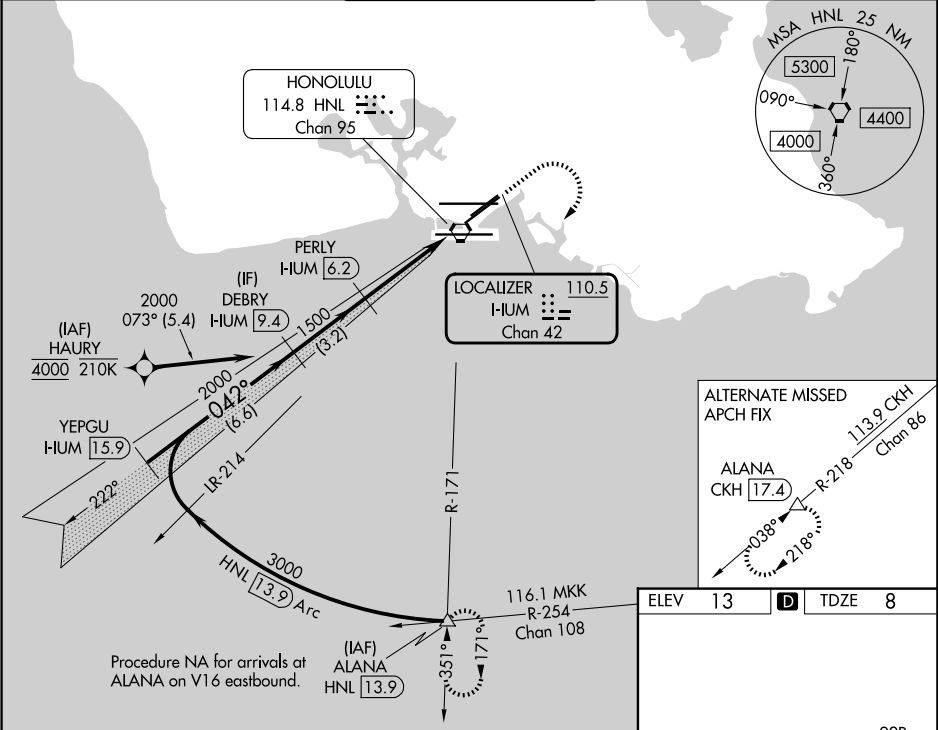


LOC/DME I-HUM 110.5 Chan 42	APP CRS 042°	Rwy Ldg 8950 TDZE 8 Apt Elev 13	ILS Z RWY 4R DANIEL K INOUEY INTL (HNL) (PHNL)
---	------------------------	--	--

From HAURY: RNAV 1-GPS required. DME or RADAR required. DME or RADAR required for procedure entry.	MALSR 	MISSED APPROACH: Climb to 540, Cat E climb to 780 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL VORTAC 13.9 DME and hold. * Missed approach requires minimum climb of 318 feet per NM to 1820, (if unable to meet climb gradient use S-ILS 4R minimums).
---	--	--

D-ATIS 127.9 251.15	HCF APPROACH 118.3 269.0	HONOLULU TOWER 118.1 257.8 123.9 273.575 (8R/26L)	GND CON 121.9 348.6	CINC DEL 121.4 281.4
-------------------------------	------------------------------------	---	-------------------------------	--------------------------------



VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 71°).					ELEV 13 D TDZE 8	
YEPGU I-HUM 15.9	DEBRY I-HUM 9.4	PERLY I-HUM 6.2	HNL R-171	ALANA		
3000	2000	1500	540	3000		
GS 3.00° TCH 55	042°	042°	hdg 220°	hdg 220°		
6.6 NM	3.2 NM	4.5 NM				
CATEGORY	A	B	C	D	E	
S-ILS 4R*	258-½	250 (300-½)			NA	
S-ILS 4R	308-½	299 (300-½)			566-1⅞ 557 (600-1⅞)	MIRL Rwy 4L-22R REIL Rwy 4L, 8R, 22L, 22R, and 26R HIRL Rwy 4R-22L, 8L-26R, and 8R-26L