

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>99602</b><br><b>W22A</b> | APP CRS<br><b>218°</b> | Rwy Idg<br>TDZE <b>964</b><br>Apt Elev <b>964</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 22

GREENVILLE SPARTANBURG INTL (GSP)

RNP APCH.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. When local altimeter setting not received, use Greenville downtown altimeter setting: increase LPV DA to 1193 feet; increase LNAV/VNAV DA to 1267 feet; increase all MDA 40 feet and LNAV Cat C/D visibility to RVR 4000; increase Circling Cat D visibility to 2½ SM. For inop ALS, when using Greenville downtown altimeter setting, increase LNAV/VNAV all Cats visibility to RVR 4500. VDP and Baro-VNAV NA when using Greenville downtown altimeter setting.

MALSR




MISSED APPROACH:  
Climb to 3000 direct  
OXABY and hold.

|                       |                                        |                                             |                         |                          |                         |
|-----------------------|----------------------------------------|---------------------------------------------|-------------------------|--------------------------|-------------------------|
| ATIS<br><b>134.25</b> | GREER APP CON★<br><b>118.8 270.275</b> | GREER TOWER★<br><b>120.1(CTAF) 0 251.15</b> | GND CON<br><b>121.9</b> | CLNC DEL<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|-----------------------|----------------------------------------|---------------------------------------------|-------------------------|--------------------------|-------------------------|

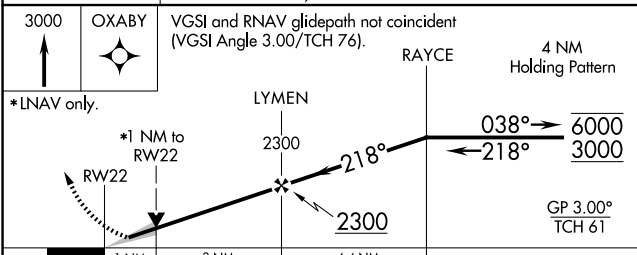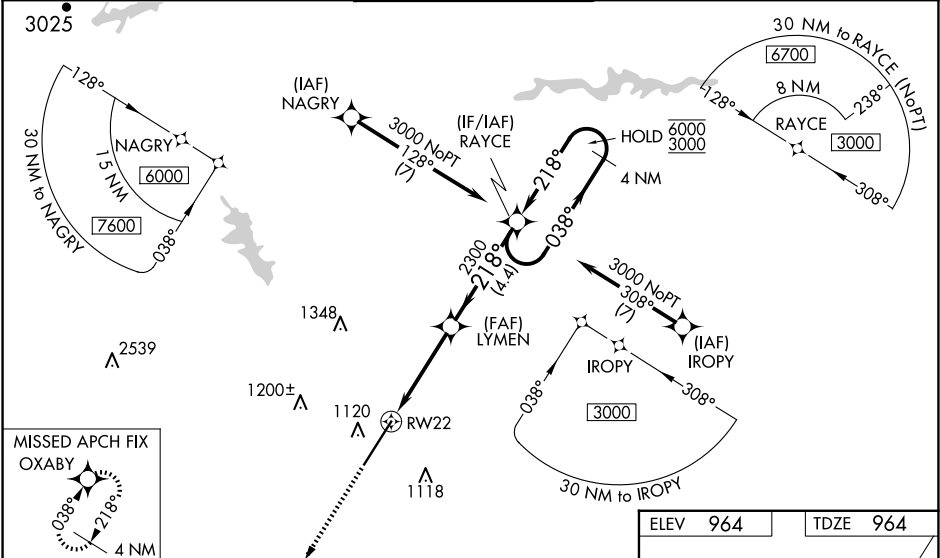

| CATEGORY     | A       | B           | C                       | D                       |
|--------------|---------|-------------|-------------------------|-------------------------|
| LPV DA       | 1164/24 | 200 (200-½) |                         |                         |
| LNAV/VNAV DA | 1238/24 | 274 (300-½) |                         |                         |
| LNAV MDA     | 1360/24 | 396 (400-½) | 1360/35                 | 396 (400-¾)             |
| CIRCLING     | 1440-1  | 476 (500-1) | 1480-1½<br>516 (600-1½) | 1700-2¼<br>736 (800-2¼) |

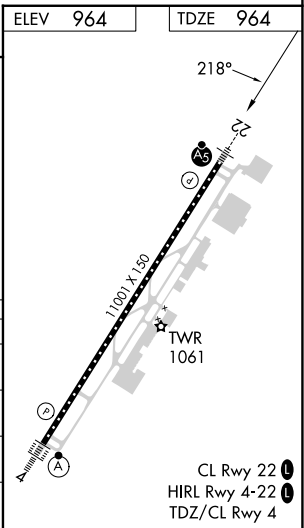

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025