

▼

⚠


Rwy 26 helicopter visibility reduction below 3/4 SM NA. VDP NA with Daniel Fld altimeter setting.

When local altimeter setting not received, use Daniel Fld altimeter setting and increase all MDAs 60 feet; increase LNAV and Circling Cats C and D visibility 1/2 SM.

MISSED APPROACH:

Climb to 3000 direct GONRE and on track 201° to HEPIG and hold.

ATIS 132.75	AUGUSTA APP CON★ 126.8 270.3	AUGUSTA TOWER★ 118.7 (CTAF) 239.3	GND CON 121.9 348.6	UNICOM 122.95
----------------	---------------------------------	--------------------------------------	------------------------	------------------

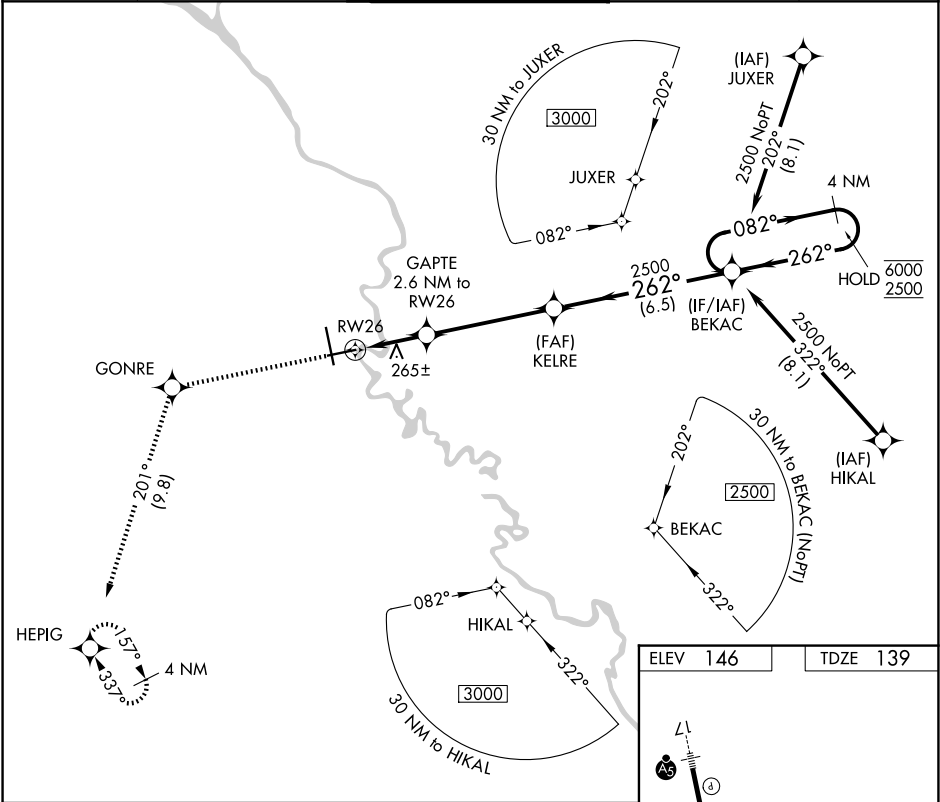

3000 ↑	GONRE ✦	tr 201° ✦	HEPIG				
RW26 1 NM to RW26 1.6 NM GAPTE 2.6 NM to RW26 1020 3.00° TCH 55 4.7 NM KELRE 2500 6.5 NM BEKAC 2500 4 NM Holding Pattern 082° → 6000 ← 262° 2500							
CATEGORY	A		B	C	D		
LNAV MDA	520-1 381 (400-1)			520-1½	381 (400-1½)		
CIRCLING	780-1 634 (700-1)			780-1¾ 634 (700-1¾)	940-2½ 794 (800-2½)		

