


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>93641</b><br><b>W17A</b> | APP CRS<br><b>167°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>8002</b><br><b>2164</b><br><b>2164</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 17

ASHEVILLE RGNL (AVL)

|                                                                                                                                                                                                                             |       |                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------------------------------------------------------------------------------|
| RNP APCH.                                                                                                                                                                                                                   | MALSR | MISSED APPROACH: Climb to 6200 direct AVEBE and hold, continue climb-in-hold to 6200. |
| Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 2 1/2 SM and increase LNAV Cats C/D visibility to 2 SM. |       |                                                                                       |

|                      |                                           |                                                        |                         |                         |
|----------------------|-------------------------------------------|--------------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>120.2</b> | ASHEVILLE APP CON*<br><b>124.65 351.8</b> | ASHEVILLE TOWER*<br><b>121.1</b> (CTAF) <b>0 257.8</b> | GND CON<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|----------------------|-------------------------------------------|--------------------------------------------------------|-------------------------|-------------------------|

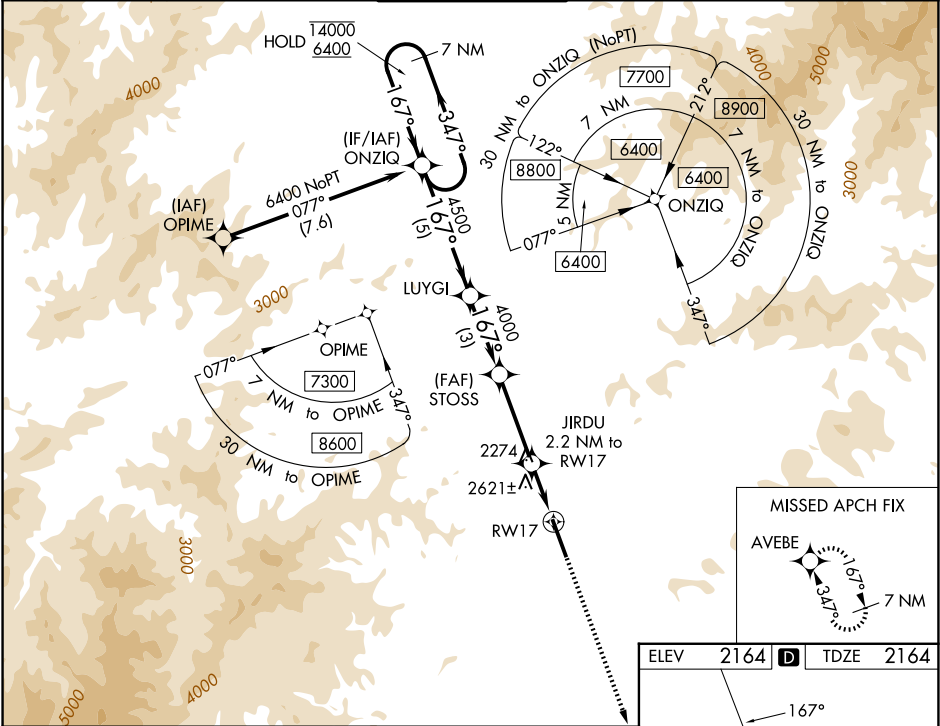

|                      |                        |       |                          |        |                      |       |
|----------------------|------------------------|-------|--------------------------|--------|----------------------|-------|
| 7 NM Holding Pattern |                        | ONZIQ | LUYGI                    | STOSS  | JIRDU                | AVEBE |
| 14000 ← 347°         |                        |       |                          | 4000   | 2274                 | 6200  |
| 6400 → 167°          |                        |       |                          | 4000   | 2274                 |       |
| GP 3.00°             |                        |       |                          | 4000   | 2274                 |       |
| TCH 55               |                        |       |                          | 4000   | 2274                 |       |
|                      |                        | 5 NM  | 3 NM                     | 3.4 NM | 2.2 NM               |       |
| CATEGORY             | A                      | B     | C                        | D      |                      |       |
| LPV DA               | 2364-1/2               |       | 200 (200-1/2)            |        |                      |       |
| LNAV/VNAV DA         | 2960-13/4              |       | 796 (800-13/4)           |        |                      |       |
| LNAV MDA             | 2880-1/2 716 (800-1/2) |       | 2880-15/8 716 (800-15/8) |        |                      |       |
| CIRCLING             | 2880-1 716 (800-1)     |       | 3460-3 1296 (1300-3)     |        | 3720-3 1556 (1600-3) |       |

