

LOC/DME I-GSP 109.3 Chan 30	APP CRS 038°	Rwy ldg 11001 TDZE 947 Apt Elev 964	ILS or LOC RWY 4 GREENVILLE SPARTANBURG INTL (GSP)
---	------------------------	--	---


DME required.

For inop ALS, increase S-LOC 4 Cats C and D visibility to RVR 5500. When local altimeter setting not received, use Greenville Downtown altimeter setting: increase DA to 1176 feet; increase all MDAs 40 feet and visibility S-LOC 4 Cat C/D to RVR 4000 and Circling Cat D ¼ SM. For inop ALS, when using Greenville Downtown altimeter setting, increase S-LOC 4 Cats C/D visibility to RVR 6000.

ALSf-2

MISSED APPROACH:
Climb to 3000 then right turn direct SPA VORTAC and hold.

ATIS 134.25	GREER APP CON★ 118.8 270.275	GREER TOWER★ 120.1 (CTAF) 251.15	GND CON 121.9	CLNC DEL 121.9	UNICOM 122.95
-----------------------	--	--	-------------------------	--------------------------	-------------------------

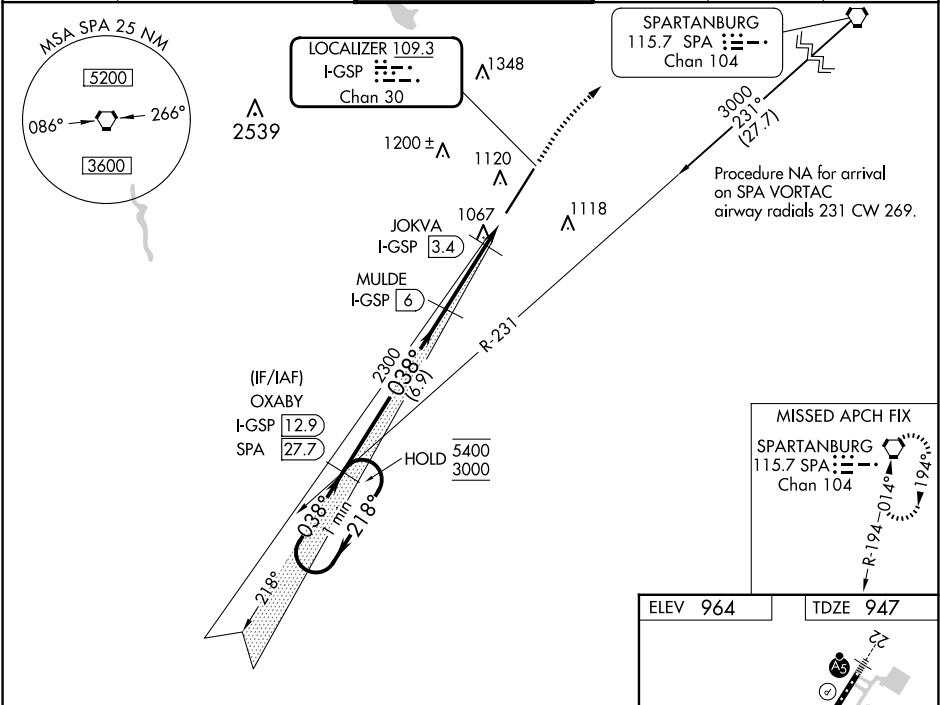

One Minute Holding Pattern		OXABY I-GSP 12.9	MULDE I-GSP 6	JOKVA I-GSP 3.4	SPA
5400 ← 218°		3000 → 038°	2300	*1460	
GS 3.00° TCH 55		6.9 NM	2.6 NM	1.5 NM	
CATEGORY	A	B	C	D	
S-ILS 4	1147/18 200 (200-½)				
S-LOC 4	1320/24	373 (400-½)	1320/35	373 (400-¾)	
CIRCLING	1440-1	476 (500-1)	1480-1½ 516 (600-1½)	1700-2¼ 736 (800-2¼)	

ELEV 964

TDZE 947

1100 X 150

TWR 1061

038°

CL Rwy 22

HIRL Rwy 4-22

TDZ/CL Rwy 4