


LOC/DME I-HUM	APP CRS	Rwy Ldg
110.5	042°	8950
Chan 42		TDZE 8
		Apt Elev 13

ILS Y RWY 4R

DANIEL K INOUEY INTL (HNL) (PHNL)

DME required. From HUBAP: RNAV 1-GPS required. DME or RADAR required for procedure entry.	MALSR	MISSED APPROACH: Climb to 540 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL 13.9 DME and hold. *Missed approach requires minimum climb of 318 feet per NM to 1820. (If unable to meet climb gradient use S-ILS 4R minimums).
For inop ALS, increase S-ILS 4R all Cats visibility to ¾ SM.		

D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON	CLNC DEL
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (8R/26L)	121.9 348.6	121.4 281.4

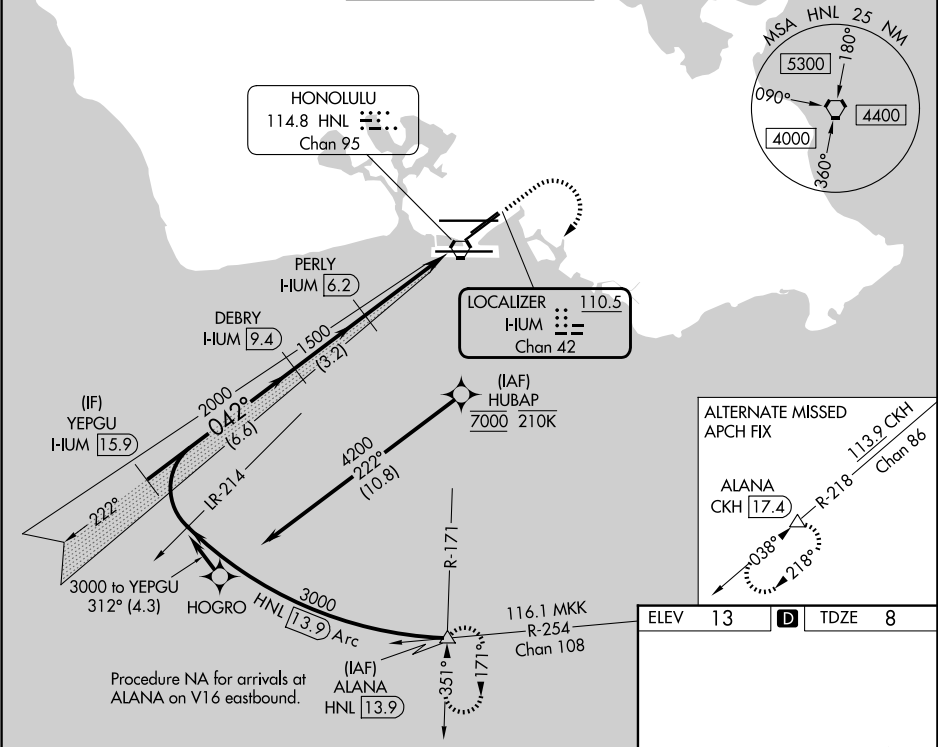

VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 71).				
YEPGU I-HUM [15.9]	DEBRY I-HUM [9.4]	PERLY I-HUM [6.2]	HNL R-171	ALANA
3000	2000	1500	540	3000
GS 3.00° TCH 55	042°	1500	hdg 220°	
6.6 NM	3.2 NM	4.5 NM		
CATEGORY	A	B	C	D
S-ILS 4R*		258-1½	250 (300-½)	
S-ILS 4R		308-1½	299 (300-½)	

