

ATLANTA, GEORGIA

AL-26 (FAA)

25219

WAAS CH 56300 W26A	APP CRS 275°	Rwy Ldg 9999 TDZE 996 Apt Elev 1026
--	------------------------	--

RNAV (GPS) RWY 26L
HARTSFIELD/JACKSON ATLANTA INTL (ATL)




▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all Cats visibility to RVR 6000. Simultaneous approach authorized with Rwy 27L or 27R or 28. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.



MISSED APPROACH:
Climb to 1500 then climbing right turn to 3500 direct TROYS and hold.



D-ATIS ARR 119.65	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS					ALL RWYS	GND CON (8L-26R,8R-26L) (9L-27R,9R-27L) 10-28 RWYS	ALL RWYS
DEP 125.55		119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75 121.65 254.4

CLNC DEL 118.1	CPDLC
-----------------------------	-------

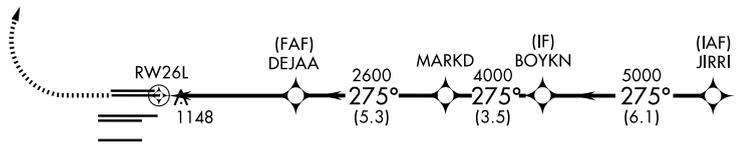

ELEV 1026	D	TDZE 996
-----------	----------	----------

RADAR REQUIRED

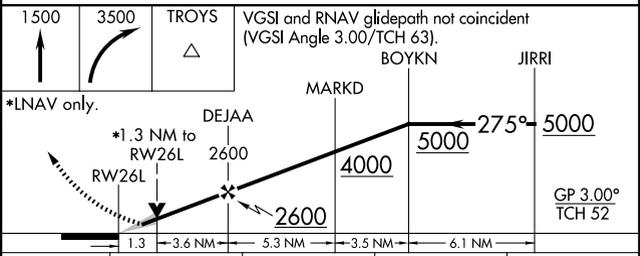

CATEGORY	A	B	C	D
LPV DA		1281/24	285 (300-½)	
LNAV/VNAV DA		1360/35	364 (400-½)	
LNAV MDA	1460/24	464 (500-½)	1460/50	464 (500-1)

HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R,
27L and 28

ATLANTA, GEORGIA
Amdt 4 18SEP14

33°38'N-84°26'W

HARTSFIELD/JACKSON ATLANTA INTL (ATL)
RNAV (GPS) RWY 26L

SE-4, 19 FEB 2026 to 19 MAR 2026

SE-4, 19 FEB 2026 to 19 MAR 2026

ATLANTA, GEORGIA

AL-26 (FAA)

26078

WAAS CH 56300 W26A	APP CRS 275°	Rwy Ldg 9999 TDZE 996 Apt Elev 1026
--	------------------------	--




RNAV (GPS) RWY 26L
HARTSFIELD/JACKSON ATLANTA INTL (ATL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all Cats visibility to RVR 6000. Simultaneous approach authorized with Rwy 27L or 27R or 28. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.



MISSED APPROACH:
Climb to 1500 then climbing right turn to 3500 direct TROYS and hold.

D-ATIS 119.65	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4					ALL RWYS 121.9	GND CON (8L-26R,8R-26L) (9L-27R,9R-27L) 10-28 RWYS 121.75 121.65 254.4
-------------------------	--	--	--	--	--	--	-----------------------------	---

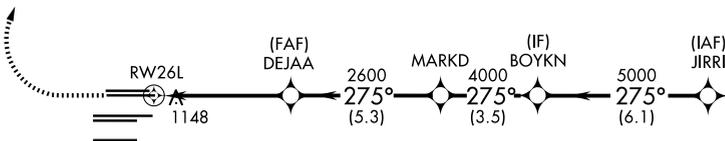



SE-4, 19 MAR 2026 to 16 APR 2026

SE-4, 19 MAR 2026 to 16 APR 2026

ELEV 1026	D	TDZE 996
-----------	----------	----------

RADAR REQUIRED

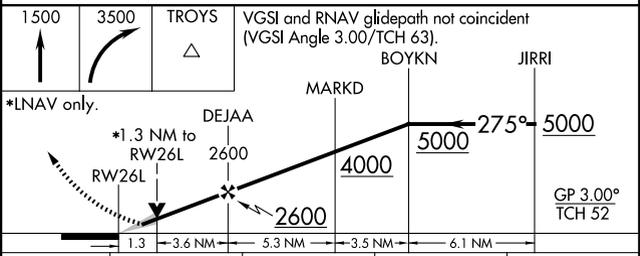

CATEGORY	A	B	C	D
LPV DA		1281/24	285 (300-½)	
LNAV/VNAV DA		1360/35	364 (400-½)	
LNAV MDA	1460/24	464 (500-½)	1460/50	464 (500-1)

HIRL all Rwy's
TDZ/CL Rwy's 8L,
9R, 10, 26R, 27L and 28

ATLANTA, GEORGIA
Amdt 4 18SEP14

33°38'N-84°26'W

HARTSFIELD/JACKSON ATLANTA INTL (ATL)
RNAV (GPS) RWY 26L