

ATLANTA, GEORGIA

AL-26 (FAA)

25219

WAAS CH 97400 W09B	APP CRS 095°	Rwy Ldg TDZE 1026 Apt Elev 1026
--	------------------------	---

RNAV (GPS) RWY 9R


HARTSFIELD/JACKSON ATLANTA INTL (ATL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 8L or 8R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSIF-2
MISSED APPROACH: Climb to 4000 direct RATCH and on track 092° to CONNI and hold.


D-ATIS ARR 119.65	ATLANTA APP CON	ATLANTA TOWER					ALL RWYS	GND CON	ALL RWYS
DEP 125.55	127.9 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28
		119.1	125.325	123.85	119.3	119.5	121.9	121.75	121.65
						254.4			254.4

CLNC DEL	CPDLC
118.1	

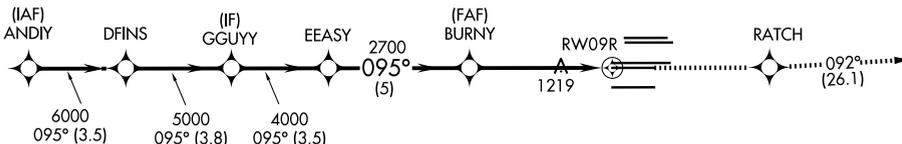


SE-4, 19 FEB 2026 to 19 MAR 2026



SE-4, 19 FEB 2026 to 19 MAR 2026



RADAR REQUIRED



ELEV 1026	TDZE 1026
-----------	-----------

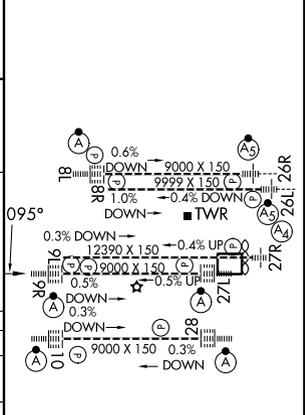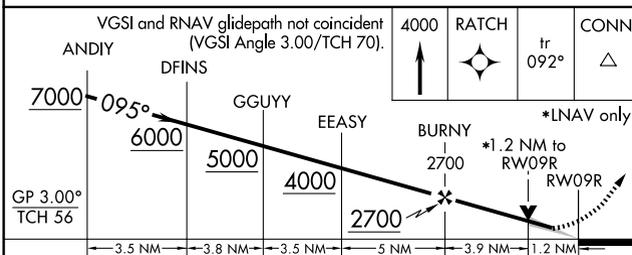

CATEGORY	A	B	C	D
LPV DA		1226/18	200 (200-½)	
LNAV/VNAV DA		1403/40	377 (500-¾)	
LNAV MDA	1480/24	454 (500-½)	1480/45	454 (500-¾)

HIRL all Rwy's
TDZ/CL Rwy's 8L, 9R, 10, 26R,
27L and 28

ATLANTA, GEORGIA
Amdt 4B 12OCT17

33°38'N-84°26'W

RNAV (GPS) RWY 9R

