

25219

ATLANTA, GEORGIA

AL-26 (FAA)

# RNAV (GPS) PRM Y RWY 28 (SIMULTANEOUS CLOSE PARALLEL) HARTSFIELD/JACKSON ATLANTA INTL (ATL)

WAAS CH <b>61299</b> <b>W28A</b>	APP CRS <b>275°</b>	Rwy Ldg TDZE <b>998</b> Apt Elev <b>1026</b>
--	------------------------	--

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous close parallel approach authorized with ILS PRM and RNAV PRM Rwy 26R or 26L or 27R or 27L, or Rwys 26R and 27R, or Rwys 26L and 27L, or Rwys 26L and 27L. Use of FD or AP providing RNAV track guidance required during simultaneous operations. Dual VHF Comm required. See additional requirements on AAUP.


ALSF-2  
MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.

D-ATIS ARR <b>119.65</b> DEP <b>125.55</b>	ATLANTA APP CON <b>127.9 379.9</b>	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS <b>119.1 125.325 123.85 119.3 119.5 254.4</b> PRM <b>133.425</b>	ALL RWYS <b>121.9 121.75 121.65 254.4</b>	GND CON 8L-26R,8R-26L 9L-27R,9R-27L 10-28 RWYS <b>121.9 121.75 121.65 254.4</b>
--	---------------------------------------	--	--	---


CLNC DEL <b>118.1</b>	CPDLC
-----------------------------	-------

SE-4, 19 FEB 2026 to 19 MAR 2026


SE-4, 19 FEB 2026 to 19 MAR 2026

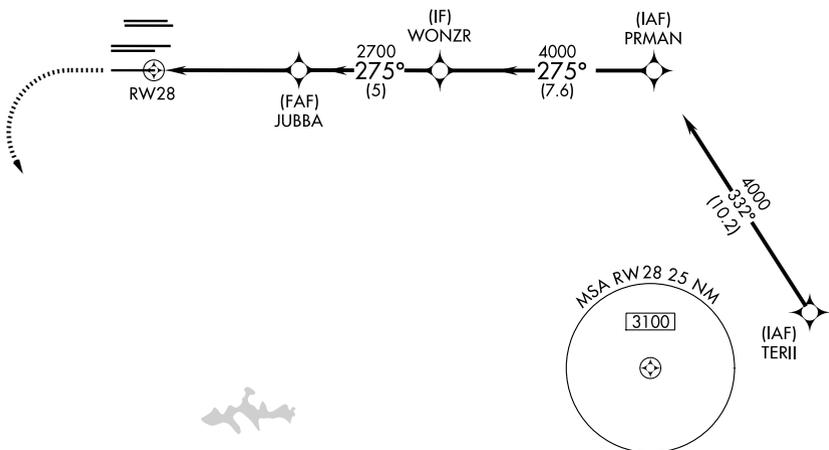

**RADAR REQUIRED**

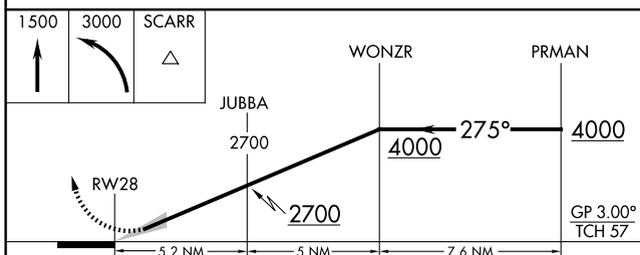

CATEGORY	A	B	C	D
LPV DA		1198/18	200 (200-1/2)	
LNAV/VNAV DA		1250/24	252 (300-1/2)	

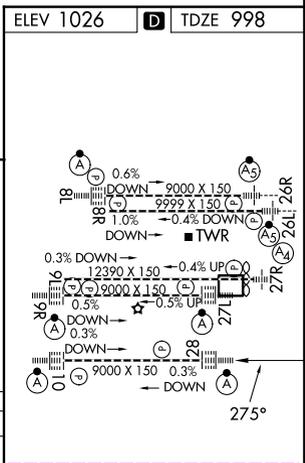

HIRL all Rwys  
TDZ/CL Rwys 8L, 9R, 10, 26R,  
27L and 28

ATLANTA, GEORGIA  
Orig-A 12OCT17

33°38'N-84°26'W

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

# RNAV (GPS) PRM Y RWY 28 (SIMULTANEOUS CLOSE PARALLEL)

26078

ATLANTA, GEORGIA

AL-26 (FAA)

# RNAV (GPS) PRM Y RWY 28 (SIMULTANEOUS CLOSE PARALLEL) HARTSFIELD/JACKSON ATLANTA INTL (ATL)

WAAS CH <b>61299</b> <b>W28A</b>	APP CRS <b>275°</b>	Rwy Ldg TDZE <b>998</b> Apt Elev <b>1026</b>
--	------------------------	--



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous close parallel approach authorized with ILS PRM and RNAV PRM Rwy 26R or 26L or 27R or 27L, or Rwys 26R and 27R, or Rwys 26L and 27L, or Rwys 26L and 27L. Use of FD or AP providing RNAV track guidance required during simultaneous operations. Dual VHF Comm required. See additional requirements on AAUP.

ALSF-2  
MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.

D-ATIS <b>119.65</b>	ATLANTA APP CON <b>127.9 379.9</b>	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS <b>119.1 125.325 123.85 119.3 119.5 254.4</b> PRM <b>133.425</b>	ALL RWYS <b>121.9 121.75 121.65 254.4</b>	GND CON 10-28 RWYS <b>121.9 121.75 121.65 254.4</b>
-------------------------	---------------------------------------	--	--	---

SE-4, 19 MAR 2026 to 16 APR 2026

SE-4, 19 MAR 2026 to 16 APR 2026

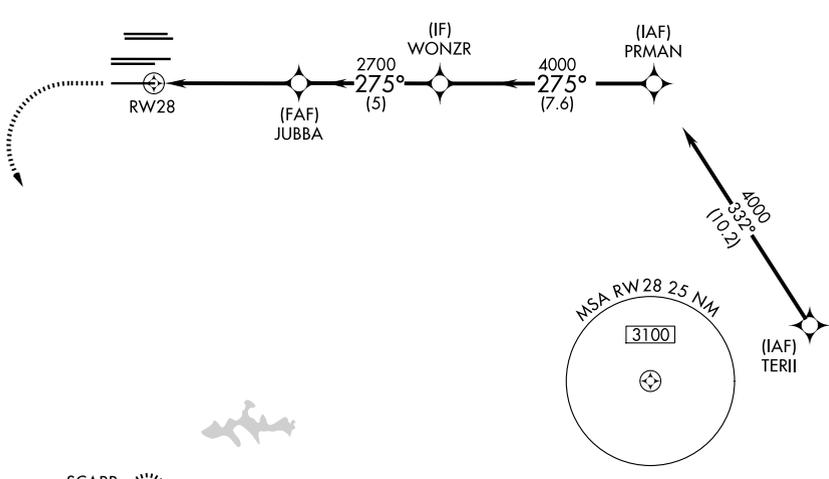

**RADAR REQUIRED**

1500	3000	SCARR	
↑	↘	△	
RWY 28		JUBBA	WONZR
2700		4000	PRMAN
2700		4000	4000
5.2 NM		5 NM	7.6 NM
CATEGORY	A	B	C
LPV DA		1198/18	200 (200-1/2)
LNAV/VNAV DA		1250/24	252 (300-1/2)

ELEV 1026 TDZE 998

Obstacle chart showing various obstacles with MSL and AGL altitudes, and clearance percentages.

HIRL ovl Rwys  
TDZL/RCLS Rwys 8L,  
9R, 10, 26R, 27L and 28