


HI-ILS or LOC RWY 23R


LOC I-BUI 111.7	APCH CRS 231°	Rwy Idg 9495	TDZE 984	Arprt Elev 986	[USAF]	MC GHEE TYSON (KTYS)
DME required			ALSF-2		MISSED APPROACH: Climb to 2000 then dimbing right turn to 4000 on heading 240° and VXV VORTAC R-231 to GROSS/VXV 29.1 DME and hold.	
▼ *When ALS inop, increase CAT E RVR to 40, vis to ¾ mile. **When ALS inop, increase vis to 1½ miles.						

ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	GND CON 121.9 348.6	CLNC DEL 121.65
------------------------------	--	--	--------------------------------------	----------------------------------

RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using altimeter setting).

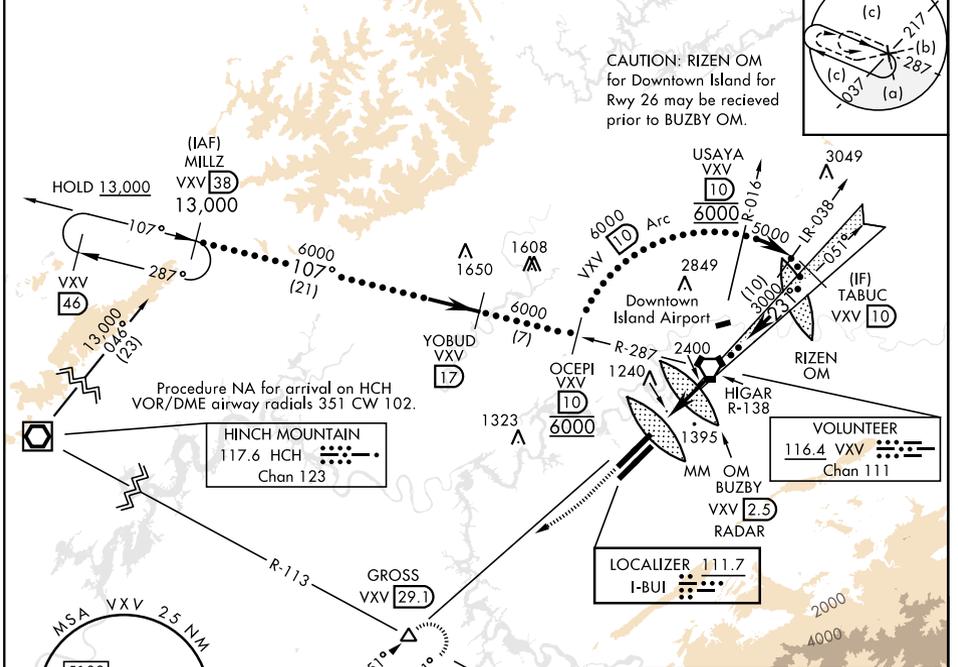

ELEV 986	TDZE 984																									
HIRL Rwy 5R-23L, 5L-23R REIL Rwy 5R-23L TDZL/RCLS Rwy 5R, 23R																										
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%;">2000</td> <td style="width:10%;">4000</td> <td style="width:10%;">GROSS VXV 29.1</td> </tr> <tr> <td style="text-align: center;">↑</td> <td style="text-align: center;">hdg 240°</td> <td></td> </tr> </table>	2000	4000	GROSS VXV 29.1	↑	hdg 240°		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%;">OM BUZBY RADAR</td> <td style="width:10%;">TABUC VXV 10</td> </tr> <tr> <td style="width:10%;">VXV 2.5</td> <td style="width:10%;">HIGAR R-138</td> </tr> <tr> <td style="width:10%;">VXV 6.6</td> <td style="width:10%;">MM</td> </tr> </table>	OM BUZBY RADAR	TABUC VXV 10	VXV 2.5	HIGAR R-138	VXV 6.6	MM	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%;">C</td> <td style="width:10%;">D</td> <td style="width:10%;">E</td> </tr> <tr> <td style="width:10%;">S-ILS 23R *</td> <td style="width:10%;">1184/1800</td> <td style="width:10%;">200 (200-½)</td> </tr> <tr> <td style="width:10%;">S-LOC 23R **</td> <td style="width:10%;">1560-1¼</td> <td style="width:10%;">576 (600-1¼)</td> </tr> <tr> <td style="width:10%;">CIRCLING</td> <td style="width:10%;">1660-2 674 (700-2)</td> <td style="width:10%;">1900-3 914 (1000-3)</td> </tr> </table>	C	D	E	S-ILS 23R *	1184/1800	200 (200-½)	S-LOC 23R **	1560-1¼	576 (600-1¼)	CIRCLING	1660-2 674 (700-2)	1900-3 914 (1000-3)
2000	4000	GROSS VXV 29.1																								
↑	hdg 240°																									
OM BUZBY RADAR	TABUC VXV 10																									
VXV 2.5	HIGAR R-138																									
VXV 6.6	MM																									
C	D	E																								
S-ILS 23R *	1184/1800	200 (200-½)																								
S-LOC 23R **	1560-1¼	576 (600-1¼)																								
CIRCLING	1660-2 674 (700-2)	1900-3 914 (1000-3)																								

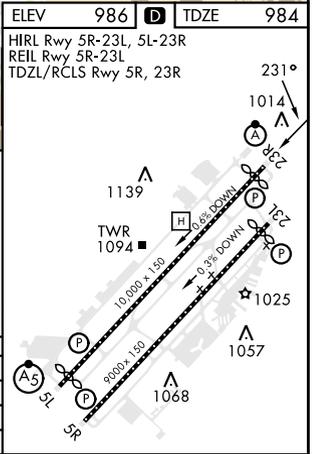

HI-ILS or LOC RWY 23R

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026