


APP CRS	Rwy Ldg 11830
259°	TDZE 10
	Apt Elev 13


RNAV (RNP) RWY 26L

DANIEL K INOUEY INTL (HNL) (PHNL)

RNP AR APCH, RF required.		MALSF	MISSED APPROACH: Climb to 3000 on track 259° to KABTE, left turn to LAYIG, then track 133° to ALANA and hold. Missed approach requires minimum climb of 234 feet per NM to 300.
For uncompensated Baro-VNAV systems, procedure NA below 15°C (58°F) or above 53°C (128°F).			

D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON	CLNC DEL
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (8R/26L)	121.9 348.6	121.4 281.4

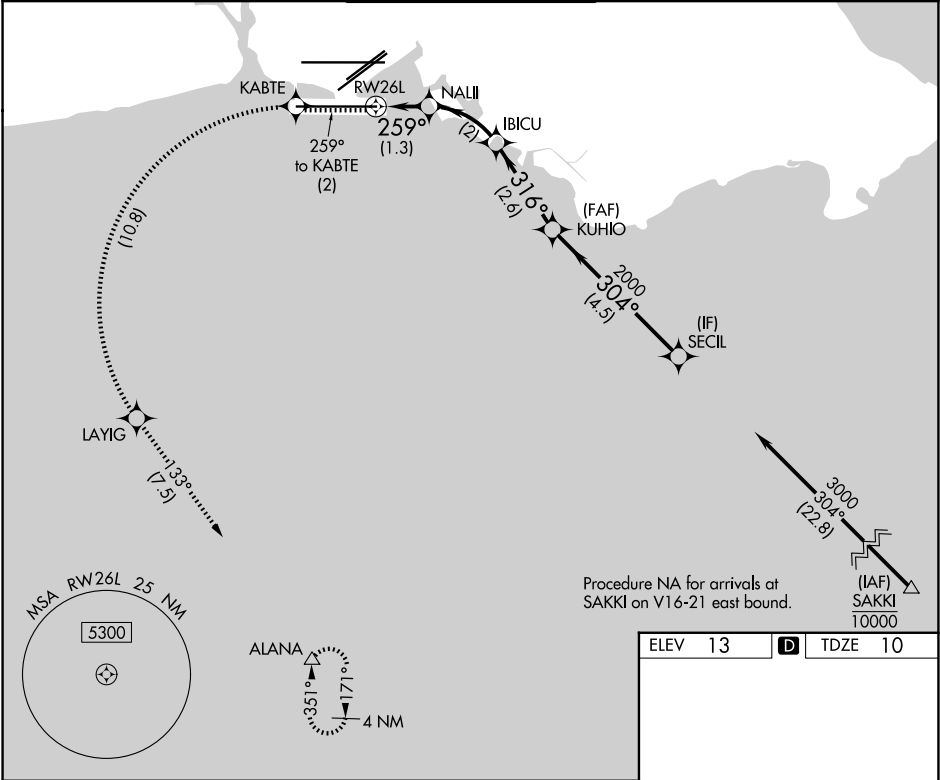

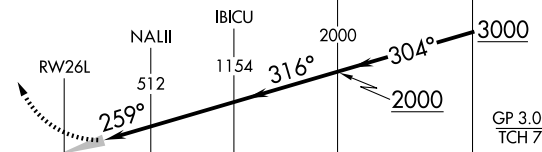3000 ↑ tr 259°	KABTE 	LAYIG 	tr 133°	ALANA △		
					SECIL	
CATEGORY		B		C		D
RNP 0.15 DA		260-¾ 250 (300-¾)				
AUTHORIZATION REQUIRED						

ELEV 13 D TDZE 10

MIRL Rwy 4L-22R
REIL Rwys 4L, 8R, 22L, 22R, and 26R
HIRL Rwys 4R-22L, 8L-26R, and 8R-26L

PAC, 19 MAR 2026 to 14 MAY 2026

PAC, 19 MAR 2026 to 14 MAY 2026