

APP CRS	Rwy Ldg	9000
275°	TDZE	998
	Apt Elev	1026

RNAV (RNP) Z RWY 28



HARTSFIELD/JACKSON ATLANTA INTL (ATL)

▽ For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized; arrival from RODNN NA. For inop ALS, increase RNP 0.11 DA all Cats visibility to RVR 4000 and RNP 0.30 DA all Cats visibility to RVR 4500.



MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.


D-ATIS	ATLANTA APP CON	ATLANTA TOWER				ALL RWYS	GND CON	ALL RWYS
119.65	127.9 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	(8L-26R, 8R-26L) (9L-27R, 9R-27L)	10-28
		119.1	125.325	123.85	119.3	119.5	125.4	121.9
								121.75
								121.65
								254.4

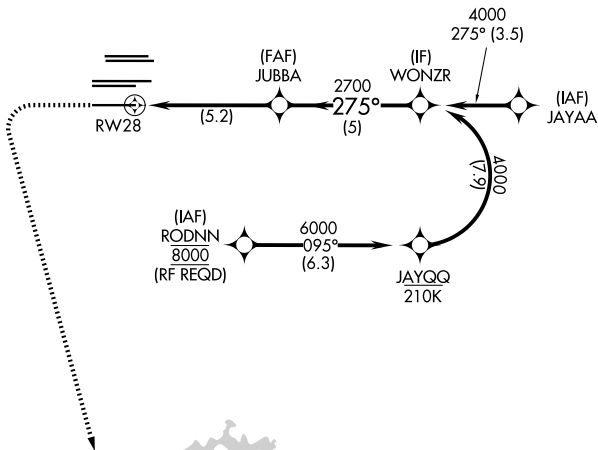

SE-4, 11 JUN 2026 to 09 JUL 2026

SE-4, 11 JUN 2026 to 09 JUL 2026

ELEV 1026	D	TDZE 998
-----------	----------	----------



HIRL all Rwys
TDZL/RCLS Rwys 8L, 9R, 10, 26R, 27L and 28

1500	3000	SCARR
↑	↶	△

CATEGORY	A	B	C	D
RNP 0.11 DA		1248/24	250 (300-1/2)	
RNP 0.30 DA		1295/24	297 (300-1/2)	

AUTHORIZATION REQUIRED