


LOC/DME I-SNA 111.75 Chan 54(Y)	APP CRS 016°	Rwy Ldg 5700 TDZE 56 Apt Elev 56
--	------------------------	---


LOC BC RWY 2L
JOHN WAYNE/ORANGE COUNTY (SNA)

⚠ Circling Rwy 20L NA at night.	MISSED APPROACH: Climb to 800 then climbing left turn to 2600 direct SLI VORTAC and hold.
--	---


D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER* 126.8 (CTAF) 343.625	GND CON 120.8	UNICOM 122.95
------------------------	-------------------------------------	--	-------------------------	-------------------------

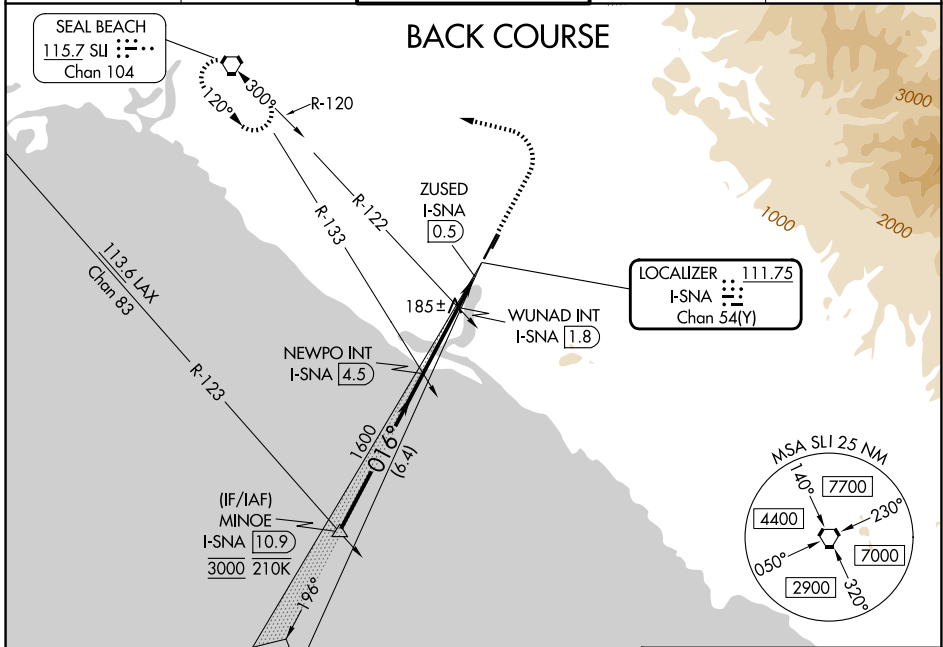

ELEV 56	D TDZE 56
---------	------------------

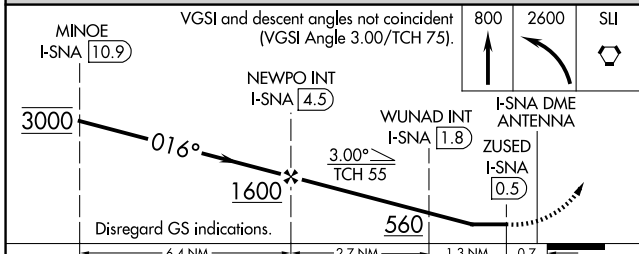

REIL Rwy 20L
MIRL Rwy 2R-20L
HIRL Rwy 2L-20R

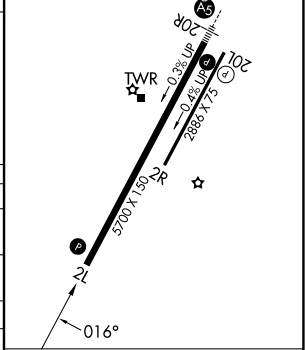

CATEGORY	A	B	C	D
S-LOC 2L	560-1	504 (600-1)	560-1 3/8	504 (600-1 3/8)
CIRCLING	640-1	584 (600-1)	840-2 1/4 784 (800-2 1/4)	1180-3 1124 (1200-3)
WUNAD FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 2L	480-1	424 (500-1)	480-1 1/4	424 (500-1 1/4)
CIRCLING	640-1	584 (600-1)	840-2 1/4 784 (800-2 1/4)	1180-3 1124 (1200-3)

FAF to MAP 3.9 NM					
Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18