


| | | | |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 93847 W02A | APP CRS 016° | Rwy Ldg TDZE Apt Elev | 5700 56 56 |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) Y RWY 2L

JOHN WAYNE/ORANGE COUNTY (SNA)


| | | | |
|-----------------|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--|
| RNP APCH - GPS. | | MISSED APPROACH: Climb to 800 then climbing left turn to 2600 direct SLI VORTAC and hold. | |
| ▼ | Circling Rwy 20L NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. | | |

| | | | | |
|------------------------|-------------------------------------|-----------------------------------------------------|-------------------------|-------------------------|
| D-ATIS 126.0 | SOCAL APP CON 121.3 263.1 | JOHN WAYNE TOWER * 126.8 (CTAF) 0 343.625 | GND CON 120.8 | UNICOM 122.95 |
|------------------------|-------------------------------------|-----------------------------------------------------|-------------------------|-------------------------|

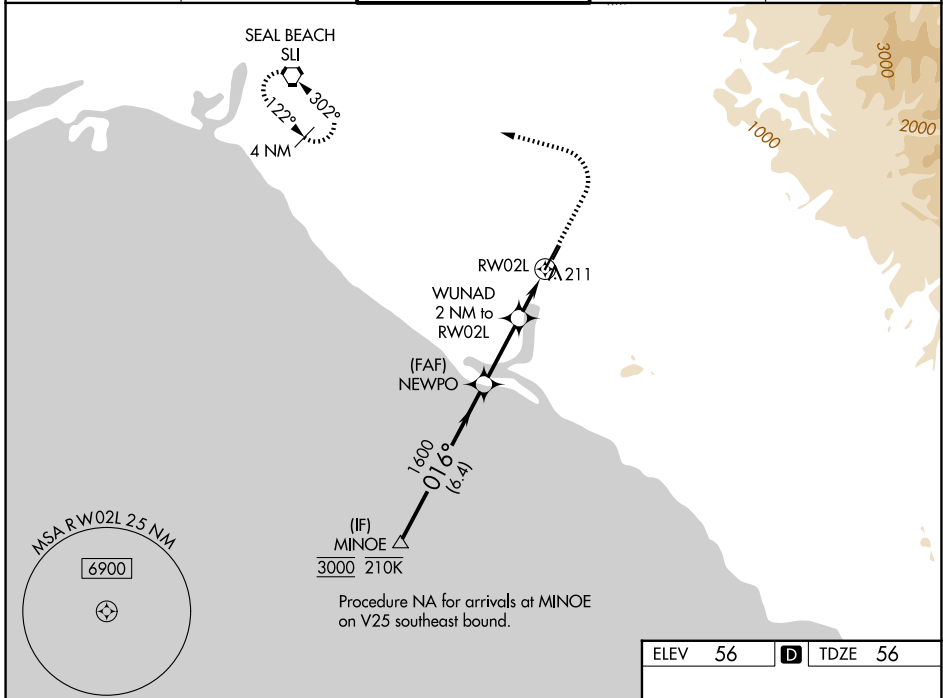


Procedure NA for arrivals at MINOE on V25 southeast bound.

| | |
|---------|------------------|
| ELEV 56 | D TDZE 56 |
|---------|------------------|

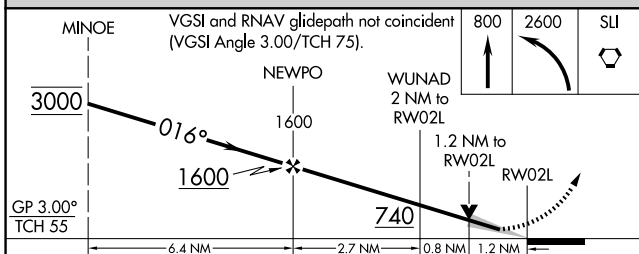

| CATEGORY | A | B | C | D |
|--------------|-------|-------------|------------------------------|-------------------------|
| LPV DA | | 306-3/4 | 250 (300-3/4) | |
| LNAV/VNAV DA | | 380-1 | 324 (400-1) | |
| LNAV MDA | 520-1 | 464 (500-1) | 520-13/8 | 464 (500-13/8) |
| CIRCLING | 640-1 | 584 (600-1) | 840-2 1/4 784 (800-2 1/4) | 1180-3 1124 (1200-3) |

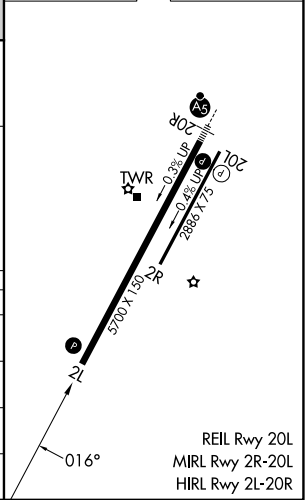

SW-3, 11 JUN 2026 to 09 JUL 2026

SW-3, 11 JUN 2026 to 09 JUL 2026