

APP CRS 024°	Rwy Ldg 6995 TDZE 55 Apt Elev 55
------------------------	---

RNAV (RNP) Z RWY 2

RNP AR APCH - GPS.

T For uncompensated Baro-VNAV systems, procedure NA below 14°C or above 54° C. When local altimeter setting not received, procedure NA. For inop ALS, increase RNP 0.30 all Cats visibility to $\frac{7}{8}$ SM.

MALSR



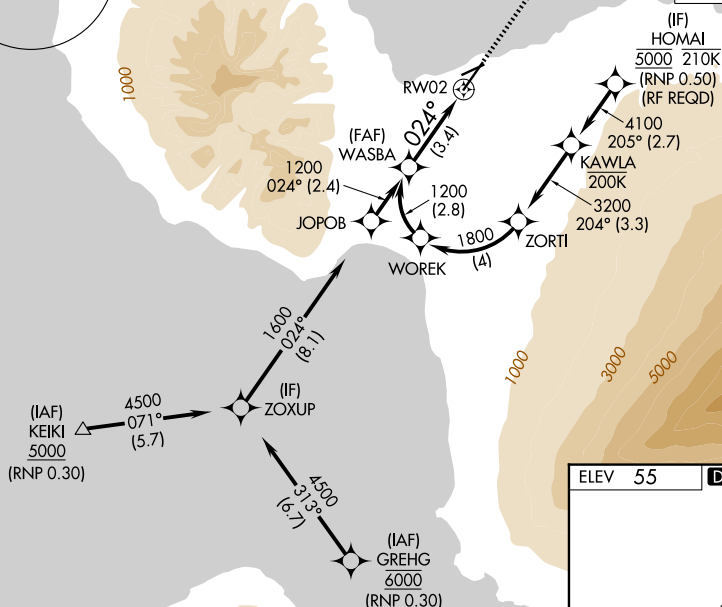

MISSED APPROACH: Climb to 3000
direct KRANE and hold.

ATIS
128.6

HCF APPROACH
120.2 322.4 (N)
119.5 225.4 (S)

MAUI TOWER ★
118.7 (CTAF) **L** 279.6

GND CON
121.9 279.6

UNICOM
122.95

WASBA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).

3000

KRANE

1 200

GP 3.00°
TCH 62

See planview for multiple IF locations.

RW02

CATEGORY

A

B

C

RNP 0.30 DA

394- $\frac{1}{2}$ 339 (400- $\frac{1}{2}$)

AUTHORIZATION REQUIRED

