

ATLANTA, GEORGIA

AL-26 (FAA)

26078


LOC/DME I-BRU 108.7 Chan 24	APP CRS 275°	Rwy Ldg 9999 8500 TDZE 996 990 Apt Elev 1026 1026
---	------------------------	--

ILS or LOC RWY 26L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)



RADAR required.

▼ Inop table does not apply to sidestep Rwy 26R Cats A and B. For inop ALS, increase S-ILS 26L all Cats visibility to RVR 4500 and S-LOC 26L Cat E visibility to RVR 6000. For inop ALS to Rwy 26R, increase sidestep 26R Cat E visibility to 2 SM. Simultaneous approach authorized.





MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 on heading 290° and RMG R-132 to DALAS INT/RMG VORTAC 18.5 DME and hold.

D-ATIS 119.65	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4					GND CON [8L-26R, 8R-26L] [9L-27R, 9R-27L] 10-28 RWYS 121.9 121.75 121.65 254.4		ALL RWYS
-------------------------	---------------------------------------	--	--	--	--	--	---	--	-------------

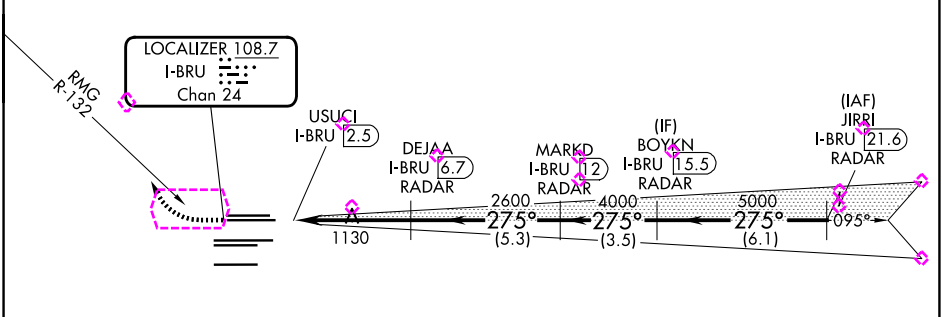

ELEV 1026	D	TDZE 26L 996 TDZE 26R 990
-----------	---	------------------------------

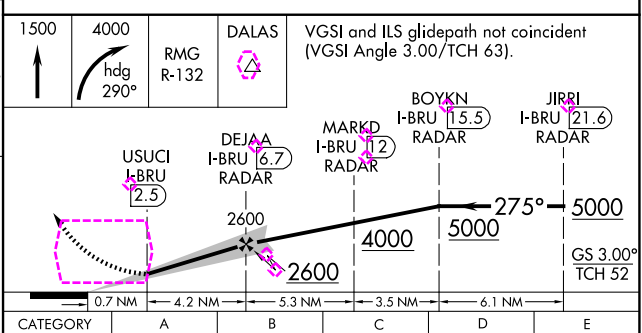

HIRL all Rws TDZL/RCLS Rws 8L, 9R, 10, 26R, 27L and 28						S-ILS 26L	1280/24 284 (300-½)					
FAF to MAP 4.2 NM						S-LOC 26L	1380/24 384 (400-½)			1380/35 384 (400-⅝)		
Knots	60	90	120	150	180	SIDESTEP 26R	1380/55 390 (400-1)				1380-1½ 390 (400-1½)	
Min:Sec	4:12	2:48	2:06	1:41	1:24							

ATLANTA, GEORGIA

Amdt 22 22APR21

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

33°38'N-84°26'W

ILS or LOC RWY 26L

SE-4: 11 JUN 2026 to 09 JUL 2026

SE-4: 11 JUN 2026 to 09 JUL 2026

ATLANTA, GEORGIA

AL-26 (FAA)

26190


LOC/DME I-BRU 108.7 Chan 24	APP CRS 275°	Rwy Ldg 9999 TDZE 996 Apt Elev 1026 1026	26L 8500 26R 990
---	------------------------	--	---------------------------

ILS or LOC RWY 26L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)




RADAR required.

▼ Inop table does not apply to sidestep Rwy 26R Cats A and B. For inop ALS, increase S-ILS 26L all Cats visibility to RVR 4500 and S-LOC 26L Cat E visibility to RVR 6000. For inop ALS to Rwy 26R, increase sidestep 26R Cat E visibility to 2 SM. Simultaneous approach authorized.




MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 on heading 290° and RMG R-132 to DALAS INT/RMG VORTAC 18.5 DME and hold.

D-ATIS 119.65	ATLANTA APP CON 134.725 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4	ALL RWYS 121.9	GND CON [8L-26R, 8R-26L] [9L-27R, 9R-27L] 10-28 RWYS 121.75 121.65 254.4
-------------------------	---	--	--------------------------	---

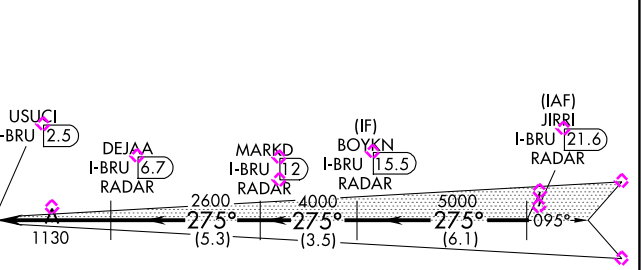

ELEV 1026	D	TDZE 26L 996 TDZE 26R 990
-----------	---	------------------------------

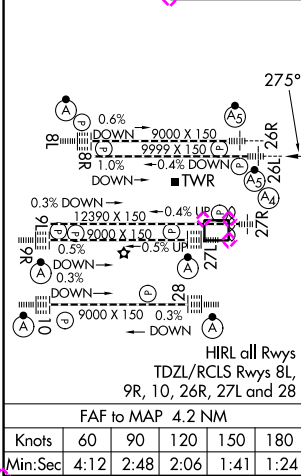

1500	4000	hdg 290°	RMG R-132	DALAS	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 63).
USUCI I-BRU 2.5	DEJAA I-BRU 6.7 RADAR	MARKD I-BRU 12 RADAR	BOYKN I-BRU 15.5 RADAR	JIRRI I-BRU 21.6 RADAR	
2600	4000	5000	275°	095°	
0.7 NM	4.2 NM	5.3 NM	3.5 NM	6.1 NM	
CATEGORY	A	B	C	D	E
S-ILS 26L	1280/24 284 (300-1/2)				
S-LOC 26L	1380/24 384 (400-1/2)		1380/35 384 (400-5/8)		
SIDESTEP 26R	1380/55 390 (400-1)			1380-1 1/2 390 (400-1 1/2)	

ATLANTA, GEORGIA
Amdt 22 22APR21

HARTSFIELD/JACKSON ATLANTA INTL (ATL)
33°38'N-84°26'W
ILS or LOC RWY 26L

SE-4: 09 JUL 2026 to 06 AUG 2026

SE-4: 09 JUL 2026 to 06 AUG 2026