

ATLANTA, GEORGIA

AL-26 (FAA)

26078

LOC/DME I-FSQ 108.5 Chan 22	APP CRS 275°	Rwy Ldg 27L 8865 TDZE 999 Apt Elev 1026	27R 11890 985 1026
---	------------------------	--	-----------------------------

ILS or LOC RWY 27L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

DME or RADAR required.
RADAR required for procedure entry.


Simultaneous approach authorized.
Inop table does not apply to Sidestep Rwy 27R.

Rwy 27L
ALSIF-2

Rwy 27R
MALS

MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 on heading 265° and RMG VORTAC R-165 to DUTIE/RMG 31.3 DME/RADAR and hold.

D-ATIS 119.65	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4	ALL RWYS 121.9	GND CON 121.75 121.65 254.4	ALL RWYS
-------------------------	---------------------------------------	--	--------------------------	---------------------------------------	----------

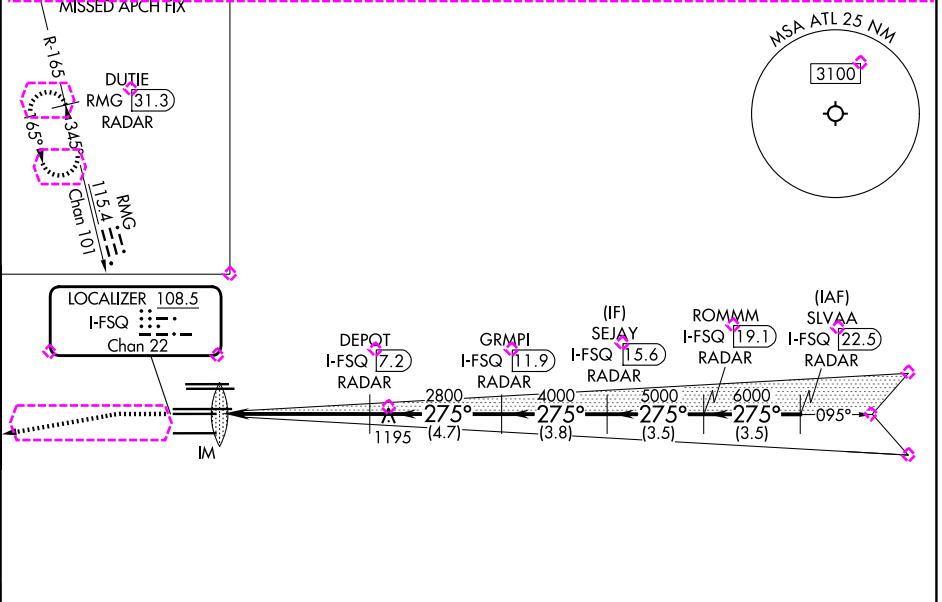

ELEV 1026 **D** TDZE 27L 999
TDZE 27R 985

HIRL all Rwy
TDZL/RCLS Rwy 8L,
9R, 10, 26R, 27L and 28

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

1500 4000
hdg 265°

RMG R-165

DUTIE RMG 31.3

VGSI and ILS glidepath not coincident (VGSI Angle 3.00°/TCH 79°).

SLVAA I-FSQ 22.5

ROMMM I-FSQ 19.1

SEJAY I-FSQ 15.6

GRMPI I-FSQ 11.9

DEPOT I-FSQ 7.2

IM

275°

7000

2800

4000

5000

6000

GS 3.00° TCH 58

0.1 NM	4.4 NM	4.7 NM	3.8 NM	3.5 NM	3.5 NM
CATEGORY	A	B	C	D	
S-ILS 27L	1199/18 200 (200-½)				
S-LOC 27L	1420/24	421 (400-½)	1420/40	421 (400-¾)	
SIDESTEP 27R	1420-1½	435 (400-1½)	1420-2¼	435 (400-2¼)	1420-2¾

ATLANTA, GEORGIA

AL-26 (FAA)

26190

LOC/DME I-FSQ 108.5 Chan 22	APP CRS 275°	Rwy Ldg 27L 8865 11890 TDZE 999 985 Apt Elev 1026 1026
---	------------------------	--


ILS or LOC RWY 27L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

DME or RADAR required.
RADAR required for procedure entry.




Simultaneous approach authorized.

Inop table does not apply to Sidestep Rwy 27R.





MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 on heading 265° and RMG VORTAC R-165 to DUTIE/RMG 31.3 DME/RADAR and hold.

D-ATIS 119.65	ATLANTA APP CON 134.725 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4	ALL RWYS 121.9	GND CON 121.75 121.65 254.4	ALL RWYS
-------------------------	---	--	--------------------------	---------------------------------------	----------

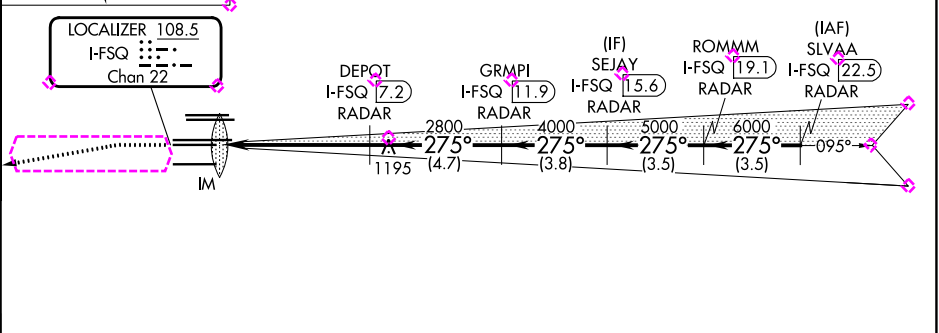

ELEV 1026	TDZE 27L 999 TDZE 27R 985
-----------	------------------------------

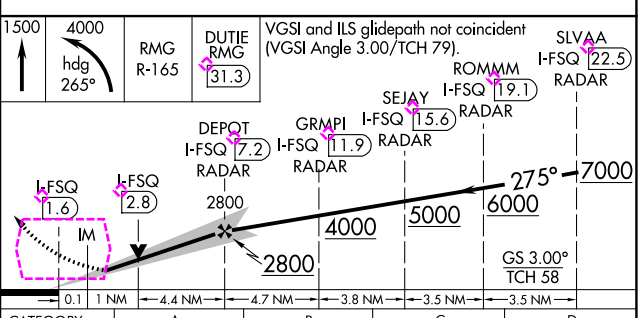

HIRL all Rwy TDZL/RCLS Rwy 8L, 9R, 10, 26R, 27L and 28	FAF to MAP 5.5 NM	Knots 60 90 120 150 180	Min:Sec 5:30 3:40 2:45 2:12 1:50
S-ILS 27L	1199/18 200 (200-½)		
S-LOC 27L	1420/24 421 (400-½)	1420/40 421 (400-¾)	
SIDESTEP 27R	1420-1½ 435 (400-1½)	1420-2¼ 435 (400-2¼)	1420-2¾ 435 (400-2¾)

SE-4: 09 JUL 2026 to 06 AUG 2026

SE-4: 09 JUL 2026 to 06 AUG 2026