

26106

WAAS CH 56300 W26A	APP CRS 275°	Rwy Ldg 9999 TDZE 996 Apt Elev 1026
--	------------------------	--

RNAV (GPS) RWY 26L
HARTSFIELD/JACKSON ATLANTA INTL (ATL)




T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For rnp MALSR, increase LPV all Cats visibility to Rwy 4500, LNAV/VNAV all Cats visibility to Rwy 6000. Simultaneous approach authorized with Rwy 27L or 27R or 28. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR




MISSED APPROACH:
Climb to 1500 then
climbing right turn to
3500 direct TROYS
and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER						ALL RWYS	GND CON			ALL RWYS
119.65	127.9 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	10-28	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	10-28	254.4
		119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4	




ELEV 1026 TDZE 996

RADAR REQUIRED



HIRL all Rwy's
TDZL/RCLS Rwy's 8L,
9R, 10, 26R, 27L and 28

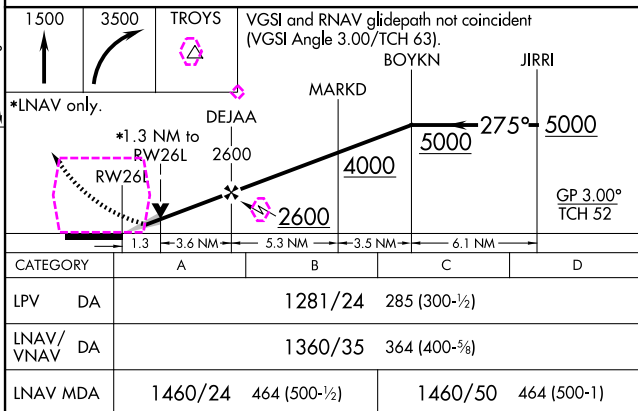

ATLANTA, GEORGIA
Amdt 4 18SEP14

33°38'N-84°26'W

HARTSFIELD/JACKSON ATLANTA INTL (ATL)
RNAV (GPS) RWY 26L

ATLANTA, GEORGIA

AL-26 (FAA)

26190

WAAS CH 56300 W26A	APP CRS 275°	Rwy Ldg TDZE 996 Apt Elev 1026
--	------------------------	--

RNAV (GPS) RWY 26L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)





For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LPV alt Cats visibility to RVR 4500, LNAV/VNAV all Cats visibility to RVR 6000. Simultaneous approach authorized with Rwy 27L or 27R or 28. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH:

Climb to 1500 then climbing right turn to 3500 direct TROYS and hold.

D-ATIS 119.65	ATLANTA APP CON 134,725 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4					ALL RWYS 121.9	GND CON (8L-26R,8R-26L) (9L-27R,9R-27L) 10-28 121.75 121.65 254.4	ALL RWYS
-------------------------	--	--	--	--	--	--	-----------------------------	--	-------------

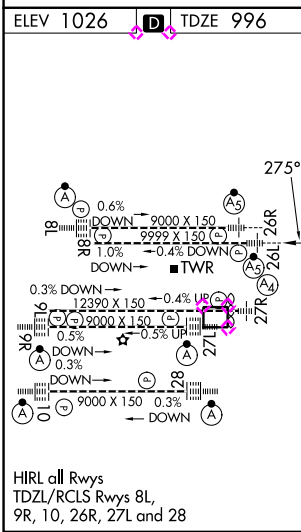

RADAR REQUIRED

1500	3500	TROYS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 63).	
*LNAV only.		DEJAA	MARKD	JIRRI
*1.3 NM to RWY 26L		2600	4000	5000
1.3		3.6 NM	5.3 NM	3.5 NM
6.1 NM		GP 3.00° TCH 52		
CATEGORY	A	B	C	D
LPV DA	1281/24		285 (300-½)	
LNAV/VNAV DA	1360/35		364 (400-⅝)	
LNAV MDA	1460/24	464 (500-½)	1460/50	464 (500-1)

ATLANTA, GEORGIA
Amdt 4 18SEP14

33°38'N-84°26'W

HARTSFIELD/JACKSON ATLANTA INTL (ATL)
RNAV (GPS) RWY 26L

SE-4: 09 JUL 2026 to 06 AUG 2026

SE-4: 09 JUL 2026 to 06 AUG 2026