

WAAS CH 70400 W27B	APP CRS 275°	Rwy Ldg 11890 TDZE 985 Apt Elev 1026
--	------------------------	---

RNAV (GPS) RWY 27R
HARTSFIELD/JACKSON ATLANTA INTL (ATL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 28, or Rwys 26R and 28. DME/DME RNP-0.3 NA. For Inop MALS, increase LNAV/VNAV Cat D visibility and LNAV Cats C and D visibility ¼ mile. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. Inop table does not apply to LPV, all Cats.

MALS



MISSED APPROACH:
Climb to 4000 direct
ROTLE and on track
272° to TEMPO and
hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER					ALL RWYS	GND CON			ALL RWYS
119.65	127.9 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	(8L-26R,8R-26L)	9L-27R	9R-27L	10-28	
		119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4



MISSED APCH FIX



TEMPO

5.09


ELEV 1026

D	TDZE 985
---	----------

RADAR REQUIRED



HIRL all Rwy's
TDZL/RCLS Rwy's 8L,
9R, 10, 26R, 27L and 28

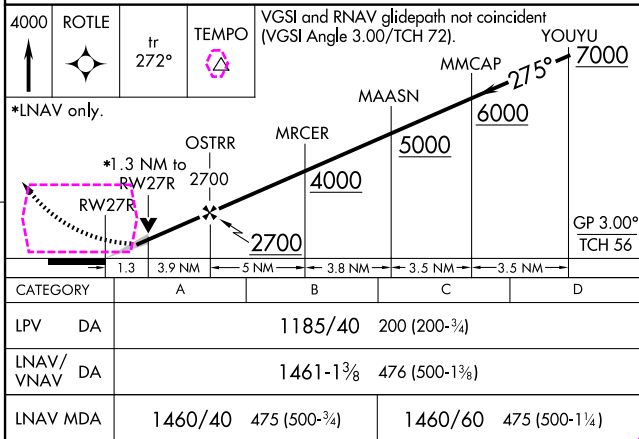

ATLANTA, GEORGIA

Amdt 4 18SEP14

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

33°38'N-84°26'W

RNAV (GPS) RWY 27R

SE-4, 11 JUN 2026 to 09 JUL 2026

ATLANTA, GEORGIA

AL-26 (FAA)

26190

WAAS CH 70400 W27B	APP CRS 275°	Rwy Ldg 11890 TDZE 985 Apt Elev 1026
--	------------------------	---

RNAV (GPS) RWY 27R


HARTSFIELD/JACKSON ATLANTA INTL (ATL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 28, or Rwy 26R and 28. DME/DME RNP-0.3 NA. For inop MALS, increase LNAV/VNAV Cat D visibility and LNAV Cats C and D visibility ¼ mile. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. Inop table does not apply to LPV, all Cats.


MALS

MISSED APPROACH:
Climb to 4000 direct
ROTLE and on track
272° to TEMPO and
hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER					ALL	GND CON			ALL
119.65	134.725 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	RWYS
		119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4




MISSED APCH FIX



ELEV 1026 **D** TDZE 985

RADAR REQUIRED



4000

ROTLE

tr 272°

TEMPO

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

*LNAV only.

YOUYU 7000

MMCAP 6000

MAASN 5000

MRCER 4000

OSTRR 2700

RWY 27R 2700

GP 3.00° TCH 56

CATEGORY	A	B	C	D
LPV DA	1185/40		200 (200-¾)	
LNAV/VNAV DA	1461-1⅓		476 (500-1⅓)	
LNAV MDA	1460/40		1460/60	475 (500-1¼)

ATLANTA, GEORGIA
Amdt 4 18SEP14

HARTSFIELD/JACKSON ATLANTA INTL (ATL)
33°38'N-84°26'W
RNAV (GPS) RWY 27R

SE-4, 09 JUL 2026 to 06 AUG 2026

SE-4, 09 JUL 2026 to 06 AUG 2026