

ATLANTA, GEORGIA

AL-26 (FAA)

26078




WAAS CH 99300 W08B	APP CRS 095°	Rwy Ldg TDZE 1015 Apt Elev 1026
--	------------------------	---

RNAV (GPS) Y RWY 8L
HARTSFIELD/JACKSON ATLANTA INTL (ATL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV/VNAV all Cnts visibility to 1¼ miles. Helicopter visibility reduction below RVR 4000 NA. LNAV procedure NA during simultaneous operations. Simultaneous approach authorized with Rwy 9L or 9R or 10, or Rwys 9L and 10. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


ALSF-2 MISSED APPROACH:
Climb to 1500 then
climbing left turn to
3500 direct TROYS
and hold.

D-ATIS 119.65	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4	ALL RWYS 121.9	GND CON 121.75 121.65 254.4	ALL RWYS
-------------------------	--	--	-----------------------------	---------------------------------------	-------------

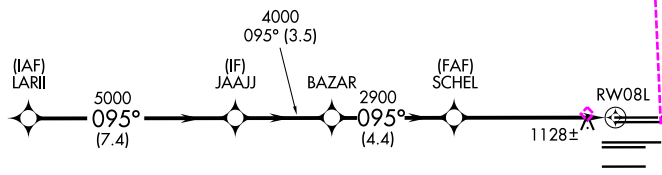


RADAR REQUIRED

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

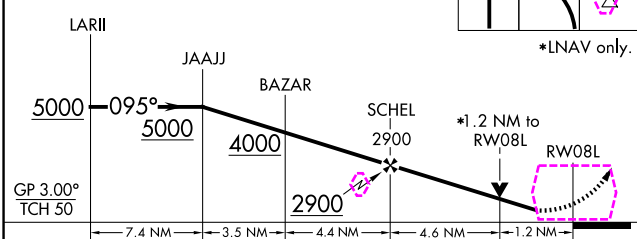

CATEGORY	A	B	C	D
LPV DA		1215/18	200 (200-½)	
LNAV/VNAV DA		1404/45	389 (400-¾)	
LNAV MDA	1460/24	445 (500-½)	1460/45	445 (500-¾)

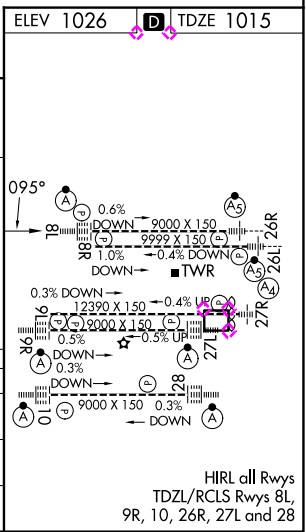

ATLANTA, GEORGIA
Amdt 4A 12OCT17

HARTSFIELD/JACKSON ATLANTA INTL (ATL)
33°38'N-84°26'W
RNAV (GPS) Y RWY 8L

SE-4, 11 JUN 2026 to 09 JUL 2026

SE-4, 11 JUN 2026 to 09 JUL 2026

SE-4. 09 JUL 2026 to 06 AUG 2026