

LOC/DME I-VKQ <u>110.35</u> Chan 40 (Y)	APP CRS 183°	Rwy Ldg 8676 TDZE 748 Apt Elev 748
---	------------------------	---

ILS or LOC RWY 18L
CHARLOTTE/DOUGLAS INTL (CLT)




RADAR required for procedure entry. DME or RADAR required.

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 on CLT VOR/DME R-093 to LOCAS INT/CLT 24.9 DME and hold.


T Simultaneous approach authorized.

Rwy 18L helicopter visibility reduction below RVR 4000 NA.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325	(001°-119°) 257.2 (180°-359°)	118.1	257.8 (18L-36R)	121.8 348.6 (W)
	120.05	(120°-295°) 307.8 (360°-179°)	126.4	257.8 (18C-36C)	121.9 348.6 (E)
	134.75	(296°-360°)	133.35	257.8 (1L-19R)	

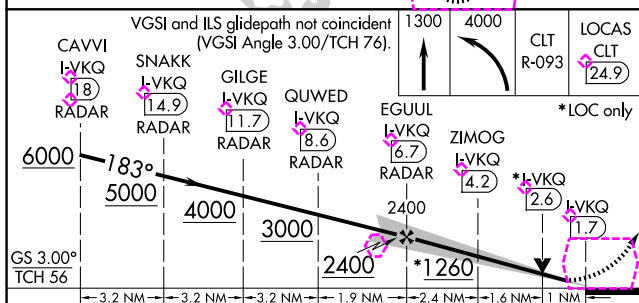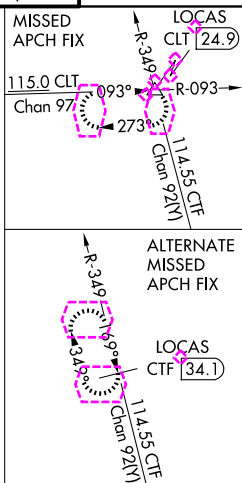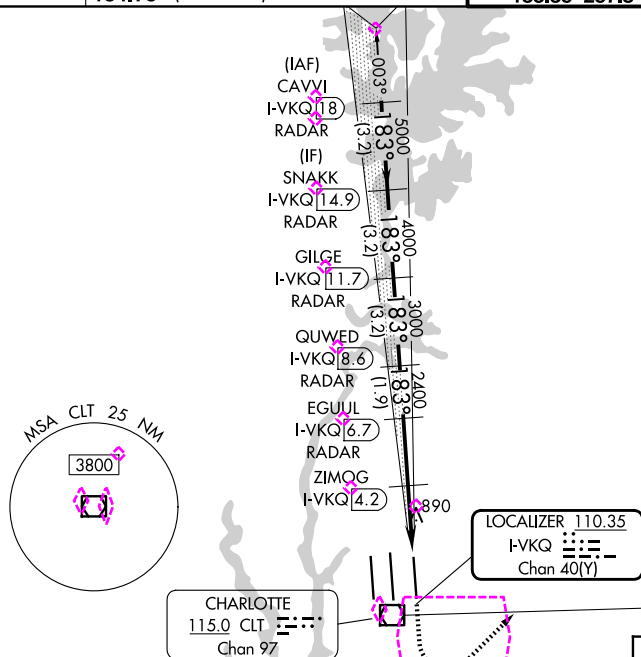

CATEGORY	A	B	C	D
S-ILS 18L	1002/40 254 (300-¾)			
S-LOC 18L	1260/55 512 (600-1)		1260-1⅜ 512 (600-1⅜)	
ZIMOG FIX MINIMUMS (DME REQUIRED)				
S-LOC 18L	1140/55 392 (400-1)		1140/60 392 (400-1¼)	

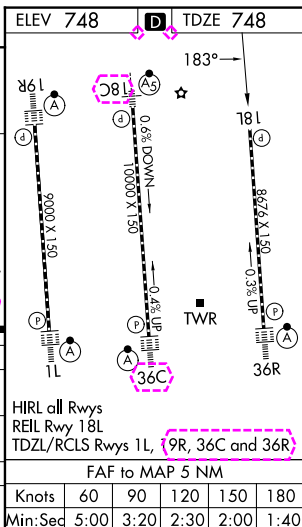

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

26190

LOC/DME I-VKQ
110.35
Chan **40** (Y)

APP CRS
183°

Rwy Ldg
TDZE **748**
Apt Elev **748**


ILS or LOC RWY 18L
CHARLOTTE/DOUGLAS INTL (CLT)

RADAR required for procedure entry. DME or RADAR required.

Simultaneous approach authorized.
Rwy 18L helicopter visibility reduction below RVR 4000 NA.

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 on CLT VOR/DME R-093 to LOCAS INT/CLT 24.9 DME and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	118.1 257.8 (18L-36R) 126.4 257.8 (1R-19L) 133.35 257.8 (1L-19R)	121.8 348.6 (W) 121.9 348.6 (E)

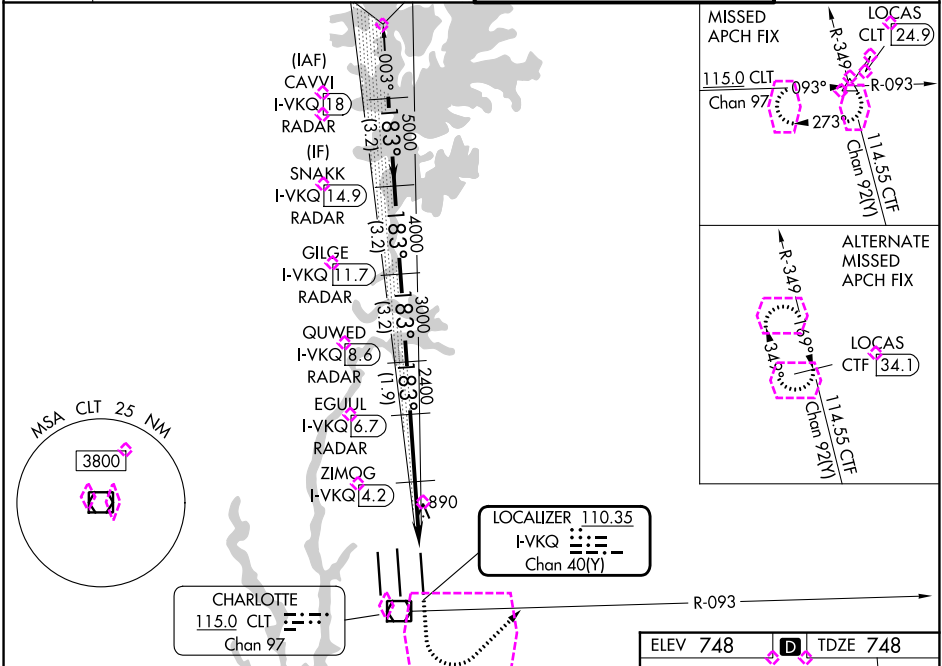

ELEV 748		TDZE 748	
CAVVI I-VKQ (18) RADAR		183°	
SNACK I-VKQ (14.9) RADAR		181	
GILGE I-VKQ (11.7) RADAR		16L	
QUWED I-VKQ (8.6) RADAR		0.65 DOWN	
EGUUL I-VKQ (6.7) RADAR		10000 X 150	
ZIMOG I-VKQ (4.2) RADAR		0.65 UP	
*LOC only		181	
*1260		8676 X 150	
*17		0.3% UP	
*1R		36R	
CATEGORY		TWR	
S-ILS 18L		1002/40 254 (300-¾)	
S-LOC 18L		1260/55 512 (600-1) 1260-1⅓ 512 (600-1⅓)	
ZIMOG FIX MINIMUMS (DME REQUIRED)		FAF to MAP 5 NM	
S-LOC 18L		1140/55 392 (400-1) 1140/60 392 (400-1¼)	
Knots		60 90 120 150 180	
Min:Seq		5:00 3:20 2:30 2:00 1:40	

CHARLOTTE, NORTH CAROLINA

Amdt 10A 07NOV19

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
ILS or LOC RWY 18L

SE-2, 09 JUL 2026 to 06 AUG 2026

SE-2, 09 JUL 2026 to 06 AUG 2026