


CHARLOTTE, NORTH CAROLINA

KRITR EIGHT DEPARTURE (RNAV)

TOP ALTITUDE:
8000

RNAV 1- DME/DME/IRU or GPS.

RADAR required.

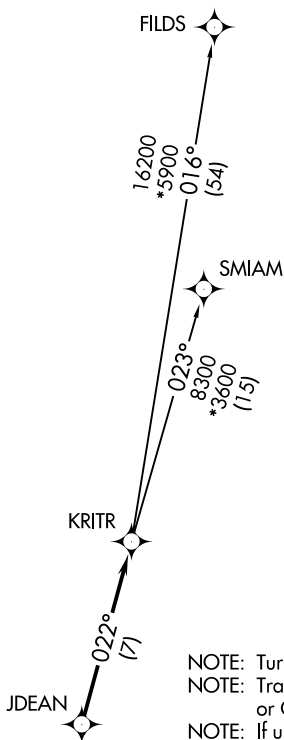


NOTE: Turbojet only.

NOTE: Transponder code will be issued via PDC or CLT CLNC DEL.

NOTE: If unable to accept climb rates, advise ATC on initial contact.


NOTE: Accelerate to 250K, if unable advise ATC.
Upon reaching 10000 MSL, accelerate to
and maintain 280K, if unable advise ATC.

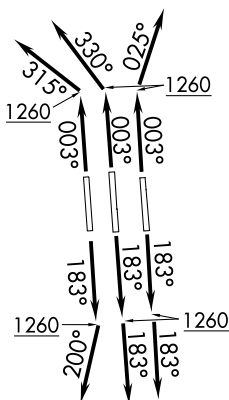

TAKEOFF MINIMUMS

Rwys 1R, 18L, 19L/R, 36R: Standard with minimum climb of 500'/NM to 1260.

Rwy 1L: Standard with minimum climb of 500' / NM to 1400.



NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

KRITR EIGHT DEPARTURE (RNAV)

(KRITR8.KRITR) 09JUL26

CHARLOTTE, NORTH CAROLINA

CHARLOTTE/DOUGLAS INTL (CLT)

SE-2, 09 JUL 2026 to 06 AUG 2026



DEPARTURE ROUTE DESCRIPTION

SEE ADDITIONAL REQUIREMENTS ON AAUP

TAKEOFF RUNWAY 1L: Climb on heading 003° to 1260, then on heading 315° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .

TAKEOFF RUNWAY 1R: Climb on heading 003° to 1260, then on heading 330° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .

TAKEOFF RUNWAYS 18L, 19L: Climb on heading 183° to 1260, then on heading 183° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .

TAKEOFF RUNWAY 19R: Climb on heading 183° to 1260, then on heading 200° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .

TAKEOFF RUNWAY 36R: Climb on heading 003° to 1260, then on heading 025° or as assigned by ATC for RADAR vectors to JDEAN, thence. . .

. . .on track 022° to KRITR, then on assigned transition. Maintain 8000. Expect filed altitude 10 minutes after departure.

FILDS TRANSITION (KRITR8.FILDS)

SMIAM TRANSITION (KRITR8.SMIAM)