

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

26134

WAAS CH 77500 W18A	APP CRS 183°	Rwy Ldg TDZE Apt Elev 8676 748 748
--	------------------------	--

RNAV (GPS) Y RWY 18L


CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.


⚠ Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.
⚠ Rwy 18L helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C.

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct LOCAS and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	118.1 257.8 (18L-36R) 126.4 257.8 (18C-36C) 133.35 257.8 (1L-19R)	121.8 348.6 (W) 121.9 348.6 (E)

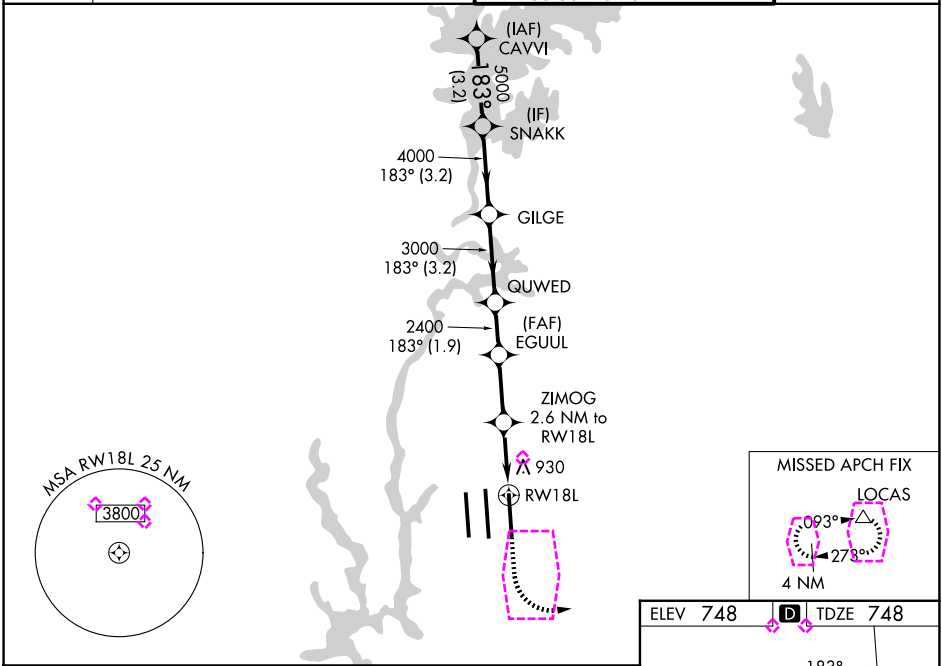

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).				
CAVVI SNAKK GILGE QUWED EGUUL ZIMOG 2.6 NM to RWY18L *1.1 NM to RWY18L				
GP 3.00° TCH 56 6000 5000 4000 3000 2400 *1620				
-3.2 NM -3.2 NM 3.2 NM 1.9 NM 2.4 NM 1.5 NM 1.1 NM				
CATEGORY	A	B	C	D
LPV DA	1002/40		254 (300-¾)	
LNAV/VNAV DA	1216-1⅜		468 (500-1⅝)	
LNAV MDA	1180/55	432 (500-1)	1180-1¼	432 (500-1¼)
CIRCLING	1380-1	632 (700-1)	1500-2¼	1500-2½
			752 (800-2¼)	752 (800-2½)

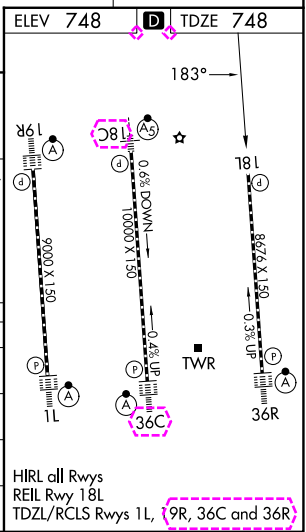

CHARLOTTE, NORTH CAROLINA
Amdt 5 15AUG19

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
RNAV (GPS) Y RWY 18L

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

26190

WAAS CH 77500 W18A	APP CRS 183°	Rwy Ldg TDZE Apt Elev 8676 748 748
--	------------------------	--

RNAV (GPS) Y RWY 18L

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.


- ⚠

Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.


⚠

Rwy 18L helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C.
- MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct LOCAS and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	118.1 257.8 (18L-36R) 126.4 257.8 (1R-19L) 133.35 257.8 (1L-19R)	121.8 348.6 (W) 121.9 348.6 (E)

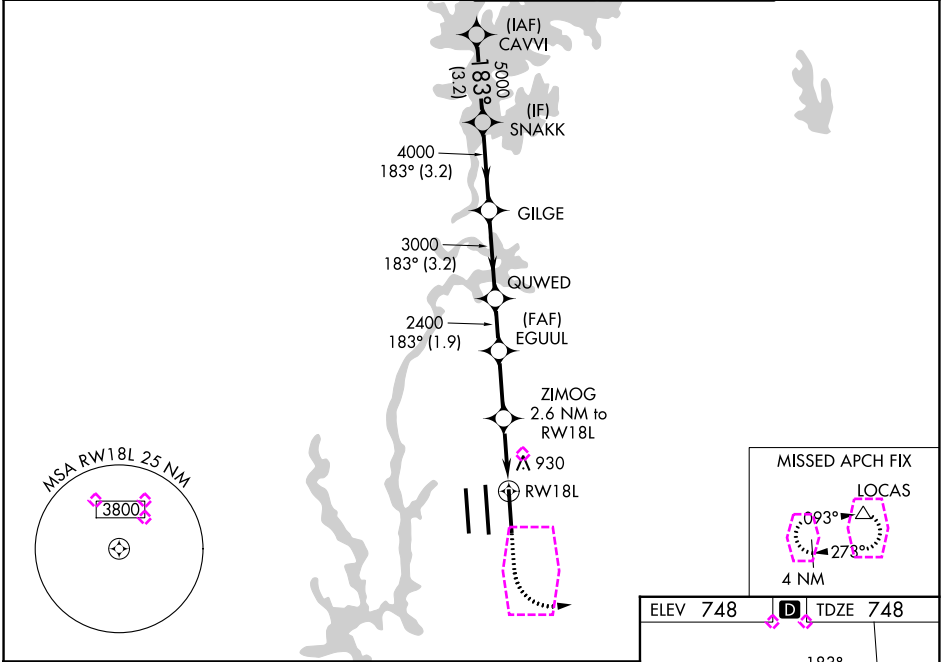

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).				
CAVVI SNAKK GILGE QUWED EGUUL ZIMOG 2.6 NM to RW18L *1.1 NM to RW18L				
GP 3.00° TCH 56 6000 5000 4000 3000 2400 *1620				
-3.2 NM -3.2 NM 3.2 NM 1.9 NM 2.4 NM 1.5 NM 1.1 NM				
CATEGORY	A	B	C	D
LPV DA	1002/40		254 (300-¾)	
LNAV/VNAV DA	1216-1⅜		468 (500-1⅝)	
LNAV MDA	1180/55	432 (500-1)	1180-1¼	432 (500-1¼)
CIRCLING	1380-1	632 (700-1)	1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

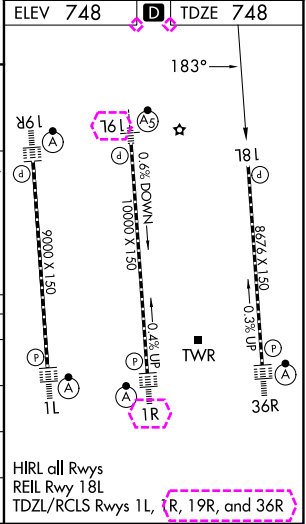

CHARLOTTE, NORTH CAROLINA
Amdt 5 15AUG19

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
RNAV (GPS) Y RWY 18L