

WAAS CH 56515 W01A	APP CRS 003°	Rwy Ldg 9000 TDZE 744 Apt Elev 748
--	------------------------	---

RNAV (GPS) Y RWY 1L
CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH - GPS.

T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
A Use of FD or AP required during simultaneous operations. Circling NA at night.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C.
 For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct BUDKE and hold.

D-ATIS	CHARLOTTE APP CON	
121.15	128.325 (001°-119°)	257.2 (180°-359°)
	120.05 (120°-295°)	307.8 (360°-179°)
	134.75 (296°-360°)	

CHARLOTTE TOWER

118.1	257.8	(18L-36R)
126.4	257.8	(78C-36C)
133.35	257.8	(1L-19R)

GND CON
121.8 348.6 (W)
121.9 348.6 (E)

MISSED APCH FIX

MSA RW01L 25 NM

3800

ELEV 748 **D** TDZE 744
HIRL all Rwys
REIL Rwy 18L
TDZL/RCLS Rwys 1L, 19R, 36C and 36R

1200 4000 BUDKE

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 70).

WELET 003° 7000 6000

NLSON 2500 DEFOX CUNUK LONIA NUXXY 5000 4000 3000 2500 2000

1 NM to RW01L

1 NM 4.3 NM 1.6 NM 3.2 NM 3.2 NM 3.2 NM 3.2 NM

GP 3.00° TCH 55

CATEGORY		A	B	C	D
LPV	DA	944/18		200 (200-½)	
INAV/ VNAV	DA	1049/24		305 (400-½)	
INAV MDA		1140/24	396 (400-½)	1140/35	396 (400-½)
CIRCLING		1380-1	632 (700-1)	1380-2¼ 632 (700-2¼)	1500-2½ 752 (800-2½)

CHARLOTTE, NORTH CAROLINA
Amdt 2 14MAY26

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
RNAV (GPS) Y RWY 1L

SE-2, 11 JUN 2026 to 09 JUL 2026

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)



26190

WAAS CH 56515 W01A	APP CRS 003°	Rwy Ldg TDZE 744 Apt Elev 748
--	------------------------	---

RNAV (GPS) Y RWY 1L

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH - GPS.		ALSIF-2	MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct BUDKE and hold.
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.			
D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	118.1 257.8 (18L-36R) 126.4 257.8 (1R-19L) 133.35 257.8 (1L-19R)	121.8 348.6 (W) 121.9 348.6 (E)

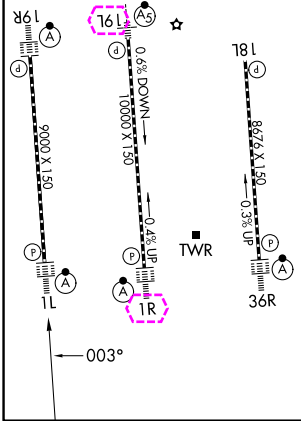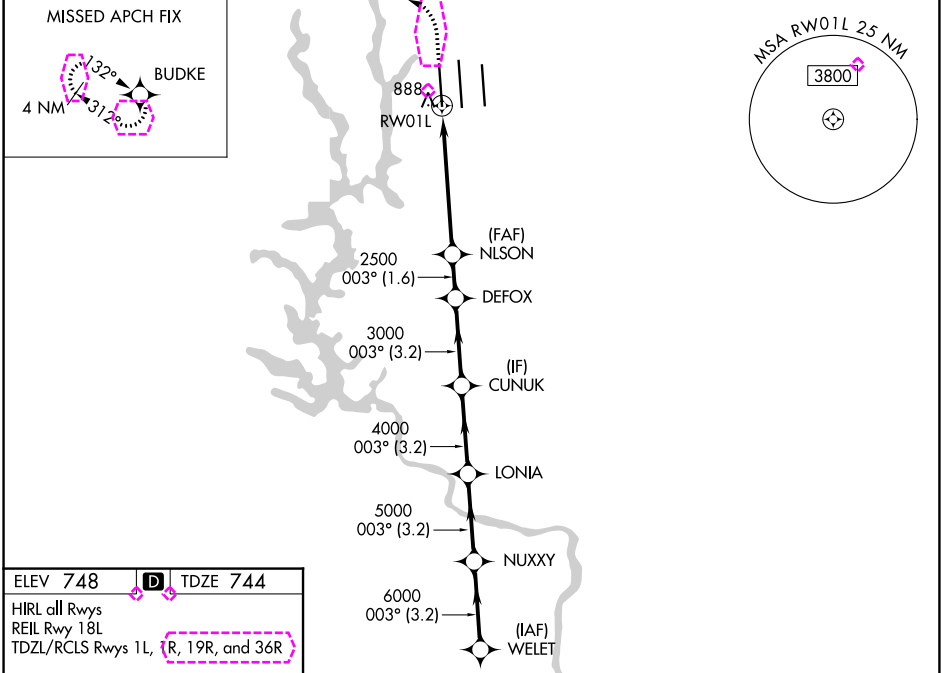

1200 4000 BUDKE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).		WELET	
		NLSON	DEFOX	CUNUK	LONIA
1 NM		4.3 NM	1.6 NM	3.2 NM	3.2 NM
CATEGORY	A	B	C	D	
LPV DA	944/18		200 (200-½)		
LNAV/VNAV DA	1049/24		305 (400-½)		
LNAV MDA	1140/24	396 (400-½)	1140/35	396 (400-¾)	
CIRCLING	1380-1	632 (700-1)	1380-2¼ 632 (700-2¼)	1500-2½ 752 (800-2½)	