

APP CRS	Rwy Ldg 11134
251°	TDZE 104
	Apt Elev 128

RNAV (RNP) Z RWY 25R

LOS ANGELES INTL (LAX)


▼

For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). Simultaneous approach authorized. Simultaneous approach authorized with HHR. GPS required. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 2000 on track 251° to ZIMRU and track 188° to CATLY and hold.

D-ATIS	SOCAL APP CON	LOS ANGELES TOWER	GND CON
133.8	124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	133.9 239.3 (N) 120.95 379.1 (S)	121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)

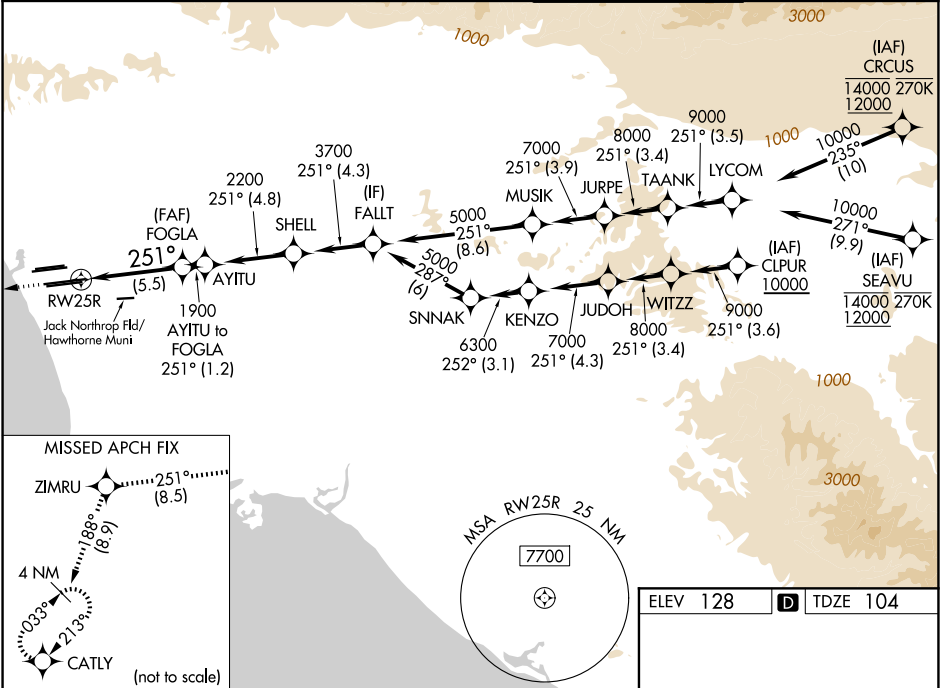

2000

↑

tr 251°

ZIMRU

tr 188°

CATLY

See planview for multiple IF locations.

FOGLA

1900

AYITU

2200

RWY 25R

GP 3.00°

TCH 54

5.5 NM

1.2 NM

CATEGORY	A	B	C	D
RNP 0.11 DA		453/40	349 (400-¾)	
RNP 0.30 DA		544/50	440 (500-1)	

AUTHORIZATION REQUIRED

ELEV 128

TDZE 104

8926 X 150

10885 X 150

2223 X 150

1095 X 200

251°

25R

0.3% UP

0.3% UP

TDZ/CL Rwy's 6R, 7L, 24R, and 25L

HIRL all Rwy's