

WAAS  
CH **77927**  
**W12A**

APP CRS  
**121°**

Rwy Ldg  
TDZE **230**  
Apt Elev **261**

**8004**  
**230**  
**261**

**RNAV (GPS) RWY 12**  
SANTA MARIA PUB/CAPT G ALLAN HANCOCK FLD (SMX)

⚠


Circling Rwy 2 NA at night. Baro-VNAV and VDP NA when using San Luis Obispo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use San Luis Obispo altimeter setting and increase LPV DA to 489 feet; increase LNAV/VNAV DA to 622 feet and all visibilities to RVR 3500; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5500. For inop MALSR, increase LNAV Cat C/D visibility to 1½ mile. # RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Vandenberg altimeter setting.

MALSR

MISSED APPROACH:

Climb to 800 then climbing left turn to 5000 direct MQO VORTAC and hold.

|                       |                                               |                                                  |                         |                         |
|-----------------------|-----------------------------------------------|--------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>121.15</b> | SANTA BARBARA APP CON★<br><b>124.15 327.8</b> | SANTA MARIA TOWER★<br><b>118.3 (CTAF) 239.25</b> | GND CON<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|-----------------------|-----------------------------------------------|--------------------------------------------------|-------------------------|-------------------------|

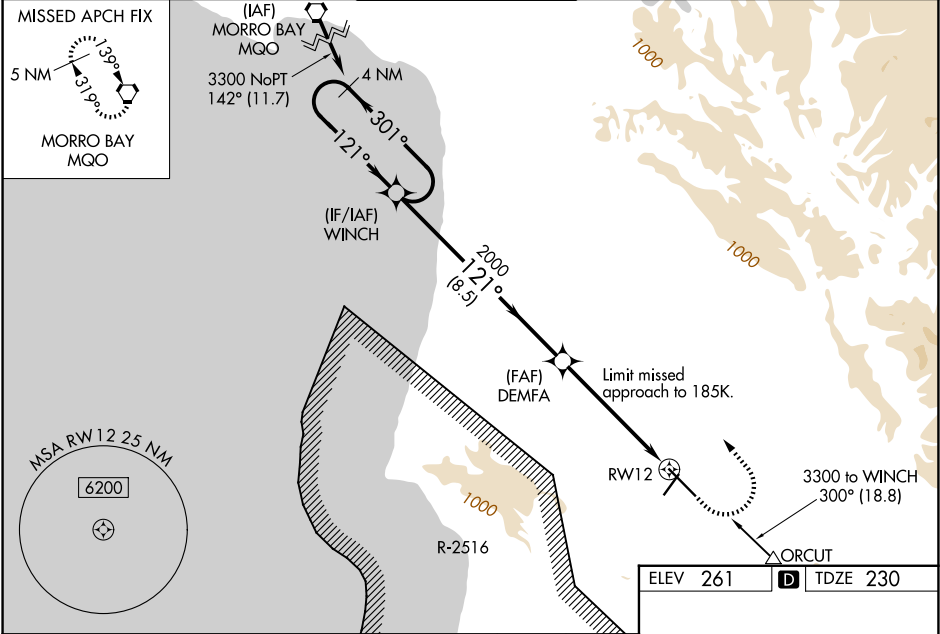

4 NM Holding Pattern

WINCH

3300

301°

121°

2000

121°

DEMFA

2000

\*1.3 NM to RW12

RW12

GP 3.00° TCH 55

8.5 NM

4.2 NM

1.3 NM

800

5000

MQO

\*LNAV only

| CATEGORY     | A                    | B                     | C                       | D                       |
|--------------|----------------------|-----------------------|-------------------------|-------------------------|
| LPV DA#      |                      | 430/24                | 200 (200-½)             |                         |
| LNAV/VNAV DA |                      | 563/32                | 333 (400-⅝)             |                         |
| LNAV MDA     | 680/24               | 450 (500-½)           | 680/50                  | 450 (500-1)             |
| CIRCLING     | 860-1<br>599 (600-1) | 1000-1<br>739 (800-1) | 1420-3<br>1159 (1200-3) | 1540-3<br>1279 (1300-3) |

121°