

APP CRS 274°	Rwy Ldg TDZE Apt Elev	7604 1068 1099
------------------------	-----------------------------	---

RNAV (RNP) Z RWY 27
YAKIMA AIR TRML/MCALLISTER FLD (YKM)


▼ For uncompensated Baro-VNAV systems, procedure NA below -17°C (2°F) or above 54°C (130°F). RF required. GPS required. Missed approach requires RNP less than 1.0. For inop ALS increase *RNP 0.10 DA visibility all Cts to RVR 4500 and RNP 0.374 DA visibility all Cts to 1/4 SM. DATIVE transition NA when R-6714 A, C, D active.

MALSR




MISSED APPROACH: Climb to 5100 on track 274° to YEPCU left turn to JOPDI left turn to ZEMUN left turn to MUDLE and hold.
* Missed approach requires a minimum climb of 215 feet per NM to 4300.

ATIS 125.25	SPOKANE APP CON★ 123.8 263.15	YAKIMA TOWER★ 133.25 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

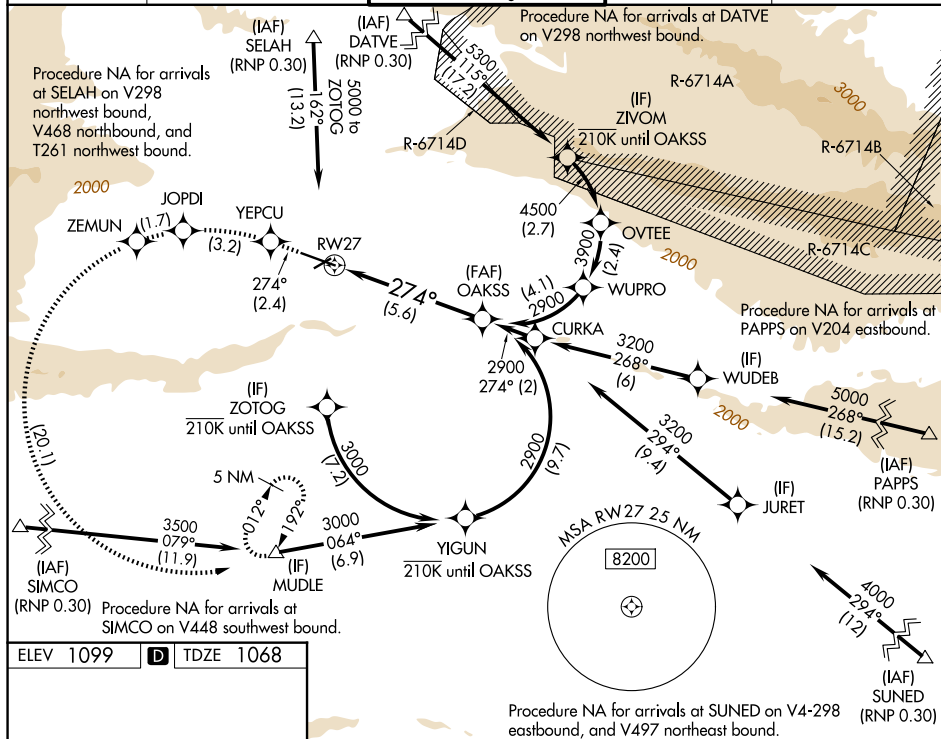

ELEV 1099	D	TDZE 1068
-----------	----------	-----------



MIRL Rwy 4-22
HIRL Rwy 9-27 **L**
REIL Rwy 4, 9, and 22

5100 ↑ tr 274°	YEPCU ✦	JOPDI ✦	ZEMUN ✦	MUDLE △	OAKSS 2900
See planview for multiple IF locations.					
CATEGORY	A	B	C	D	
RNP 0.10 DA*	1348/24 280 (300-½)				
RNP 0.30 DA	1468/45 400 (400-¾)				
AUTHORIZATION REQUIRED					

AUTHORIZATION REQUIRED