

APP CRS
308°

Rwy Ldg
TDZE
430

Apt Elev
477


RNAV (RNP) Y RWY 31L
PALM SPRINGS INTL (PSP)

RNP AR APCH - GPS, RF, min RNP 0.30. Authorization required.

For uncompensated Baro-VNAV systems, procedure NA below 4°C or above 54°C.

MISSED APPROACH: Climb to 900 then climbing right turn to 4000 direct TANFY and track 107° to BANPE and track 144° to TRM VORTAC and hold. Missed approach requires minimum climb of 365 feet per NM to 2200; if unable to meet climb gradient, see RNAV (GPS) Z RWY 31L.

ATIS 124.65	SOCAL APP CON 126.7 370.95 135.275 251.1	PALM SPRINGS TOWER★ 119.7 (CTAF) 377.05	GND CON 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

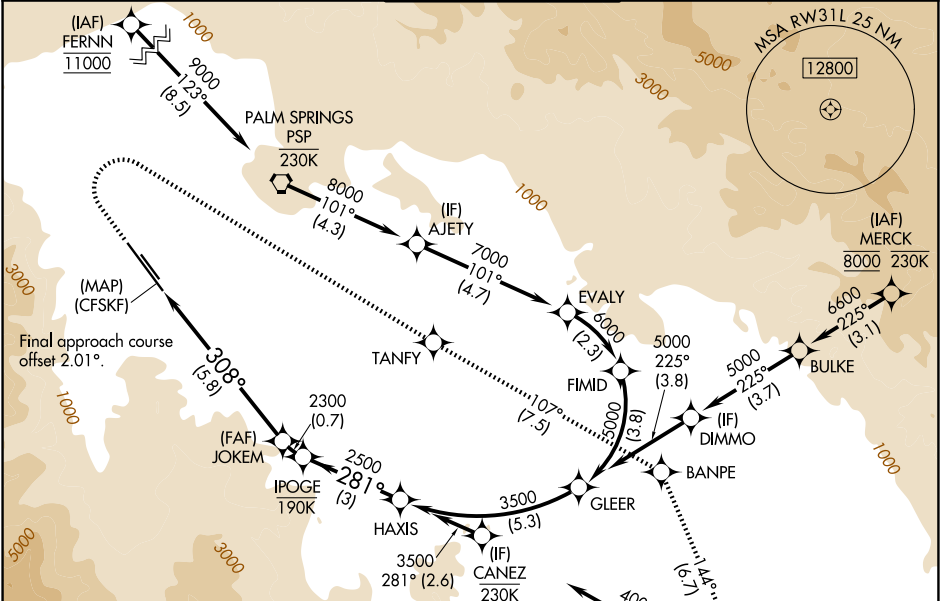

ELEV 477

D

TDZE 430

Procedure NA for arrival on TRM VORTAC airway radials 203 CW 304.

900

4000

TANFY

tr 107°

BANPE

tr 144°

TRM

IPOGE

HAXIS

3500

GP 3.00°

TCH 55

See planview for multiple IF locations.

(CFSKF)

308°

2300

2500

281°

3500

5.8 NM

0.7 NM

3 NM

CATEGORY	A	B	C	D
RNP 0.13 DA		680-¾	250 (300-¾)	
RNP 0.30 DA		718-⅞	288 (300-⅞)	

AUTHORIZATION REQUIRED

PALM SPRINGS, CALIFORNIA
Amdt 2 12JUN25

33°50'N-116°30'W

PALM SPRINGS INTL (PSP)
RNAV (RNP) Y RWY 31L