

HONOLULU, HAWAII

AL-754 (FAA)

25219

LOC/DME H-IUM 110.5 Chan 42	APP CRS 042°	Rwy Ldg TDZE Apt Elev 8950 8 13
---	------------------------	---

ILS Y RWY 4R

DANIEL K INOUEY INTL (HNL) (PHNL)




DME required. From HUBAP: RNAV 1-GPS required.
DME or RADAR required for procedure entry.

For inop ALS, increase S-ILS 4R all Cats visibility to 7/8 SM.

MALSR

MISSED APPROACH: Climb to 540 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL 13.9 DME and hold. *Missed approach requires minimum climb of 318 feet per NM to 1820. (If unable to meet climb gradient use S-ILS 4R minimums).

D-ATIS 127.9 251.15	HCF APPROACH 118.3 269.0	HONOLULU TOWER 118.1 257.8 123.9 273.575 (8R/26L)	GND CON 121.9 348.6	CLNC DEL 121.4 281.4
-------------------------------	------------------------------------	---	-------------------------------	--------------------------------

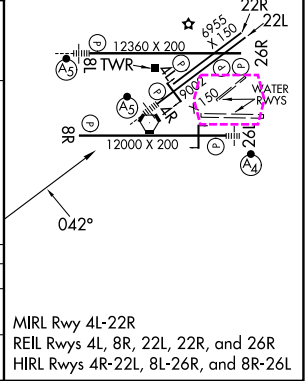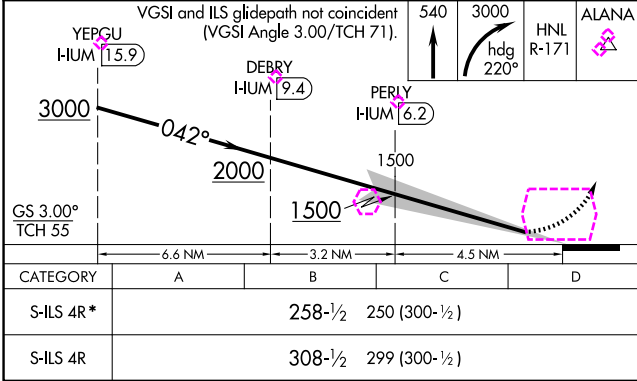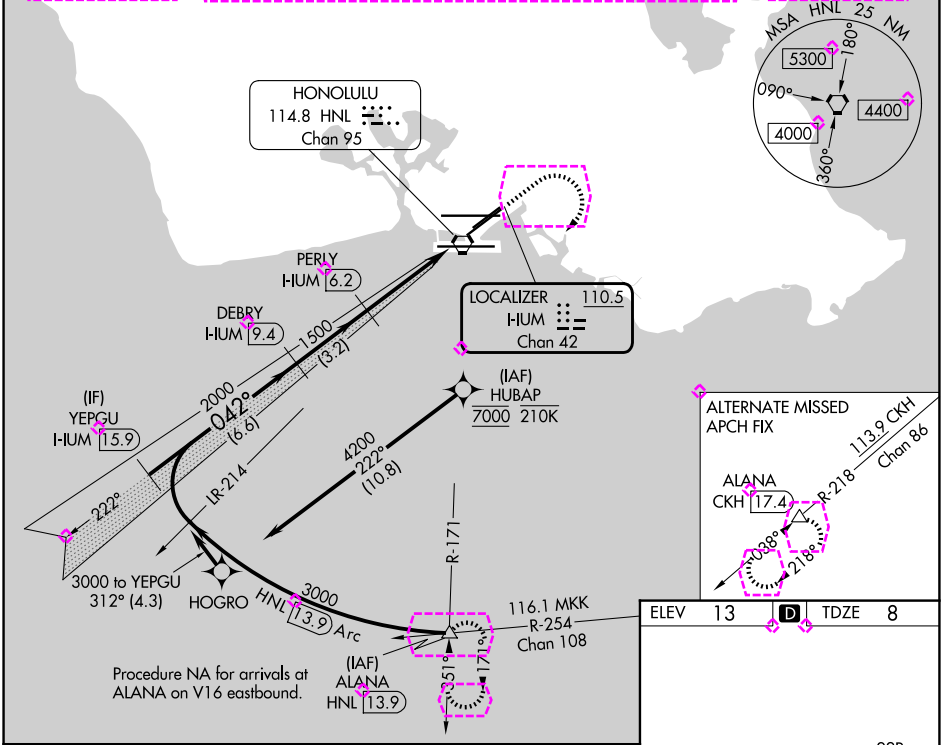

HONOLULU, HAWAII
Amdt 2A 08SEP22

21°19'N-157°55'W

DANIEL K INOUEY INTL (HNL) (PHNL)
ILS Y RWY 4R

PAC: 14 MAY 2026 to 09 JUL 2026

PAC: 14 MAY 2026 to 09 JUL 2026

LOC/DME I-IUM 110.5 Chan 42	APP CRS 042°	Rwy Ldg 8950 TDZE 8 Apt Elev 13
---	------------------------	--

ILS Y RWY 4R

DANIEL K INOUE INTL (HNL) (PHNL)

DME required. From HUBAP: RNAV 1-GPS required.
DME or RADAR required for procedure entry.

MALSR



MISSED APPROACH: Climb to 540 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL 13.9 DME and hold. *Missed approach requires minimum climb of 318 feet per NM to 1820. (If unable to meet climb gradient use S-ILS 4R minimums).

T For inop ALS, increase S-ILS 4R all Cats visibility to $\frac{7}{8}$ SM.

D-ATIS 127.9 251.15	HCF APPROACH 118.3 269.0	HONOLULU TOWER 118.1 257.8 123.9 273.575(8R/26L)	GND CON 121.9 348.6
------------------------	-----------------------------	--	------------------------

