

APP CRS
252°

Rwy Ldg
TDZE
2341

Apt Elev
2351

RNAV (GPS) RWY 24

GENERAL WM J FOX AIRFIELD (WJF)


RNP APCH - GPS.

▼

Rwy 24 helicopter visibility reduction below ¾ NA. VDP NA when using PMD altimeter setting. When local altimeter setting not received, use PMD altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat B/C/D ½ SM, and Circling visibility Cat B/C/D ¼ SM.

MISSED APPROACH: (Do not exceed 210K until PMD VORTAC) Climbing left turn to 7200 direct PMD VORTAC and hold, continue climb-in-hold to 7200.

ATIS 126.3	JOSHUA APP CON 126.1 290.3	FOX TOWER* 118.525 (CTAF) 256.9	GND CON 121.7 256.9	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------------	-------------------------

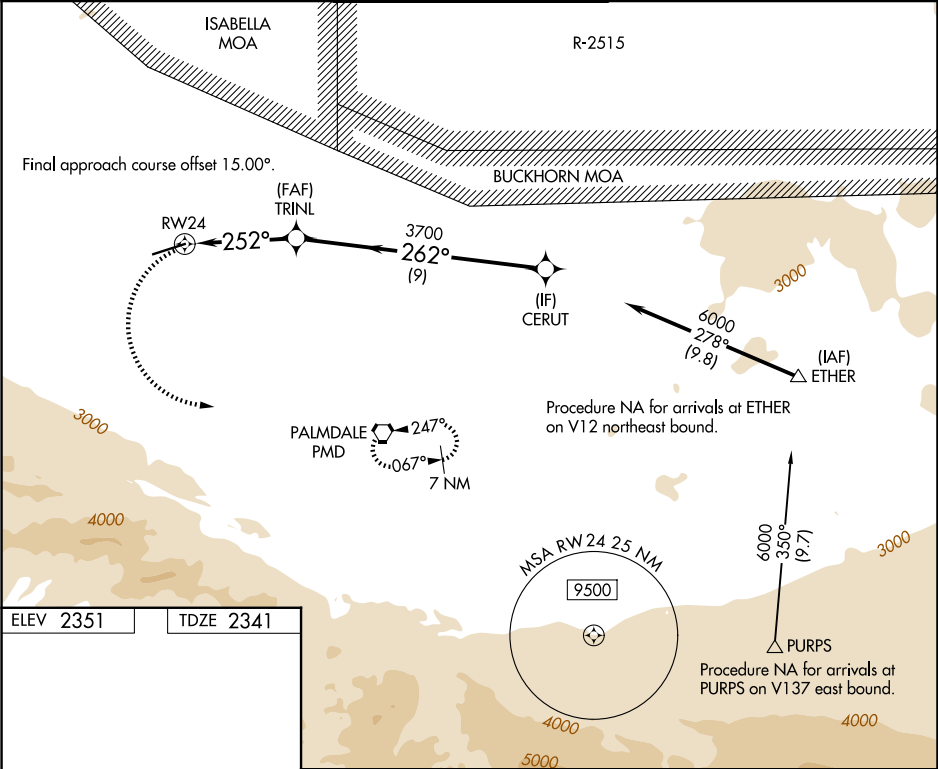

ELEV 2351

TDZE 2341

7200 PMD

252°

7201 x 150

24

RW24

2.2 NM to RW24

3.12° TCH 40

252°

3700

262°

6000

CERUT

TRINL

2.2 NM

1.8 NM

9 NM

CATEGORY	A	B	C	D
LNAV MDA	3080-1	739 (800-1)	3080-2	739 (800-2)
CIRCLING	3080-1	729 (800-1)	3120-2¼ 769 (800-2¼)	3120-2½ 769 (800-2½)

REIL Rwys 6 and 24

MIRL Rwy 6-24